



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®2006 = 17.7

HP Integrity rx3600 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_base2006 = 16.9

CPU2006 license: 03


Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

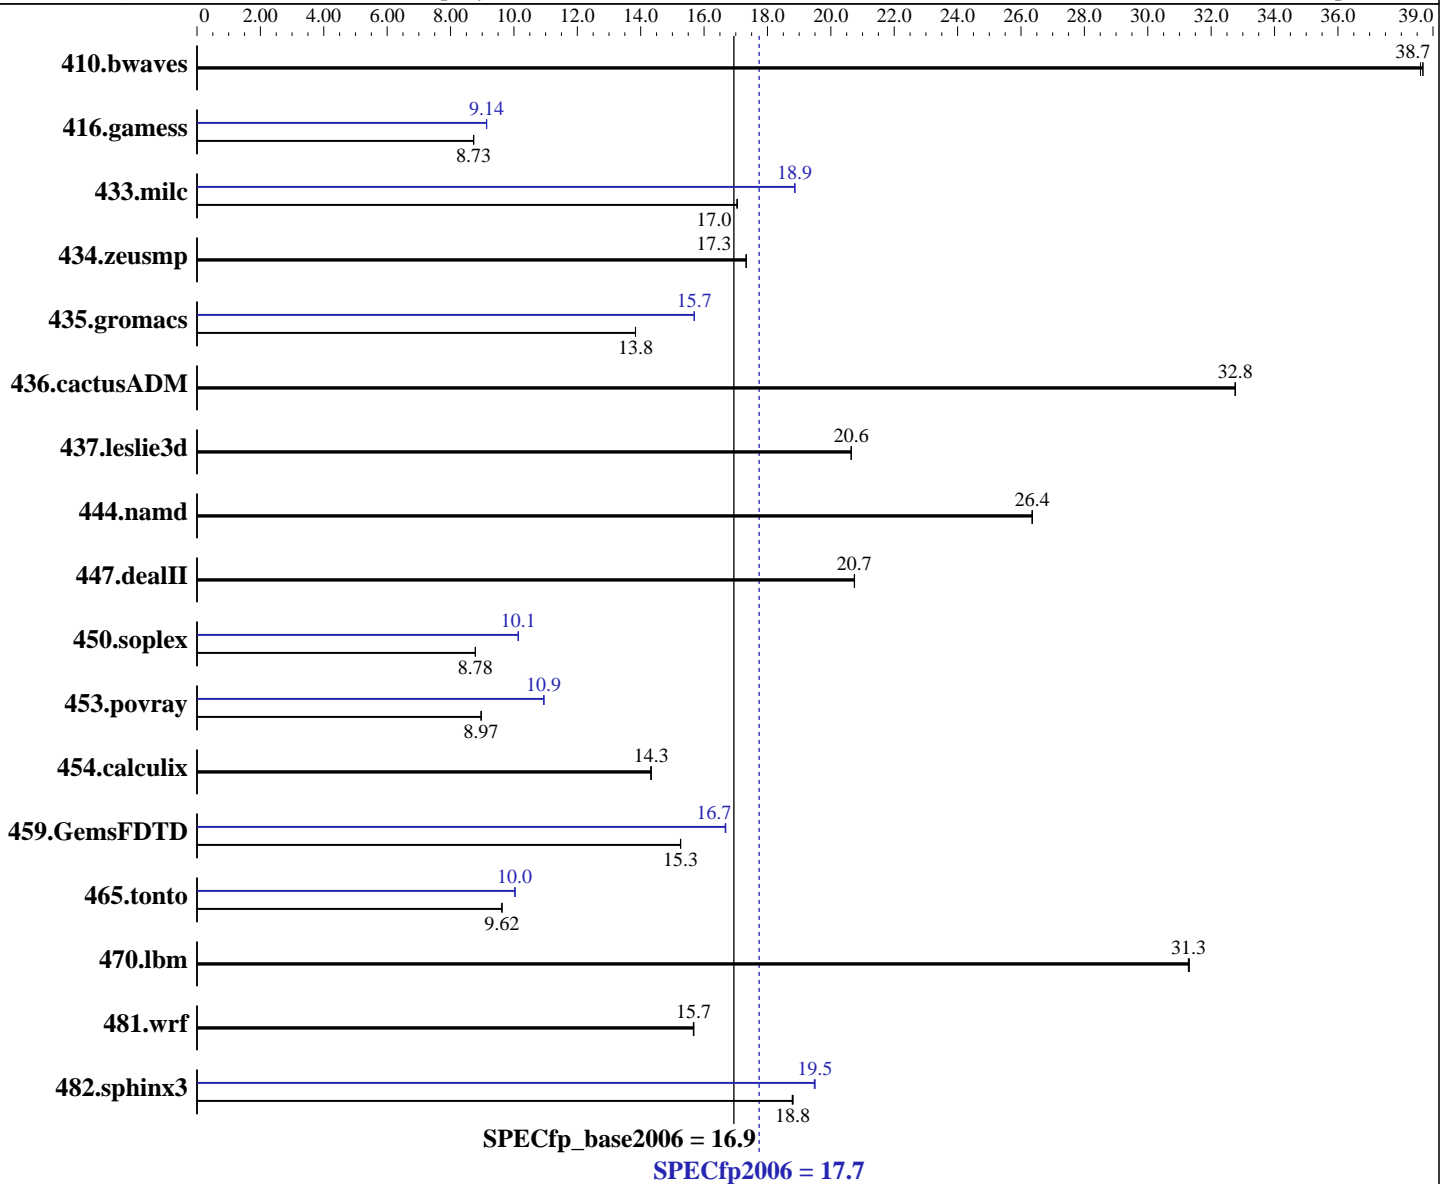

Hardware

CPU Name: Dual-Core Intel Itanium 2 9040
 CPU Characteristics: 1.6GHz/18MB, 533MHz FSB
 CPU MHz: 1600
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1-2 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 1 MB I + 256 KB D on chip per core

Software

Operating System: HPUX11i-TCOE B.11.23.0609
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12
 HP Fortran90 Compiler B.11.23.32
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: None

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.7

HP Integrity rx3600 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_base2006 = 16.9

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

L3 Cache: 9 MB I+D on chip per core
 Other Cache: None
 Memory: 16 GB (8x2GB DIMMs, AD124A 8-DIMM memory carrier)
 Disk Subsystem: 73GB 10K RPM SAS
 Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	352	38.6	<u>351</u>	<u>38.7</u>	351	38.7	352	38.6	<u>351</u>	<u>38.7</u>	351	38.7
416.gamess	2243	8.73	2244	8.73	<u>2243</u>	<u>8.73</u>	2143	9.14	2142	9.14	<u>2143</u>	<u>9.14</u>
433.milc	539	17.0	<u>539</u>	<u>17.0</u>	538	17.0	487	18.9	487	18.9	<u>487</u>	<u>18.9</u>
434.zeusmp	525	17.3	<u>525</u>	<u>17.3</u>	525	17.3	525	17.3	<u>525</u>	<u>17.3</u>	525	17.3
435.gromacs	516	13.8	516	13.8	<u>516</u>	<u>13.8</u>	<u>455</u>	<u>15.7</u>	455	15.7	455	15.7
436.cactusADM	365	32.8	<u>365</u>	<u>32.8</u>	365	32.8	365	32.8	<u>365</u>	<u>32.8</u>	365	32.8
437.leslie3d	455	20.6	<u>455</u>	<u>20.6</u>	455	20.6	455	20.6	<u>455</u>	<u>20.6</u>	455	20.6
444.namd	<u>304</u>	<u>26.4</u>	304	26.4	304	26.4	<u>304</u>	<u>26.4</u>	304	26.4	304	26.4
447.dealII	552	20.7	551	20.7	<u>551</u>	<u>20.7</u>	552	20.7	551	20.7	<u>551</u>	<u>20.7</u>
450.soplex	<u>949</u>	<u>8.78</u>	949	8.78	950	8.78	823	10.1	823	10.1	<u>823</u>	<u>10.1</u>
453.povray	593	8.97	593	8.96	<u>593</u>	<u>8.97</u>	<u>486</u>	<u>10.9</u>	486	10.9	486	10.9
454.calculix	576	14.3	<u>576</u>	<u>14.3</u>	576	14.3	576	14.3	<u>576</u>	<u>14.3</u>	576	14.3
459.GemsFDTD	695	15.3	<u>695</u>	<u>15.3</u>	696	15.3	<u>636</u>	<u>16.7</u>	636	16.7	637	16.7
465.tonto	<u>1023</u>	<u>9.62</u>	1022	9.62	1023	9.62	981	10.0	980	10.0	<u>981</u>	<u>10.0</u>
470.lbm	439	31.3	<u>439</u>	<u>31.3</u>	439	31.3	439	31.3	<u>439</u>	<u>31.3</u>	439	31.3
481.wrf	<u>713</u>	<u>15.7</u>	713	15.7	713	15.7	<u>713</u>	<u>15.7</u>	713	15.7	713	15.7
482.sphinx3	1036	18.8	1038	18.8	<u>1037</u>	<u>18.8</u>	1000	19.5	<u>1000</u>	<u>19.5</u>	1001	19.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```
PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.7

HP Integrity rx3600 (1.6GHz/18MB Dual-Core
Intel Itanium 2)

SPECfp_base2006 = 16.9

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Operating System Notes (Continued)

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```
dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

Platform Notes

The "cpuconfig" EFI command was used prior to booting to deconfigure processors.

Although two cores were enabled during testing, the SPEC CPU2006 benchmarks used only one core.

Base Compiler Invocation

C benchmarks:

```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:

```
/opt/aCC/bin/aCC -Aa
```

Fortran benchmarks:

```
/opt/fortran90/bin/f90
```

Benchmarks using both Fortran and C:

```
/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90
```

Base Portability Flags

```
453.povray: -DSPEC_CPU_NEED_INVHYP
```

```
454.calculix: -DSPEC_CPU_NOZMODIFIER
```

```
481.wrf: -DNOUNDERSCORE +noppu
```

Base Optimization Flags

C benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

C++ benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 3



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.7

HP Integrity rx3600 (1.6GHz/18MB Dual-Core
Intel Itanium 2)

SPECfp_base2006 = 16.9

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Base Optimization Flags (Continued)

Fortran benchmarks:

+Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

Benchmarks using both Fortran and C:

+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N

Peak Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

Fortran benchmarks:

/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:

/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

Peak Portability Flags

453.povray: -DSPEC_CPU_NEED_INVHYP

454.calculix: -DSPEC_CPU_NOZMODIFIER

481.wrf: -DNOUNDERSCORE +noppu

Peak Optimization Flags

C benchmarks:

433.milc: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

470.lbm: basepeak = yes

482.sphinx3: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.7

HP Integrity rx3600 (1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp_base2006 = 16.9

CPU2006 license: 03

Test date: Sep-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

453.povray: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct -Wl,-N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct -Wl,-N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl,-a,archive_shared -Wl,+pd,64M -Wl,+pi,64M
+Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.08.html



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

HP Integrity rx3600 (1.6GHz/18MB Dual-Core
Intel Itanium 2)

SPECfp2006 = 17.7

SPECfp_base2006 = 16.9

CPU2006 license: 03

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Sep-2006

Hardware Availability: Nov-2006

Software Availability: Sep-2006

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.08.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:05:22 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 October 2006.