



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp®2006 = 17.8**

HP Integrity rx2660  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

**SPECfp\_base2006 = 17.0**

CPU2006 license: 03


Test date: Dec-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Feb-2007

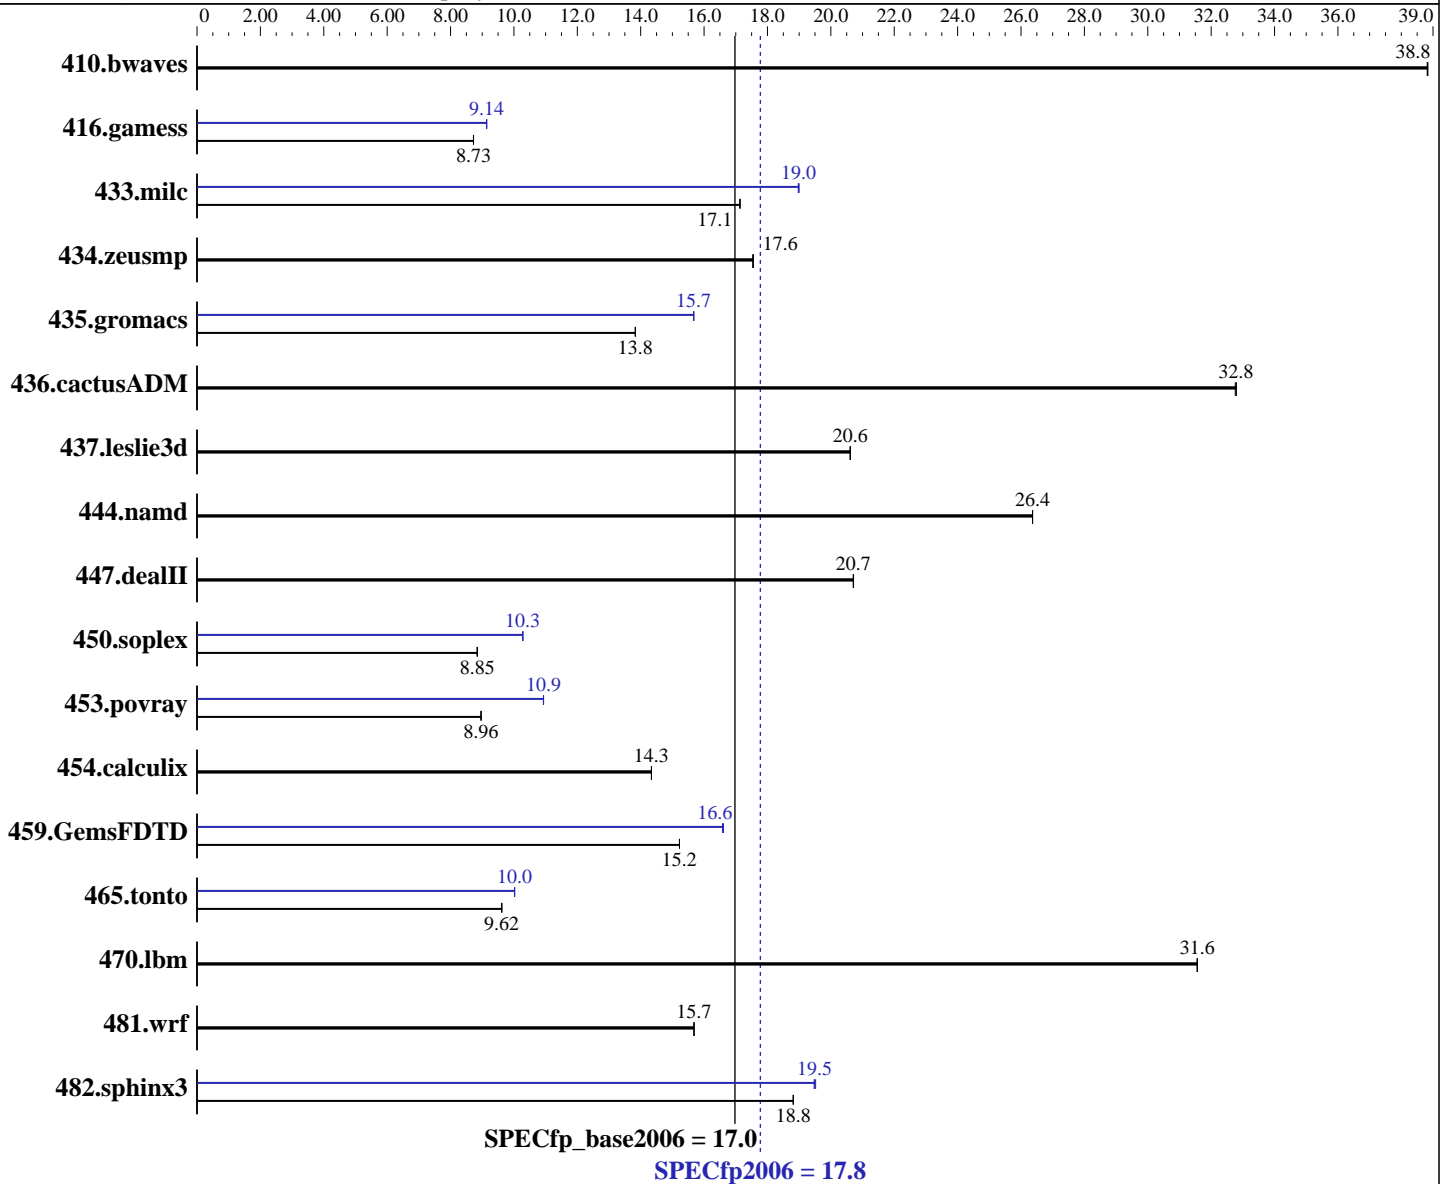

### Hardware

CPU Name: Dual-Core Intel Itanium 2 9040  
 CPU Characteristics: 1.6GHz/18MB, 533MHz FSB  
 CPU MHz: 1600  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1-2 chips  
 Primary Cache: 16 KB I + 16 KB D on chip per core  
 Secondary Cache: 1 MB I + 256 KB D on chip per core

### Software

Operating System: HPUX11i-TCOE B.11.23.0609  
 Compiler: HP C/aC++ Developer's Bundle C.11.23.12  
 HP Fortran90 Compiler B.11.23.32  
 Auto Parallel: No  
 File System: vxfs  
 System State: Multi-user  
 Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: None

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp2006 = 17.8

HP Integrity rx2660  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

SPECfp\_base2006 = 17.0

CPU2006 license: 03

Test date: Dec-2006

Test sponsor: Hewlett-Packard Company

Hardware Availability: Feb-2007

Tested by: Hewlett-Packard Company

Software Availability: Feb-2007

L3 Cache: 9 MB I+D on chip per core  
Other Cache: None  
Memory: 8 GB (4x2GB DIMMs)  
Disk Subsystem: 73GB 10K RPM SAS  
Other Hardware: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	350	38.8	<b>350</b>	<b>38.8</b>	350	38.8	350	38.8	<b>350</b>	<b>38.8</b>	350	38.8
416.gamess	2244	8.73	2245	8.72	<b>2244</b>	<b>8.73</b>	<b>2143</b>	<b>9.14</b>	2142	9.14	2143	9.14
433.milc	<b>536</b>	<b>17.1</b>	536	17.1	536	17.1	484	19.0	483	19.0	<b>484</b>	<b>19.0</b>
434.zeusmp	518	17.6	519	17.5	<b>519</b>	<b>17.6</b>	518	17.6	519	17.5	<b>519</b>	<b>17.6</b>
435.gromacs	<b>516</b>	<b>13.8</b>	516	13.8	516	13.8	455	15.7	<b>456</b>	<b>15.7</b>	456	15.7
436.cactusADM	365	32.8	<b>364</b>	<b>32.8</b>	364	32.8	365	32.8	<b>364</b>	<b>32.8</b>	364	32.8
437.leslie3d	456	20.6	456	20.6	<b>456</b>	<b>20.6</b>	456	20.6	456	20.6	<b>456</b>	<b>20.6</b>
444.namd	304	26.4	304	26.4	<b>304</b>	<b>26.4</b>	304	26.4	304	26.4	<b>304</b>	<b>26.4</b>
447.dealII	552	20.7	552	20.7	<b>552</b>	<b>20.7</b>	552	20.7	552	20.7	<b>552</b>	<b>20.7</b>
450.soplex	944	8.84	<b>943</b>	<b>8.85</b>	943	8.85	<b>811</b>	<b>10.3</b>	812	10.3	811	10.3
453.povray	593	8.97	594	8.96	<b>594</b>	<b>8.96</b>	487	10.9	486	10.9	<b>487</b>	<b>10.9</b>
454.calculix	575	14.3	575	14.3	<b>575</b>	<b>14.3</b>	575	14.3	575	14.3	<b>575</b>	<b>14.3</b>
459.GemsFDTD	697	15.2	697	15.2	<b>697</b>	<b>15.2</b>	<b>640</b>	<b>16.6</b>	640	16.6	639	16.6
465.tonto	<b>1023</b>	<b>9.62</b>	1023	9.61	1023	9.62	982	10.0	981	10.0	<b>982</b>	<b>10.0</b>
470.lbm	435	31.6	435	31.6	<b>435</b>	<b>31.6</b>	435	31.6	435	31.6	<b>435</b>	<b>31.6</b>
481.wrf	712	15.7	712	15.7	<b>712</b>	<b>15.7</b>	712	15.7	712	15.7	<b>712</b>	<b>15.7</b>
482.sphinx3	<b>1036</b>	<b>18.8</b>	1036	18.8	1036	18.8	998	19.5	1001	19.5	<b>1000</b>	<b>19.5</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

The system had the September 2006 HP-UX 11i v2 Technical Computing Operating Environment (TCOE) and compilers installed, along with the following patches:

```

PHSS_34858 linker + fdp cumulative patch
PHSS_34853 Math Library Cumulative Patch
PHSS_34854 Integrity Unwind Library
PHSS_34855 HP C Compiler (A.06.12)
PHSS_34856 aC++ Compiler (A.06.12)
PHSS_34857 u2comp/be/plugin library patch
PHSS_34395 FORTRAN I/O Library [libIO77]
PHSS_34397 FORTRAN Intrinsics [libF90 B.11.23.17]
PHSS_34399 Fortran Product Patch, v3.1 to v3.1.1
PHKL_34020 Perfmon enhancements and Itanium Dual-Core

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 17.8**

HP Integrity rx2660  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

**SPECfp\_base2006 = 17.0**

**CPU2006 license:** 03

**Test date:** Dec-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2007

## Operating System Notes (Continued)

The following kernel tunables were set, in addition to the defaults set by the Technical Computing OE:

```
dbc_max_pct=20
dbc_min_pct=20
maxdsiz=3221225472
maxssiz=401604608
```

## Platform Notes

The "cpuconfig" EFI command was used prior to booting to deconfigure processors.

Although two cores were enabled during testing, the SPEC CPU2006 benchmarks used only one core.

## Base Compiler Invocation

C benchmarks:

```
/opt/ansic/bin/cc -Ae
```

C++ benchmarks:

```
/opt/aCC/bin/aCC -Aa
```

Fortran benchmarks:

```
/opt/fortran90/bin/f90
```

Benchmarks using both Fortran and C:

```
/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90
```

## Base Portability Flags

```
453.povray: -DSPEC_CPU_NEED_INVHYP
```

```
454.calculix: -DSPEC_CPU_NOZMODIFIER
```

```
481.wrf: -DNOUNDERSCORE +noppu
```

## Base Optimization Flags

C benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

C++ benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 17.8**

HP Integrity rx2660  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

**SPECfp\_base2006 = 17.0**

**CPU2006 license:** 03

**Test date:** Dec-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2007

## Base Optimization Flags (Continued)

Fortran benchmarks:

+Ofaster -Wl,-a,archive\_shared -Wl,+pd,64M -Wl,+pi,64M -Wl,-N

Benchmarks using both Fortran and C:

+Ofaster +Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M -Wl,-N

## Peak Compiler Invocation

C benchmarks:

/opt/ansic/bin/cc -Ae

C++ benchmarks:

/opt/aCC/bin/aCC -Aa

Fortran benchmarks:

/opt/fortran90/bin/f90

Benchmarks using both Fortran and C:

/opt/ansic/bin/cc -Ae /opt/fortran90/bin/f90

## Peak Portability Flags

453.povray: -DSPEC\_CPU\_NEED\_INVHYP

454.calculix: -DSPEC\_CPU\_NOZMODIFIER

481.wrf: -DNOUNDERSCORE +noppu

## Peak Optimization Flags

C benchmarks:

433.milc: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

470.lbm: basepeak = yes

482.sphinx3: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp2006 = 17.8**

HP Integrity rx2660  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

**SPECfp\_base2006 = 17.0**

**CPU2006 license:** 03

**Test date:** Dec-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2007

## Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: basepeak = yes

450.soplex: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N

453.povray: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl,-a,archive\_shared -Wl,+pd,64M -Wl,+pi,64M  
+Odataprefetch=direct -Wl,-N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
-Wl,-a,archive\_shared -Wl,+pd,64M -Wl,+pi,64M  
+Odataprefetch=direct -Wl,-N

465.tonto: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
-Wl,-a,archive\_shared -Wl,+pd,64M -Wl,+pi,64M  
+Odataprefetch=direct

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster  
+Otype\_safety=ansi -Wl,-a,archive\_shared -Wl,+pd,64M  
-Wl,+pi,64M +Onoparmsoverlap

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.07.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.07.html)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp2006 = 17.8**

HP Integrity rx2660  
(1.6GHz/18MB Dual-Core Intel Itanium 2)

**SPECfp\_base2006 = 17.0**

**CPU2006 license:** 03

**Test date:** Dec-2006

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Feb-2007

**Tested by:** Hewlett-Packard Company

**Software Availability:** Feb-2007

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.07.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.07.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 10:20:36 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 6 February 2007.