



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp[®]2006 = 14.1

Bull Escala PL450R+ (2100 MHz, 1 CPU)

SPECfp_base2006 = 12.2

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

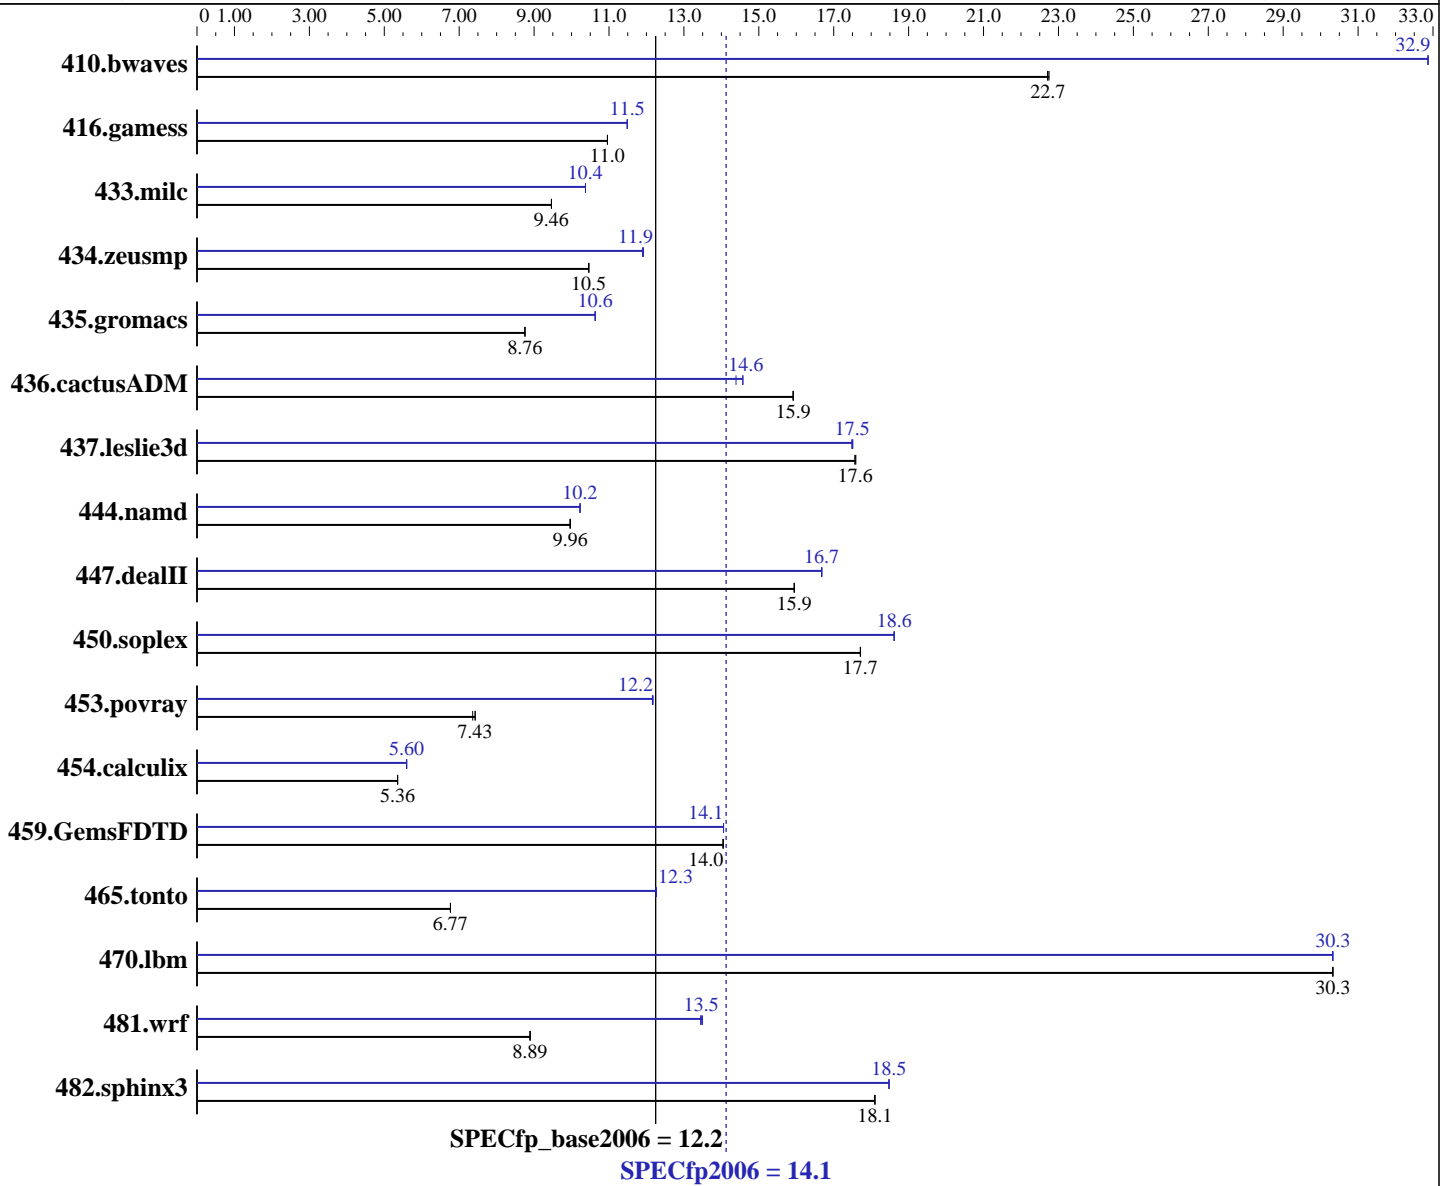

Hardware

CPU Name: POWER5+
 CPU Characteristics:
 CPU MHz: 2100
 FPU: Integrated
 CPU(s) enabled: 1 core, 1 chip, 2 cores/chip
 CPU(s) orderable: 1, 2 chips
 Primary Cache: 64 KB I + 32 KB D on chip per core
 Secondary Cache: 1920 KB I+D on chip per chip

Continued on next page

Software

Operating System: AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 8.0 for AIX with the December 2006 PTF
 XL Fortran Enterprise Edition Version 10.1 for AIX with the November 2006 PTF
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 14.1

Bull Escala PL450R+ (2100 MHz, 1 CPU)

SPECfp_base2006 = 12.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

L3 Cache: 36 MB I+D off chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB)
Disk Subsystem: 2x73 GB SCSI, 15K RPM
Other Hardware: None

Peak Pointers: 32/64-bit
Other Software: ESSL 4.2.0.4

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	598	22.7	597	22.7	598	22.7	413	32.9	413	32.9	413	32.9
416.gamess	1787	11.0	1786	11.0	1787	11.0	1704	11.5	1704	11.5	1705	11.5
433.milc	970	9.46	970	9.46	970	9.46	885	10.4	885	10.4	885	10.4
434.zeusmp	870	10.5	870	10.5	870	10.5	764	11.9	764	11.9	765	11.9
435.gromacs	815	8.76	815	8.76	816	8.76	672	10.6	672	10.6	671	10.6
436.cactusADM	751	15.9	751	15.9	751	15.9	820	14.6	820	14.6	830	14.4
437.leslie3d	534	17.6	535	17.6	535	17.6	537	17.5	537	17.5	538	17.5
444.namd	805	9.96	805	9.97	805	9.96	784	10.2	784	10.2	784	10.2
447.dealII	717	15.9	717	15.9	717	15.9	686	16.7	686	16.7	686	16.7
450.soplex	471	17.7	471	17.7	471	17.7	448	18.6	448	18.6	448	18.6
453.povray	723	7.36	716	7.43	716	7.43	437	12.2	438	12.2	437	12.2
454.calculix	1541	5.36	1540	5.36	1540	5.36	1474	5.60	1474	5.60	1474	5.60
459.GemsFDTD	755	14.0	755	14.0	755	14.0	755	14.1	755	14.1	755	14.1
465.tonto	1454	6.77	1454	6.77	1454	6.77	803	12.3	803	12.3	802	12.3
470.lbm	453	30.3	453	30.3	453	30.3	453	30.3	453	30.3	453	30.3
481.wrf	1256	8.89	1256	8.89	1256	8.90	828	13.5	830	13.5	831	13.4
482.sphinx3	1077	18.1	1077	18.1	1077	18.1	1055	18.5	1055	18.5	1055	18.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

ulimits set to unlimited

bindprocessor command used on submit to bind each copy to a unique processor.

Large page mode was set as follows:

```
vmo -r -o lpgg_regions=800 -o lpgg_size=16777216
```

3 cores were deconfigured and SMT disabled using the AIX commands

```
smtctl -m off -w boot
```

```
bosboot -aD
```

```
shutdown -rF
```

```
drmgr -r -c cpu
```

```
drmgr -r -c cpu
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 14.1

Bull Escala PL450R+ (2100 MHz, 1 CPU)

SPECfp_base2006 = 12.2

CPU2006 license: 20

Test date: Jan-2007

Test sponsor: Bull SAS

Hardware Availability: Feb-2006

Tested by: Bull SAS

Software Availability: Dec-2006

Operating System Notes (Continued)

drmgr -r -c cpu

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS -qipa=noobject
-blpdata -qipa=threads

C++ benchmarks:

-O5 -qlargepage -D_ILS_MACROS -qrtti=all -qipa=noobject -blpdata
-qipa=threads

Fortran benchmarks:

-O5 -qlargepage -qsmallstack=dynlenonheap -qipa=noobject -blpdata
-qipa=threads

Benchmarks using both Fortran and C:

-qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qsmallstack=dynlenonheap -qipa=noobject -blpdata -qipa=threads



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 14.1

Bull Escala PL450R+ (2100 MHz, 1 CPU)

SPECfp_base2006 = 12.2

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Bull SAS

Test date: Jan-2007
Hardware Availability: Feb-2006
Software Availability: Dec-2006

Base Other Flags

C benchmarks:

-bmaxdata:0x40000000 -qsuppress=1500-036

C++ benchmarks:

-bmaxdata:0x50000000 -qsuppress=1500-036

Fortran benchmarks:

-bmaxdata:0x50000000 -qalias=nostd -qalias_size=200000000
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

Benchmarks using both Fortran and C:

-bmaxdata:0x50000000 -qalias=nostd -qalias_size=200000000
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 14.1

Bull Escala PL450R+ (2100 MHz, 1 CPU)

SPECfp_base2006 = 12.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Peak Optimization Flags (Continued)

433.milc: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qalign=natural -qipa=noobject
-blpdata -qipa=threads

470.lbm: -qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qipa=noobject -blpdata -qipa=threads

482.sphinx3: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -qipa=noobject -blpdata -qipa=threads

447.dealII: -O5 -qlargepage -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -qipa=noobject -blpdata -qipa=threads

450.soplex: -O4 -qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -q64 -qalign=natural -lmass -qipa=noobject
-blpdata -qipa=threads

Fortran benchmarks:

410.bwaves: -O5 -qlargepage -qsmallstack=dynlenonheap -qipa=noobject
-blpdata -qipa=threads

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qessl
-lessl -qipa=noobject -blpdata -qipa=threads

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-qipa=noobject -blpdata -qipa=threads

437.leslie3d: -O5 -qlargepage -qipa=noobject -blpdata -qipa=threads

459.GemsFDTD: Same as 437.leslie3d

465.tonto: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -lmass
-qipa=noobject -blpdata -qipa=threads

Benchmarks using both Fortran and C:

435.gromacs: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -D_ILS_MACROS -qipa=noobject -blpdata
-qipa=threads

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 14.1

Bull Escala PL450R+ (2100 MHz, 1 CPU)

SPECfp_base2006 = 12.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Peak Optimization Flags (Continued)

436.cactusADM: -qlanglvl=extc99 -O5 -qlargepage -D_ILS_MACROS
-qipa=noobject -blpdata -qipa=threads

454.calculix: Same as 435.gromacs

481.wrf: -qlanglvl=extc99 -O5 -qlargepage -lmass
-qsmallstack=dynlenonheap -D_ILS_MACROS -qipa=noobject
-blpdata -qipa=threads

Peak Other Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -qsuppress=1500-036

470.lbm: -bmaxdata:0x30000000 -qsuppress=1500-036

482.sphinx3: -qfdpr -qsuppress=1500-036

C++ benchmarks:

444.namd: -qfdpr -qsuppress=1500-036

447.dealII: -bmaxdata:0x50000000 -qsuppress=1500-036

450.soplex: -bmaxdata:0x40000000 -qfdpr -qsuppress=1500-036

453.povray: -qsuppress=1500-036

Fortran benchmarks (except as noted below):

-bmaxdata:0x50000000 -qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

416.gamess: -bmaxdata:0x40000000 -qalias=nostd
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

434.zeusmp: -bmaxdata:0x40000000 -qfdpr -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

437.leslie3d: -qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

465.tonto: -bmaxdata:0x20000000 -qalias=nostd
-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

Benchmarks using both Fortran and C (except as noted below):

-qsuppress=cmpmsg:1500-010 -qsuppress=1500-036

436.cactusADM: -bmaxdata:0x50000000 -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp2006 = 14.1

Bull Escala PL450R+ (2100 MHz, 1 CPU)

SPECfp_base2006 = 12.2

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jan-2007

Hardware Availability: Feb-2006

Software Availability: Dec-2006

Peak Other Flags (Continued)

481.wrf: -bmaxdata:0x30000000 -qsuppress=cmpmsg:1500-010
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.15.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.15.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 10:51:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 21 February 2007.