



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECfp®\_rate2006 = 91.3**

ProLiant DL585 G2 (AMD Opteron 8220 SE)

**SPECfp\_rate\_base2006 = 86.1**

CPU2006 license: 3


Test date: Mar-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

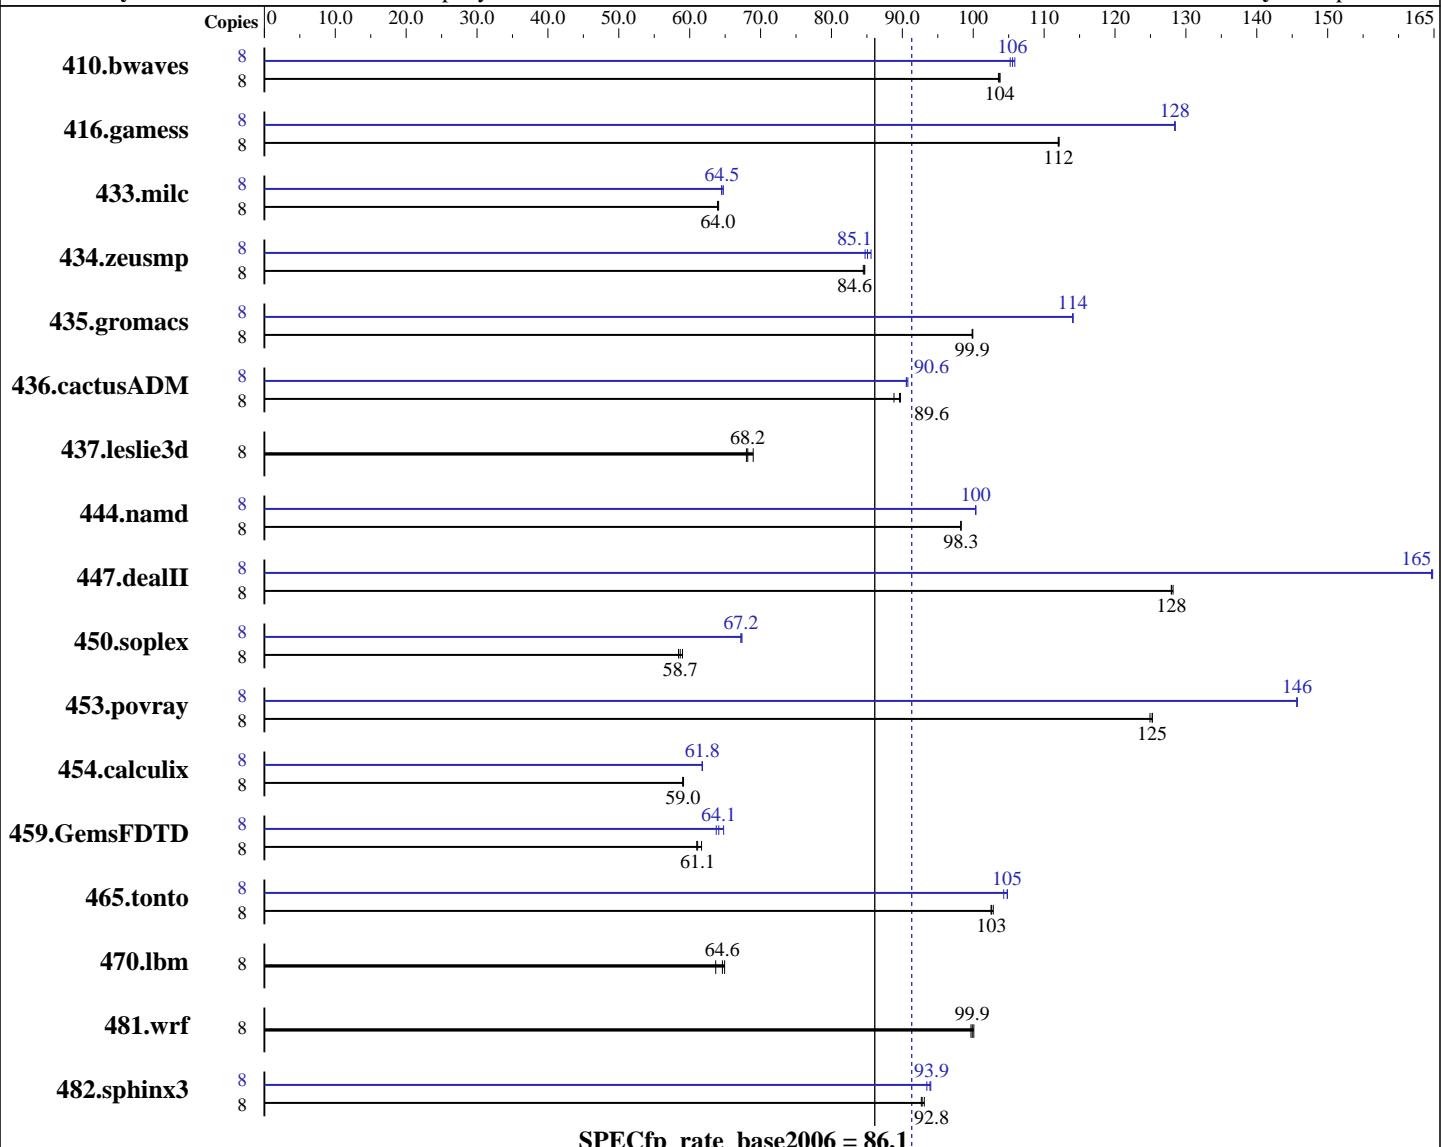

## Hardware

CPU Name: AMD Opteron 8220 SE  
 CPU Characteristics:  
 CPU MHz:  
 FPU:  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

## Software

Operating System: SuSE Linux Enterprise Server 9 (x86-64) SP3  
 Compiler: QLogic PathScale Compiler Suite, Release 2.5  
 Auto Parallel: No  
 File System: ext2  
 System State: Multi-user run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECfp\_rate2006 = 91.3**

ProLiant DL585 G2 (AMD Opteron 8220 SE)

**SPECfp\_rate\_base2006 = 86.1**

CPU2006 license: 3

Test date: Mar-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

L3 Cache: None  
Other Cache: None  
Memory: 32 GB (16x2 GB, PC2-5300P CL5)  
Disk Subsystem: 2x72 GB 10 K SAS  
Other Hardware: None

Other Software: SmartHeap 8.0 32 bit Library for Linux

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1048	104	<b>1048</b>	<b>104</b>	1050	104	8	1033	105	1027	106	<b>1030</b>	<b>106</b>
416.gamess	8	<b>1398</b>	<b>112</b>	1399	112	1397	112	8	1219	128	1220	128	<b>1219</b>	<b>128</b>
433.milc	8	<b>1148</b>	<b>64.0</b>	1149	63.9	1146	64.1	8	<b>1138</b>	<b>64.5</b>	1139	64.5	1134	64.7
434.zeusmp	8	860	84.7	<b>860</b>	<b>84.6</b>	862	84.5	8	<b>856</b>	<b>85.1</b>	851	85.6	859	84.7
435.gromacs	8	<b>572</b>	<b>99.9</b>	572	99.9	572	99.9	8	501	114	<b>501</b>	<b>114</b>	501	114
436.cactusADM	8	1076	88.8	<b>1067</b>	<b>89.6</b>	1065	89.7	8	1053	90.8	<b>1055</b>	<b>90.6</b>	1056	90.6
437.leslie3d	8	<b>1103</b>	<b>68.2</b>	1090	69.0	1106	68.0	8	<b>1103</b>	<b>68.2</b>	1090	69.0	1106	68.0
444.namd	8	653	98.3	653	98.3	<b>653</b>	<b>98.3</b>	8	639	100	639	100	<b>639</b>	<b>100</b>
447.dealII	8	715	128	714	128	<b>715</b>	<b>128</b>	8	<b>556</b>	<b>165</b>	556	165	555	165
450.soplex	8	<b>1137</b>	<b>58.7</b>	1131	59.0	1142	58.4	8	990	67.4	992	67.2	<b>992</b>	<b>67.2</b>
453.povray	8	340	125	341	125	<b>340</b>	<b>125</b>	8	292	146	<b>292</b>	<b>146</b>	292	146
454.calculix	8	1116	59.1	<b>1118</b>	<b>59.0</b>	1118	59.0	8	1068	61.8	1068	61.8	<b>1068</b>	<b>61.8</b>
459.GemsFDTD	8	1376	61.7	1392	61.0	<b>1389</b>	<b>61.1</b>	8	<b>1324</b>	<b>64.1</b>	1332	63.7	1310	64.8
465.tonto	8	768	103	<b>767</b>	<b>103</b>	766	103	8	755	104	<b>751</b>	<b>105</b>	751	105
470.lbm	8	1726	63.7	<b>1701</b>	<b>64.6</b>	1693	64.9	8	1726	63.7	<b>1701</b>	<b>64.6</b>	1693	64.9
481.wrf	8	893	100	<b>895</b>	<b>99.9</b>	896	99.7	8	893	100	<b>895</b>	<b>99.9</b>	896	99.7
482.sphinx3	8	1675	93.1	1682	92.7	<b>1680</b>	<b>92.8</b>	8	1659	94.0	<b>1661</b>	<b>93.9</b>	1668	93.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Node interleaving is disabled

## General Notes

taskset utility used to bind CPU(s) to processes  
Binaries supplied by AMD

## Base Compiler Invocation

C benchmarks:  
pathcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECfp\_rate2006 = 91.3**

ProLiant DL585 G2 (AMD Opteron 8220 SE)

**SPECfp\_rate\_base2006 = 86.1**

CPU2006 license: 3

**Test date:** Mar-2007

Test sponsor: Hewlett-Packard Company

**Hardware Availability:** Sep-2006

Tested by: Hewlett-Packard Company

**Software Availability:** Sep-2006

## Base Compiler Invocation (Continued)

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64 -DSPEC_CPU_TABLE_WORKAROUND
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast

Fortran benchmarks:  
-Ofast

Benchmarks using both Fortran and C:  
-Ofast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECfp\_rate2006 = 91.3**

ProLiant DL585 G2 (AMD Opteron 8220 SE)

**SPECfp\_rate\_base2006 = 86.1**

CPU2006 license: 3

**Test date:** Mar-2007

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2006

**Tested by:** Hewlett-Packard Company

**Software Availability:** Sep-2006

## Base Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

Fortran benchmarks:

-IPA:max\_jobs=2

Benchmarks using both Fortran and C:

-IPA:max\_jobs=2

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_TABLE\_WORKAROUND  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company	<b>SPECfp_rate2006 = 91.3</b>
ProLiant DL585 G2 (AMD Opteron 8220 SE)	<b>SPECfp_rate_base2006 = 86.1</b>
<b>CPU2006 license:</b> 3	<b>Test date:</b> Mar-2007
<b>Test sponsor:</b> Hewlett-Packard Company	<b>Hardware Availability:</b> Sep-2006
<b>Tested by:</b> Hewlett-Packard Company	<b>Software Availability:</b> Sep-2006

## Peak Optimization Flags

C benchmarks:

```
433.milc: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast  
470.lbm: basepeak = yes  
482.sphinx3: Same as 433.milc
```

C++ benchmarks:

```
444.namd: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast  
447.dealII: -Ofast -m32 -fno-exceptions  
450.soplex: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -m32 -O3  
           -OPT:IEEE_arith=3 -CG:load_exe=0 -CG:movnti=1  
           -LNO:minvariant=off -fno-exceptions  
453.povray: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -Ofast  
           -fno-fast-math
```

Fortran benchmarks:

```
410.bwaves: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3  
           -OPT:Ofast -OPT:IEEE_arith=3 -LNO:blocking=off  
           -LNO:ignore_feedback=off  
416.gamess: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O2  
           -OPT:Ofast -OPT:ro=3 -OPT:unroll_size=256  
434.zeusmp: -Ofast -CG:local_fwd_sched=on -LNO:blocking=off  
           -LNO:interchange=off -LNO:fu=10 -LNO:full_unroll_outer=on  
437.leslie3d: basepeak = yes  
459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0  
465.tonto: -Ofast -CG:local_fwd_sched=on -IPA:plimit=525
```

Benchmarks using both Fortran and C:

```
435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3  
436.cactusADM: -fb_create fbdata(pass 1) -fb_opt fbdata(pass 2) -O3  
                -LNO:prefetch_ahead=5 -LNO:ou_prod_max=10 -LNO:full_unroll=5  
                -ipa  
454.calculix: -Ofast -CG:prefetch=off -LNO:simd=0 -OPT:unroll_times_max=8  
                -WOPT:mem_opnds=on
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

**SPECfp\_rate2006 = 91.3**

ProLiant DL585 G2 (AMD Opteron 8220 SE)

**SPECfp\_rate\_base2006 = 86.1**

CPU2006 license: 3

Test date: Mar-2007

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2006

Tested by: Hewlett-Packard Company

Software Availability: Sep-2006

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

Fortran benchmarks:

-IPA:max\_jobs=2

Benchmarks using both Fortran and C:

-IPA:max\_jobs=2

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.21.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.21.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.21.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.21.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 10:46:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 March 2007.