



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

### SPECfp<sup>®</sup>\_rate2006 = 18.6

PRIMERGY RX330 S1, AMD Opteron 2210, 1.8 GHz

### SPECfp\_rate\_base2006 = 17.6

CPU2006 license: 22


Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: May-2007

Software Availability: Mar-2007

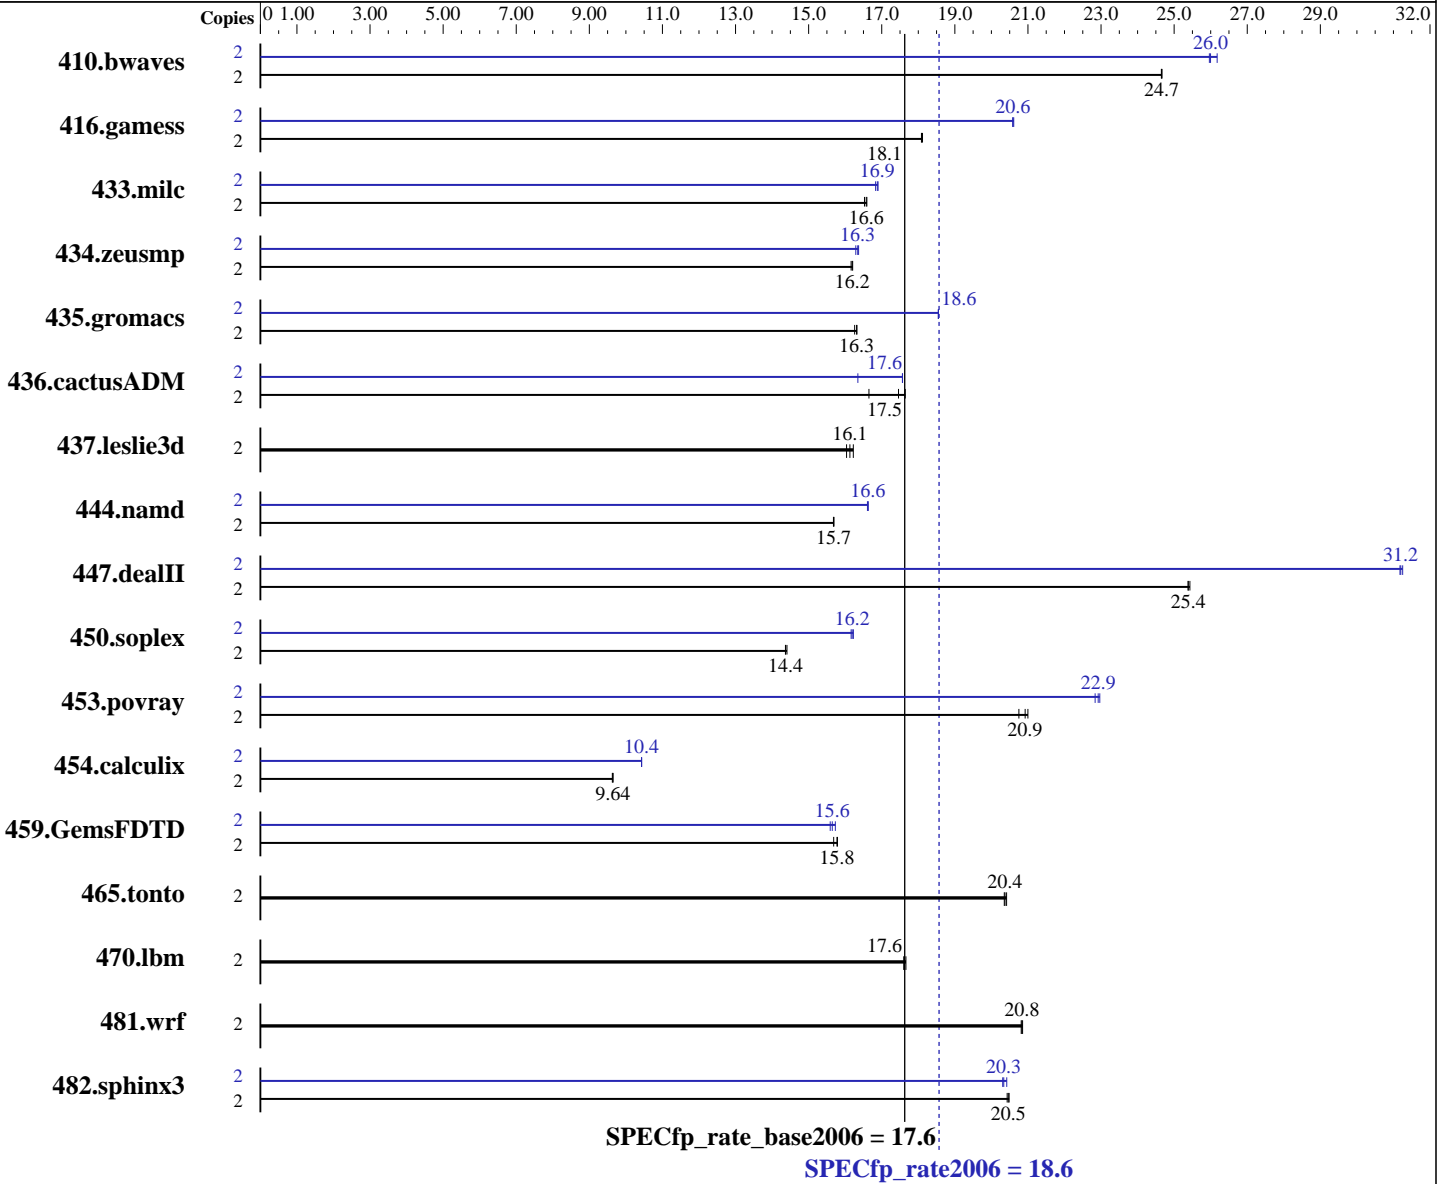

### Hardware

CPU Name: AMD Opteron 2210  
 CPU Characteristics: 2210  
 CPU MHz: 1800  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

### Software

Operating System: SLES 10 for AMD64/EM64T  
 Compiler: QLogic PathScale Compiler Suite, - Release 3.0  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Multi-user run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

## Fujitsu Siemens Computers

SPECfp\_rate2006 = **18.6**

PRIMERGY RX330 S1, AMD Opteron 2210, 1.8 GHz

SPECfp\_rate\_base2006 = 17.6

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 32 GB (8x4 GB DDR2 PC2-5300P, 2 rank, CAS 5-5-5, with ECC)  
 Disk Subsystem: SAS (36GB 15.4 krpm)  
 Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	2	<b>1102</b>	<b>24.7</b>	1102	24.7	1103	24.7	2	1038	26.2	1047	26.0	<b>1046</b>	<b>26.0</b>		
416.gamess	2	<b>2164</b>	<b>18.1</b>	2165	18.1	2162	18.1	2	<b>1902</b>	<b>20.6</b>	1902	20.6	1900	20.6		
433.milc	2	1111	16.5	<b>1108</b>	<b>16.6</b>	1107	16.6	2	1091	16.8	<b>1088</b>	<b>16.9</b>	1086	16.9		
434.zeusmp	2	1123	16.2	1126	16.2	<b>1124</b>	<b>16.2</b>	2	1112	16.4	<b>1114</b>	<b>16.3</b>	1117	16.3		
435.gromacs	2	878	16.3	875	16.3	<b>875</b>	<b>16.3</b>	2	770	18.5	770	18.6	<b>770</b>	<b>18.6</b>		
436.cactusADM	2	1435	16.6	1355	17.6	<b>1369</b>	<b>17.5</b>	2	<b>1361</b>	<b>17.6</b>	1360	17.6	1462	16.3		
437.leslie3d	2	<b>1166</b>	<b>16.1</b>	1172	16.0	1159	16.2	2	<b>1166</b>	<b>16.1</b>	1172	16.0	1159	16.2		
444.namd	2	1023	15.7	1022	15.7	<b>1023</b>	<b>15.7</b>	2	966	16.6	<b>965</b>	<b>16.6</b>	965	16.6		
447.dealII	2	900	25.4	<b>901</b>	<b>25.4</b>	901	25.4	2	734	31.2	<b>733</b>	<b>31.2</b>	732	31.3		
450.soplex	2	1161	14.4	<b>1161</b>	<b>14.4</b>	1158	14.4	2	1028	16.2	1032	16.2	<b>1030</b>	<b>16.2</b>		
453.povray	2	513	20.8	<b>509</b>	<b>20.9</b>	507	21.0	2	463	23.0	466	22.8	<b>464</b>	<b>22.9</b>		
454.calculix	2	1710	9.65	1714	9.63	<b>1711</b>	<b>9.64</b>	2	<b>1582</b>	<b>10.4</b>	1582	10.4	1582	10.4		
459.GemsFDTD	2	1353	15.7	1344	15.8	<b>1345</b>	<b>15.8</b>	2	1361	15.6	<b>1356</b>	<b>15.6</b>	1349	15.7		
465.tonto	2	967	20.4	964	20.4	<b>966</b>	<b>20.4</b>	2	967	20.4	964	20.4	<b>966</b>	<b>20.4</b>		
470.lbm	2	<b>1560</b>	<b>17.6</b>	1556	17.7	1561	17.6	2	<b>1560</b>	<b>17.6</b>	1556	17.7	1561	17.6		
481.wrf	2	1071	20.9	<b>1072</b>	<b>20.8</b>	1073	20.8	2	1071	20.9	<b>1072</b>	<b>20.8</b>	1073	20.8		
482.sphinx3	2	<b>1905</b>	<b>20.5</b>	1903	20.5	1908	20.4	2	1909	20.4	<b>1917</b>	<b>20.3</b>	1919	20.3		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' has been used to bind processes to CPUs

## General Notes

BIOS settings:  
Node Interleave = disabled

For information about Fujitsu Siemens Computers in your country please see:  
<http://www.fujitsu-siemens.com/countries>



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 18.6

PRIMERGY RX330 S1, AMD Opteron 2210, 1.8 GHz

SPECfp\_rate\_base2006 = 17.6

CPU2006 license: 22

Test date: Apr-2007

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: May-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Mar-2007

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64  
436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-Ofast

C++ benchmarks:  
-Ofast

Fortran benchmarks:  
-Ofast -OPT:malloc\_alg=1

Benchmarks using both Fortran and C:  
-Ofast -OPT:malloc\_alg=1



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECfp\_rate2006 = 18.6**

PRIMERGY RX330 S1, AMD Opteron 2210, 1.8 GHz

**SPECfp\_rate\_base2006 = 17.6**

**CPU2006 license:** 22

**Test date:** Apr-2007

**Test sponsor:** Fujitsu Siemens Computers

**Hardware Availability:** May-2007

**Tested by:** Fujitsu Siemens Computers

**Software Availability:** Mar-2007

## Base Other Flags

C benchmarks:  
-IPA:max\_jobs=4

C++ benchmarks:  
-IPA:max\_jobs=4

Fortran benchmarks:  
-IPA:max\_jobs=4

Benchmarks using both Fortran and C:  
-IPA:max\_jobs=4

## Peak Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Fujitsu Siemens Computers**

**SPECfp\_rate2006 = 18.6**

PRIMERGY RX330 S1, AMD Opteron 2210, 1.8 GHz

**SPECfp\_rate\_base2006 = 17.6**

**CPU2006 license:** 22

**Test date:** Apr-2007

**Test sponsor:** Fujitsu Siemens Computers

**Hardware Availability:** May-2007

**Tested by:** Fujitsu Siemens Computers

**Software Availability:** Mar-2007

## Peak Optimization Flags

### C benchmarks:

433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc\_alg=1

470.lbm: basepeak = yes

482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -WOPT:aggstr=0 -m32

### C++ benchmarks:

444.namd: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-exceptions

447.deallI: -Ofast -static -INLINE:aggressive=on -OPT:malloc\_alg=1  
-m32 -fno-exceptions

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:IEEE\_arith=3 -CG:load\_exe=0 -CG:movnti=1  
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-fast-math

### Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -OPT:IEEE\_arith=3 -LNO:blocking=off  
-LNO:ignore\_feedback=off

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O2  
-OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

434.zeusmp: -Ofast -CG:local\_fwd\_sched=on -LNO:blocking=off  
-LNO:interchange=off -LNO:fu=10 -LNO:full\_unroll\_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

### Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5 -LNO:ou\_prod\_max=10  
-LNO:full\_unroll=5 -ipa

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECfp\_rate2006 = 18.6

PRIMERGY RX330 S1, AMD Opteron 2210, 1.8 GHz

SPECfp\_rate\_base2006 = 17.6

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Apr-2007

Hardware Availability: May-2007

Software Availability: Mar-2007

## Peak Optimization Flags (Continued)

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem\_opnds=on

481.wrf: basepeak = yes

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=4

C++ benchmarks:

-IPA:max\_jobs=4

Fortran benchmarks:

-IPA:max\_jobs=4

Benchmarks using both Fortran and C:

-IPA:max\_jobs=4

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.10.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.10.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.10.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.10.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Sep 13 11:18:59 2016 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 May 2007.