



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp<sup>®</sup>\_rate2006 = 89.1

n4250QE (S4985) AMD Opteron 8222 SE

SPECfp\_rate\_base2006 = 83.1

CPU2006 license: 49


Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2007

Hardware Availability: May-2007

Software Availability: Feb-2007

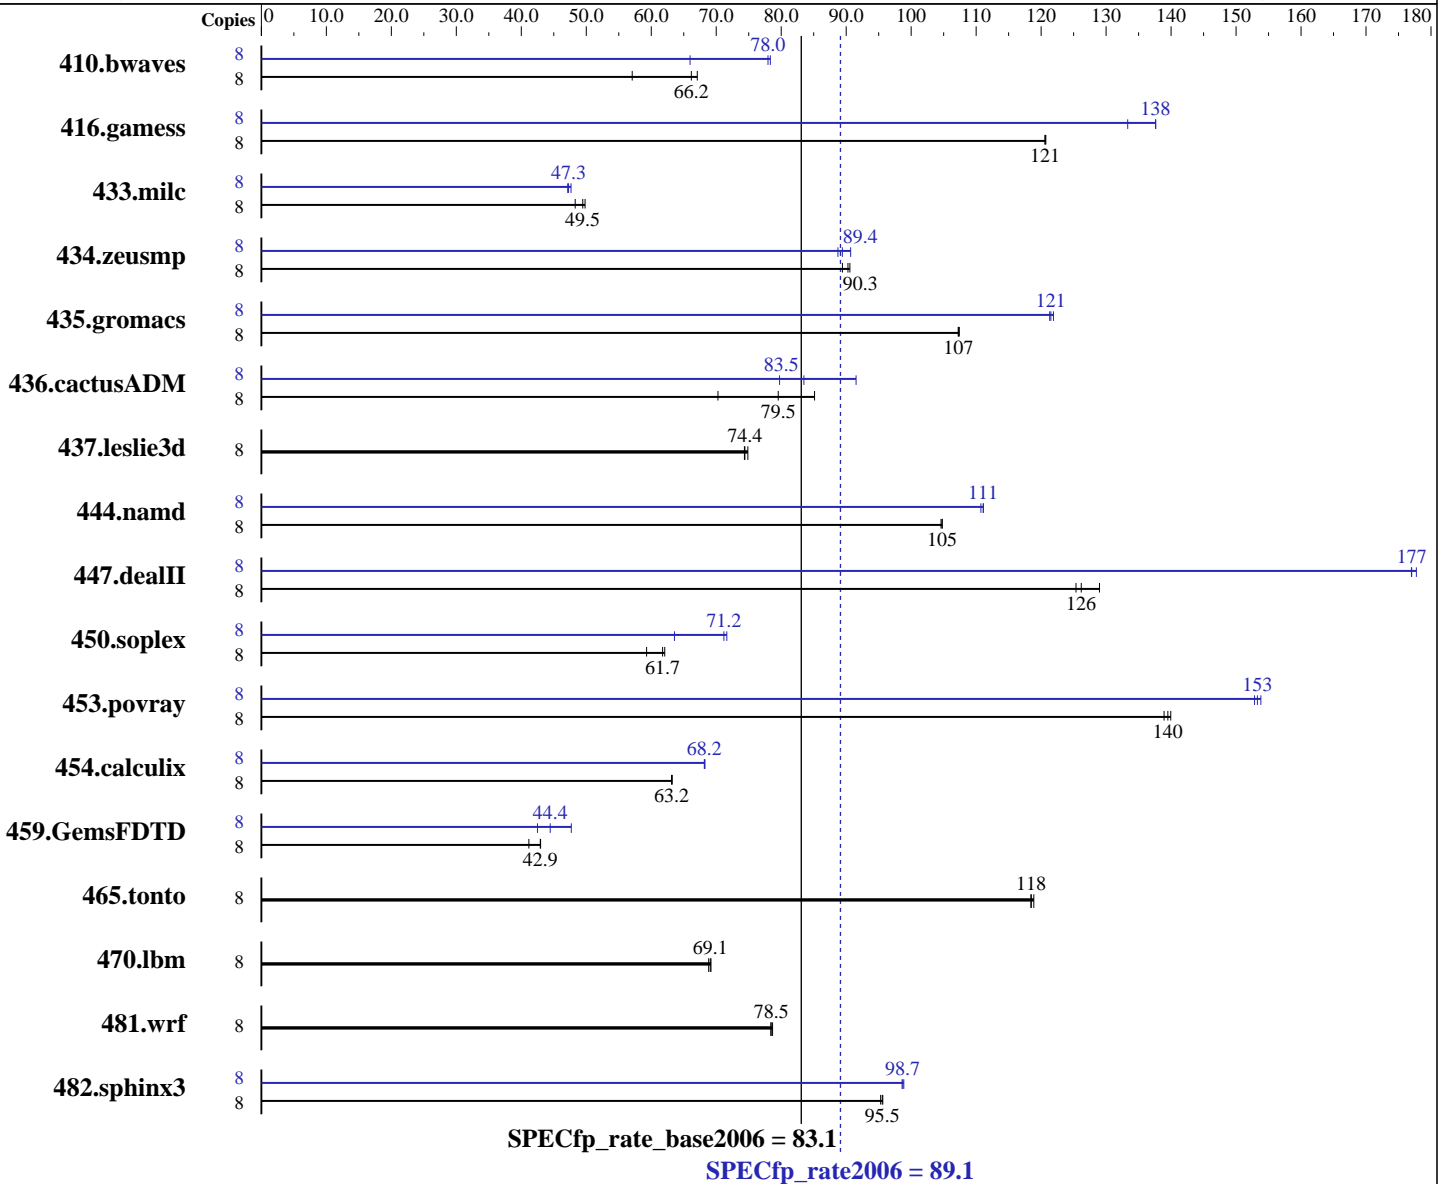

## Hardware

CPU Name: AMD Opteron 8222 SE  
 CPU Characteristics:  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 4 chips, 2 cores/chip  
 CPU(s) orderable: 1,2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 1 MB I+D on chip per core

Continued on next page

## Software

Operating System: SuSE Linux Enterprise Server 10 64-bit kernel  
 Compiler: QLogic PathScale  
 Compiler Suite, Release 3.0  
 Auto Parallel: No  
 File System: ext3  
 System State: Multi-user, run level 3  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Tyan

(Test Sponsor: Advanced Micro Devices)

SPECfp\_rate2006 = 89.1

n4250QE (S4985) AMD Opteron 8222 SE

SPECfp\_rate\_base2006 = 83.1

CPU2006 license: 49

Test sponsor: Advanced Micro Devices

Tested by: Advanced Micro Devices

Test date: Mar-2007

Hardware Availability: May-2007

Software Availability: Feb-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (16x1GB, DDR2-667 CL5 ECC Reg Dual Rank)  
Disk Subsystem: SATA, 250 GB  
Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1905	57.1	1621	67.1	<b>1643</b>	<b>66.2</b>	8	1648	66.0	<b>1394</b>	<b>78.0</b>	1388	78.3
416.gamess	8	<b>1298</b>	<b>121</b>	1298	121	1299	121	8	<b>1138</b>	<b>138</b>	1138	138	1175	133
433.milc	8	1521	48.3	1474	49.8	<b>1485</b>	<b>49.5</b>	8	1558	47.1	<b>1554</b>	<b>47.3</b>	1541	47.7
434.zeusmp	8	814	89.4	<b>806</b>	<b>90.3</b>	804	90.6	8	803	90.7	<b>814</b>	<b>89.4</b>	820	88.7
435.gromacs	8	<b>533</b>	<b>107</b>	533	107	532	107	8	471	121	<b>470</b>	<b>121</b>	469	122
436.cactusADM	8	1361	70.3	1123	85.1	<b>1202</b>	<b>79.5</b>	8	<b>1145</b>	<b>83.5</b>	1199	79.7	1045	91.5
437.leslie3d	8	1004	74.9	1012	74.3	<b>1011</b>	<b>74.4</b>	8	1004	74.9	1012	74.3	<b>1011</b>	<b>74.4</b>
444.namd	8	613	105	<b>612</b>	<b>105</b>	612	105	8	579	111	577	111	<b>578</b>	<b>111</b>
447.dealII	8	710	129	730	125	<b>725</b>	<b>126</b>	8	515	178	517	177	<b>517</b>	<b>177</b>
450.soplex	8	1125	59.3	<b>1081</b>	<b>61.7</b>	1075	62.1	8	1049	63.6	<b>937</b>	<b>71.2</b>	931	71.6
453.povray	8	304	140	306	139	<b>305</b>	<b>140</b>	8	277	154	<b>278</b>	<b>153</b>	278	153
454.calculix	8	1044	63.2	1046	63.1	<b>1045</b>	<b>63.2</b>	8	967	68.3	968	68.2	<b>968</b>	<b>68.2</b>
459.GemsFDTD	8	2062	41.2	<b>1978</b>	<b>42.9</b>	1975	43.0	8	<b>1910</b>	<b>44.4</b>	1998	42.5	1780	47.7
465.tonto	8	<b>664</b>	<b>118</b>	662	119	665	118	8	<b>664</b>	<b>118</b>	662	119	665	118
470.lbm	8	<b>1591</b>	<b>69.1</b>	1589	69.2	1597	68.8	8	<b>1591</b>	<b>69.1</b>	1589	69.2	1597	68.8
481.wrf	8	1136	78.7	1140	78.4	<b>1139</b>	<b>78.5</b>	8	1136	78.7	1140	78.4	<b>1139</b>	<b>78.5</b>
482.sphinx3	8	<b>1632</b>	<b>95.5</b>	1636	95.3	1630	95.6	8	1581	98.6	1577	98.9	<b>1579</b>	<b>98.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind cores to processes  
All memory slots filled on all used CPU sockets

The tested system can be assembled using an SSI-MEB case and  
a Silverstone Zeus 650 watt ST65ZF ATX 12V Power Supply.

## Base Compiler Invocation

C benchmarks:  
pathcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 89.1**

**n4250QE (S4985) AMD Opteron 8222 SE**

**SPECfp\_rate\_base2006 = 83.1**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

## Base Compiler Invocation (Continued)

C++ benchmarks:

pathCC

Fortran benchmarks:

pathf95

Benchmarks using both Fortran and C:

pathcc pathf95

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64  
 436.cactusADM: -DSPEC\_CPU\_LP64 -fno-second-underscore  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX -fno-second-underscore  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-Ofast

C++ benchmarks:

-Ofast

Fortran benchmarks:

-Ofast -OPT:malloc\_alg=1

Benchmarks using both Fortran and C:

-Ofast -OPT:malloc\_alg=1



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 89.1**

**n4250QE (S4985) AMD Opteron 8222 SE**

**SPECfp\_rate\_base2006 = 83.1**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

## Peak Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

Fortran benchmarks:  
pathf95

Benchmarks using both Fortran and C:  
pathcc pathf95

## Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

433.milc: -Ofast -CG:cflow=off -LNO:prefetch=1 -OPT:malloc\_alg=1

470.lbm: basepeak = yes

482.sphinx3: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -WOPT:aggstr=0 -m32

C++ benchmarks:

444.namd: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-exceptions

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 89.1**

**n4250QE (S4985) AMD Opteron 8222 SE**

**SPECfp\_rate\_base2006 = 83.1**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

## Peak Optimization Flags (Continued)

447.dealIII: -Ofast -INLINE:aggressive=on -OPT:malloc\_alg=1 -m32  
-fno-exceptions

450.soplex: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:IEEE\_arith=3 -CG:load\_exe=0 -CG:movnti=1  
-LNO:minvariant=off -LNO:prefetch=1 -fno-exceptions

453.povray: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-fno-fast-math

### Fortran benchmarks:

410.bwaves: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:Ofast -OPT:IEEE\_arith=3 -LNO:blocking=off  
-LNO:ignore\_feedback=off

416.gamess: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O2  
-OPT:Ofast -OPT:ro=3 -OPT:unroll\_size=256

434.zeusmp: -Ofast -CG:local\_fwd\_sched=on -LNO:blocking=off  
-LNO:interchange=off -LNO:fu=10 -LNO:full\_unroll\_outer=on

437.leslie3d: basepeak = yes

459.GemsFDTD: -Ofast -LNO:fission=2 -LNO:prefetch=0

465.tonto: basepeak = yes

### Benchmarks using both Fortran and C:

435.gromacs: -O3 -OPT:rsqrt=2 -OPT:ro=3

436.cactusADM: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-LNO:prefetch=3 -LNO:prefetch\_ahead=5 -LNO:ou\_prod\_max=10  
-LNO:full\_unroll=5 -ipa

454.calculix: -Ofast -LNO:simd=0 -WOPT:mem\_opnds=on

481.wrf: basepeak = yes

## Peak Other Flags

### C++ benchmarks:

447.dealIII: -static



# SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

**Tyan**

(Test Sponsor: Advanced Micro Devices)

**SPECfp\_rate2006 = 89.1**

**n4250QE (S4985) AMD Opteron 8222 SE**

**SPECfp\_rate\_base2006 = 83.1**

**CPU2006 license:** 49

**Test sponsor:** Advanced Micro Devices

**Tested by:** Advanced Micro Devices

**Test date:** Mar-2007

**Hardware Availability:** May-2007

**Software Availability:** Feb-2007

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Sep 13 11:19:13 2016 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 May 2007.