



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 58.0

IBM System p 570 (4.7 GHz, 2 core)

SPECfp_rate_base2006 = 51.5

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2007

Hardware Availability: Jun-2007

Software Availability: Jun-2007

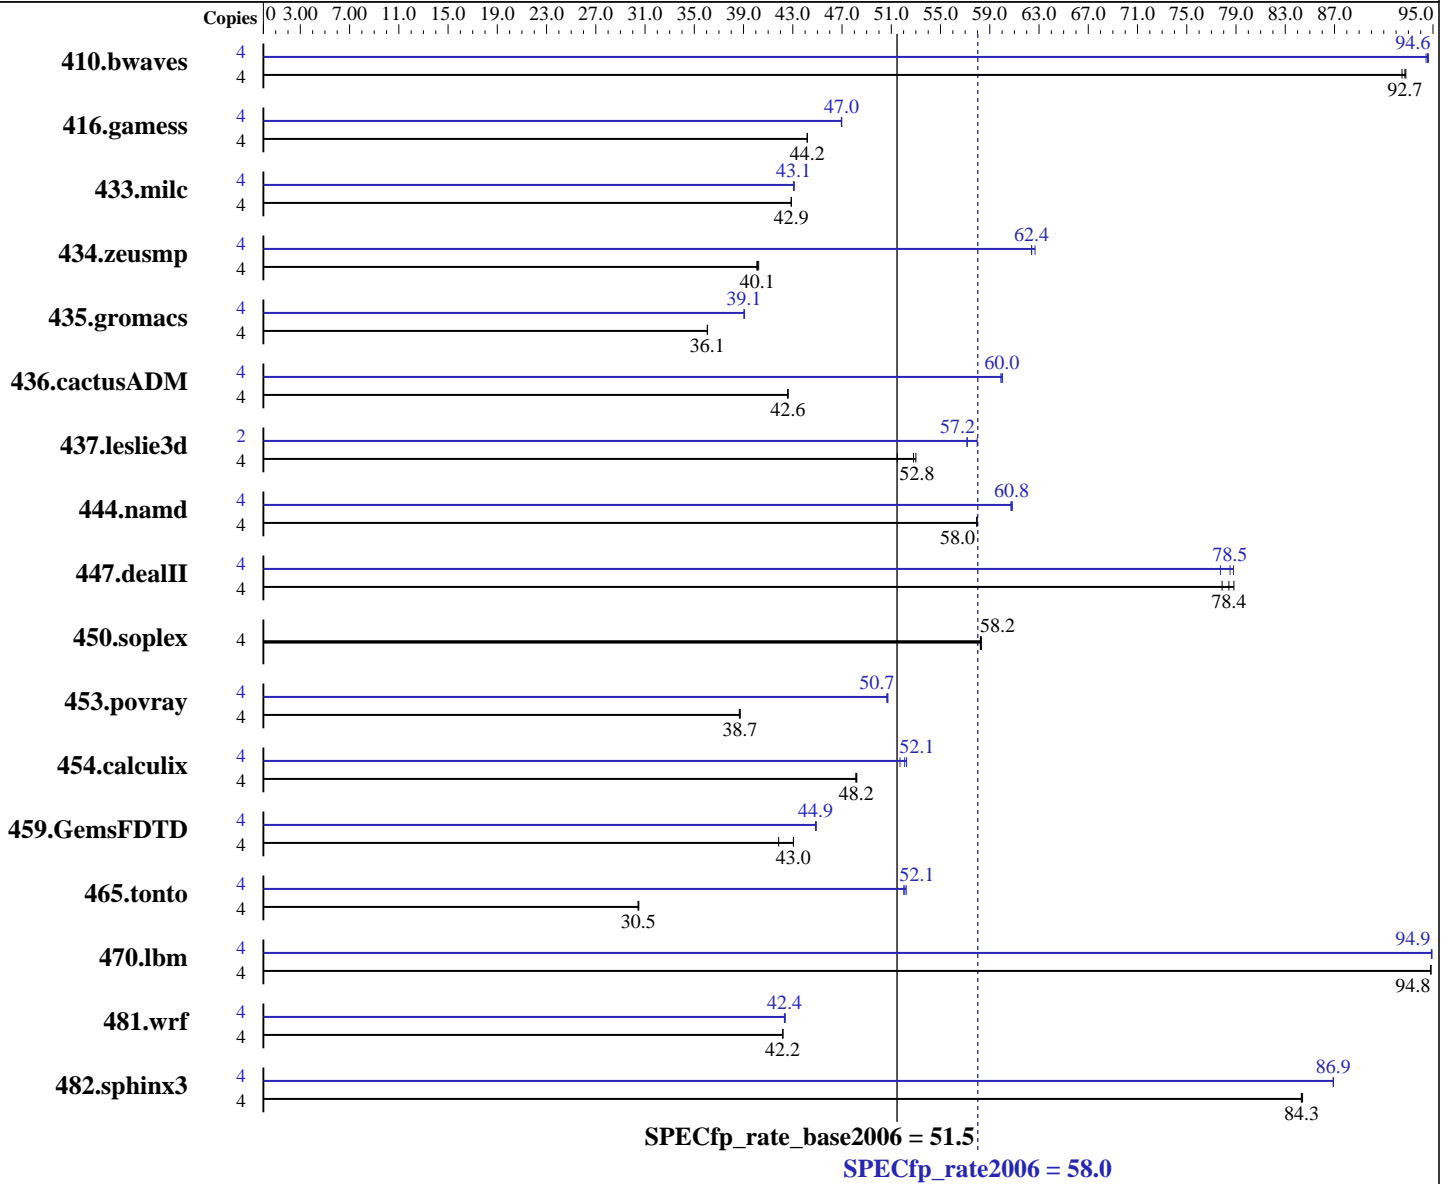

Hardware

CPU Name: POWER6
 CPU Characteristics:
 CPU MHz: 4700
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 2,4,8,12,16 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core

Continued on next page

Software

Operating System: IBM AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 9.0 for AIX
 XL Fortran Enterprise Edition Version 11.1 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: --



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 58.0

IBM System p 570 (4.7 GHz, 2 core)

SPECfp_rate_base2006 = 51.5

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

L3 Cache: 32 MB I+D off chip per chip
 Other Cache: None
 Memory: 16 GB (8x2 GB) DDR2 667 MHz
 Disk Subsystem: 1x73 GB 1x146 GB SAS 15K RPM
 Other Hardware: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	586	92.7	588	92.5	586	92.8	4	574	94.6	576	94.4	575	94.6
416.gamess	4	1773	44.2	1773	44.2	1773	44.2	4	1667	47.0	1668	47.0	1668	46.9
433.milc	4	856	42.9	856	42.9	857	42.9	4	852	43.1	852	43.1	852	43.1
434.zeusmp	4	907	40.1	905	40.2	908	40.1	4	583	62.4	581	62.7	583	62.4
435.gromacs	4	792	36.1	792	36.1	792	36.1	4	731	39.1	731	39.1	731	39.0
436.cactusADM	4	1122	42.6	1122	42.6	1122	42.6	4	796	60.0	798	59.9	797	60.0
437.leslie3d	4	730	51.5	709	53.0	712	52.8	2	324	58.0	329	57.2	329	57.1
444.namd	4	554	57.9	554	58.0	553	58.0	4	528	60.7	528	60.8	527	60.8
447.dealII	4	580	78.8	588	77.9	584	78.4	4	589	77.7	581	78.8	583	78.5
450.soplex	4	572	58.3	573	58.2	573	58.2	4	572	58.3	573	58.2	573	58.2
453.povray	4	550	38.7	550	38.7	550	38.7	4	420	50.6	420	50.7	420	50.7
454.calculix	4	685	48.2	686	48.1	685	48.2	4	632	52.2	638	51.7	634	52.1
459.GemsFDTD	4	986	43.0	1014	41.9	986	43.1	4	945	44.9	946	44.8	946	44.9
465.tonto	4	1292	30.5	1293	30.4	1291	30.5	4	757	52.0	754	52.2	755	52.1
470.lbm	4	580	94.8	580	94.8	580	94.8	4	579	94.9	579	94.9	579	94.9
481.wrf	4	1059	42.2	1059	42.2	1059	42.2	4	1055	42.4	1056	42.3	1054	42.4
482.sphinx3	4	924	84.3	925	84.3	924	84.4	4	897	86.9	897	86.9	897	86.9

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

AIX 5L V5.3 updated with the 5300-06 Technology Level.

See flags file for details on following settings.

all ulimits set to unlimited

Environment variables set before executing benchmarks:

MALLOCOPTIONS=pool

MEMORY_AFFINITY=MCM

XLFRTEOPTS=intrinths=1

System set to "Enhanced" mode when defining partition on HMC

768 pages of size 16M defined on systems with vmo command

fdpr binary optimization tool used for peak versions of

410.bwaves 434.zeusmp 453.povray 470.lbm 482.sphinx3

submit used to bind benchmark to a processor using "bindprocessor"



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 58.0

IBM System p 570 (4.7 GHz, 2 core)

SPECfp_rate_base2006 = 51.5

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed

416.gamess: -qfixed

434.zeusmp: -qfixed

435.gromacs: -qfixed -qextname

436.cactusADM: -qfixed -qextname

437.leslie3d: -qfixed

454.calculix: -qfixed -qextname

481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE

482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all

-D__IBM_FAST_VECTOR -blpdata

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap

-qalias=nostd -blpdata

Benchmarks using both Fortran and C:

-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS

-qsmallstack=dynlenonheap -qalias=nostd -blpdata



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 58.0

IBM System p 570 (4.7 GHz, 2 core)

SPECfp_rate_base2006 = 51.5

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 58.0

IBM System p 570 (4.7 GHz, 2 core)

SPECfp_rate_base2006 = 51.5

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: May-2007

Hardware Availability: Jun-2007

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -blpdata

470.lbm: -O5 -qlargepage -D_ILS_MACROS -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

447.dealIII: -bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS
-qrtti=all -D__IBM_FAST_VECTOR -blpdata

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -qalign=natural -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnv1
-qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qenablevmx -qvecnv1 -qxlf90=nosignedzero
-blpdata

437.leslie3d: -O5 -qlargepage -q64 -blpdata

459.GemsFDTD: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qenablevmx -qvecnv1 -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx
-qvecnv1 -D_ILS_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -D_ILS_MACROS -blpdata

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -blpdata

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 58.0

IBM System p 570 (4.7 GHz, 2 core)

SPECfp_rate_base2006 = 51.5

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

Peak Optimization Flags (Continued)

481.wrf: -bmaxdata:0x30000000 -05 -qlargepage -D_ILS_MACROS
-qalias=nostd -blpdata

Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 11:11:45 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 12 June 2007.