



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp®\_rate2006 = 115**

**IBM System p 570 (4.7 GHz, 4 core)**

**SPECfp\_rate\_base2006 = 102**

CPU2006 license: 11


Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

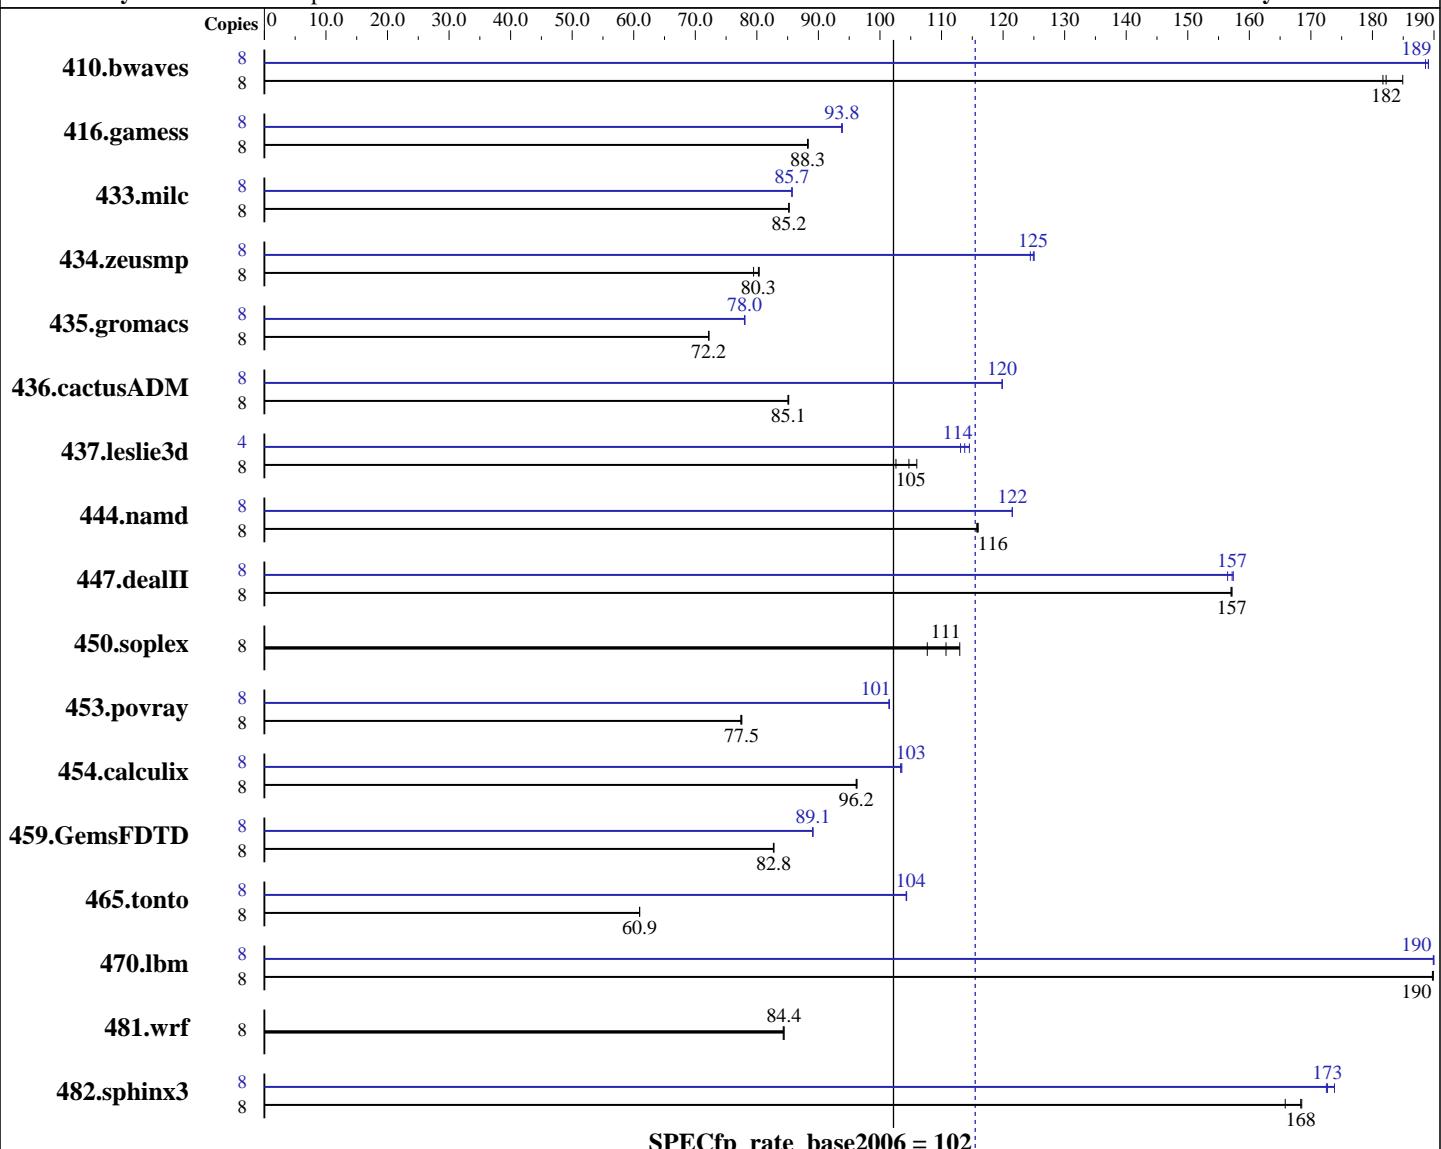

**SPECfp\_rate\_base2006 = 102**

**SPECfp\_rate2006 = 115**

## Hardware

CPU Name: POWER6  
CPU Characteristics:  
CPU MHz:  
FPU:  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip, 2 threads/core  
CPU(s) orderable: 2,4,8,12,16 cores  
Primary Cache: 64 KB I + 64 KB D on chip per core  
Secondary Cache: 4 MB I+D on chip per core

## Software

Operating System: IBM AIX 5L V5.3  
Compiler: XL C/C++ Enterprise Edition Version 9.0 for AIX  
XL Fortran Enterprise Edition Version 11.1 for AIX  
Auto Parallel: No  
File System: AIX/JFS2  
System State: Multi-user  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: --

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECfp\_rate2006 = 115**

**IBM System p 570 (4.7 GHz, 4 core)**

**SPECfp\_rate\_base2006 = 102**

**CPU2006 license:** 11

**Test date:** May-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jun-2007

**Tested by:** IBM Corporation

**Software Availability:** Jun-2007

L3 Cache: 32 MB I+D off chip per chip  
 Other Cache: None  
 Memory: 32 GB (16x2 GB) DDR2 667 MHz  
 Disk Subsystem: 1x73 GB 1x146 GB SAS 15K RPM  
 Other Hardware: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	588	185	<b>597</b>	<b>182</b>	598	182	8	<b>575</b>	<b>189</b>	576	189	<b>575</b>	189
416.gamess	8	1773	88.3	<b>1774</b>	<b>88.3</b>	1775	88.2	8	<b>1670</b>	<b>93.8</b>	1668	93.9	<b>1670</b>	93.8
433.milc	8	862	85.2	<b>862</b>	<b>85.2</b>	862	85.2	8	<b>857</b>	<b>85.7</b>	<b>857</b>	<b>85.7</b>	<b>857</b>	85.7
434.zeusmp	8	906	80.4	<b>907</b>	<b>80.3</b>	916	79.5	8	<b>585</b>	124	582	125	<b>583</b>	<b>125</b>
435.gromacs	8	<b>791</b>	<b>72.2</b>	791	72.2	791	72.2	8	<b>732</b>	<b>78.0</b>	732	78.1	732	78.0
436.cactusADM	8	1122	85.2	<b>1124</b>	<b>85.1</b>	1124	85.1	8	<b>798</b>	<b>120</b>	798	120	798	120
437.leslie3d	8	733	103	<b>718</b>	<b>105</b>	710	106	4	<b>328</b>	<b>115</b>	<b>331</b>	<b>114</b>	332	113
444.namd	8	553	116	554	116	<b>554</b>	<b>116</b>	8	<b>528</b>	<b>122</b>	528	121	528	122
447.dealII	8	583	157	582	157	<b>582</b>	<b>157</b>	8	<b>585</b>	156	<b>582</b>	<b>157</b>	581	157
450.soplex	8	591	113	<b>603</b>	<b>111</b>	620	108	8	<b>591</b>	113	<b>603</b>	<b>111</b>	620	108
453.povray	8	<b>549</b>	<b>77.5</b>	549	77.6	550	77.4	8	<b>419</b>	<b>101</b>	419	101	419	102
454.calculix	8	687	96.1	686	96.3	<b>686</b>	<b>96.2</b>	8	<b>639</b>	103	637	104	<b>638</b>	<b>103</b>
459.GemsFDTD	8	<b>1026</b>	<b>82.8</b>	1026	82.8	1027	82.7	8	<b>953</b>	89.1	<b>953</b>	<b>89.1</b>	953	89.1
465.tonto	8	1291	61.0	<b>1292</b>	<b>60.9</b>	1292	60.9	8	<b>755</b>	104	754	104	<b>755</b>	<b>104</b>
470.lbm	8	579	190	<b>579</b>	<b>190</b>	579	190	8	<b>579</b>	190	579	190	<b>579</b>	<b>190</b>
481.wrf	8	1060	84.3	<b>1059</b>	<b>84.4</b>	1059	84.4	8	<b>1060</b>	84.3	<b>1059</b>	<b>84.4</b>	1059	84.4
482.sphinx3	8	940	166	<b>926</b>	<b>168</b>	925	169	8	<b>904</b>	173	897	174	<b>903</b>	<b>173</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

AIX 5L V5.3 updated with the 5300-06 Technology Level.

See flags file for details on following settings.

all ulimits set to unlimited

Environment variables set before executing benchmarks:

```
MALLOCOPTIONS=pool
MEMORY_AFFINITY=MCM
XLFRTEOPTS=intrinthds=1
```

System set to "Enhanced" mode when defining partition on HMC

1536 pages of size 16M defined on systems with vmo command

fdpr binary optimization tool used for peak versions of

410.bwaves 434.zeusmp 453.povray 470.lbm 482.sphinx3

submit used to bind benchmark to a processor using "bindprocessor"

The "IBM System p 570" and "IBM System i 570" are electronically equivalent.

The results have been measured on the "IBM System p 570" model.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 115**

IBM System p 570 (4.7 GHz, 4 core)

**SPECfp\_rate\_base2006 = 102**

CPU2006 license: 11

**Test date:** May-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Jun-2007

**Tested by:** IBM Corporation

**Software Availability:** Jun-2007

## Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

## Base Portability Flags

410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC\_CPU\_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed

## Base Optimization Flags

C benchmarks:

-bmaxdata:0x40000000 -O5 -qlargepage -D\_ILS\_MACROS -blpdata

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -D\_ILS\_MACROS -qrtti=all  
-D\_\_IBM\_FAST\_VECTOR -blpdata

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap  
-qalias=nostd -blpdata

Benchmarks using both Fortran and C:

-bmaxdata:0x60000000 -O5 -qlargepage -D\_ILS\_MACROS  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 115**

IBM System p 570 (4.7 GHz, 4 core)

**SPECfp\_rate\_base2006 = 102**

CPU2006 license: 11

**Test date:** May-2007

Test sponsor: IBM Corporation

**Hardware Availability:** Jun-2007

Tested by: IBM Corporation

**Software Availability:** Jun-2007

## Base Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads  
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads  
-qsuppress=1500-036

## Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

## Peak Portability Flags

410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC\_CPU\_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed

## Peak Optimization Flags

C benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 115**

IBM System p 570 (4.7 GHz, 4 core)

**SPECfp\_rate\_base2006 = 102**

CPU2006 license: 11

Test date: May-2007

Test sponsor: IBM Corporation

Hardware Availability: Jun-2007

Tested by: IBM Corporation

Software Availability: Jun-2007

## Peak Optimization Flags (Continued)

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D\_ILS\_MACROS  
-qalign=natural -blpdata

470.lbm: -O5 -qlargepage -D\_ILS\_MACROS -q64 -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx  
-qvecnvol -D\_ILS\_MACROS -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx  
-qvecnvol -D\_ILS\_MACROS -blpdata

447.dealII: -bmaxdata:0x50000000 -O5 -qlargepage -D\_ILS\_MACROS  
-qrtti=all -D\_\_IBM\_FAST\_VECTOR -blpdata

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx  
-qvecnvol -D\_ILS\_MACROS -qalign=natural -blpdata

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol  
-qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -qenablevmx -qvecnvol -qxlf90=nosignedzero  
-blpdata

437.leslie3d: -O5 -qlargepage -q64 -blpdata

459.GemsFDTD: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -qenablevmx -qvecnvol -blpdata

465.tonto: -bmaxdata:0x20000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5  
-qlargepage -blpdata

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage -qenablevmx  
-qvecnvol -D\_ILS\_MACROS -blpdata

436.cactusADM: -bmaxdata:0x60000000 -D\_ILS\_MACROS -blpdata

454.calculix: -O4 -qlargepage -q64 -D\_ILS\_MACROS -blpdata

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECfp\_rate2006 = 115**

IBM System p 570 (4.7 GHz, 4 core)

**SPECfp\_rate\_base2006 = 102**

CPU2006 license: 11

**Test date:** May-2007

Test sponsor: IBM Corporation

**Hardware Availability:** Jun-2007

Tested by: IBM Corporation

**Software Availability:** Jun-2007

## Peak Optimization Flags (Continued)

481.wrf: basepeak = yes

## Peak Other Flags

C benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

C++ benchmarks:

-qipa=noobject -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads  
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads  
-qsuppress=1500-036

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090715.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090715.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 11:06:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 June 2007.