



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**IBM Corporation**

**SPECint\_rate2006 = 41.4**

**IBM System x3655 (AMD Opteron 2212)**

**SPECint\_rate\_base2006 = 37.4**

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Jul-2007

Hardware Availability: Oct-2006

Software Availability: Mar-2007

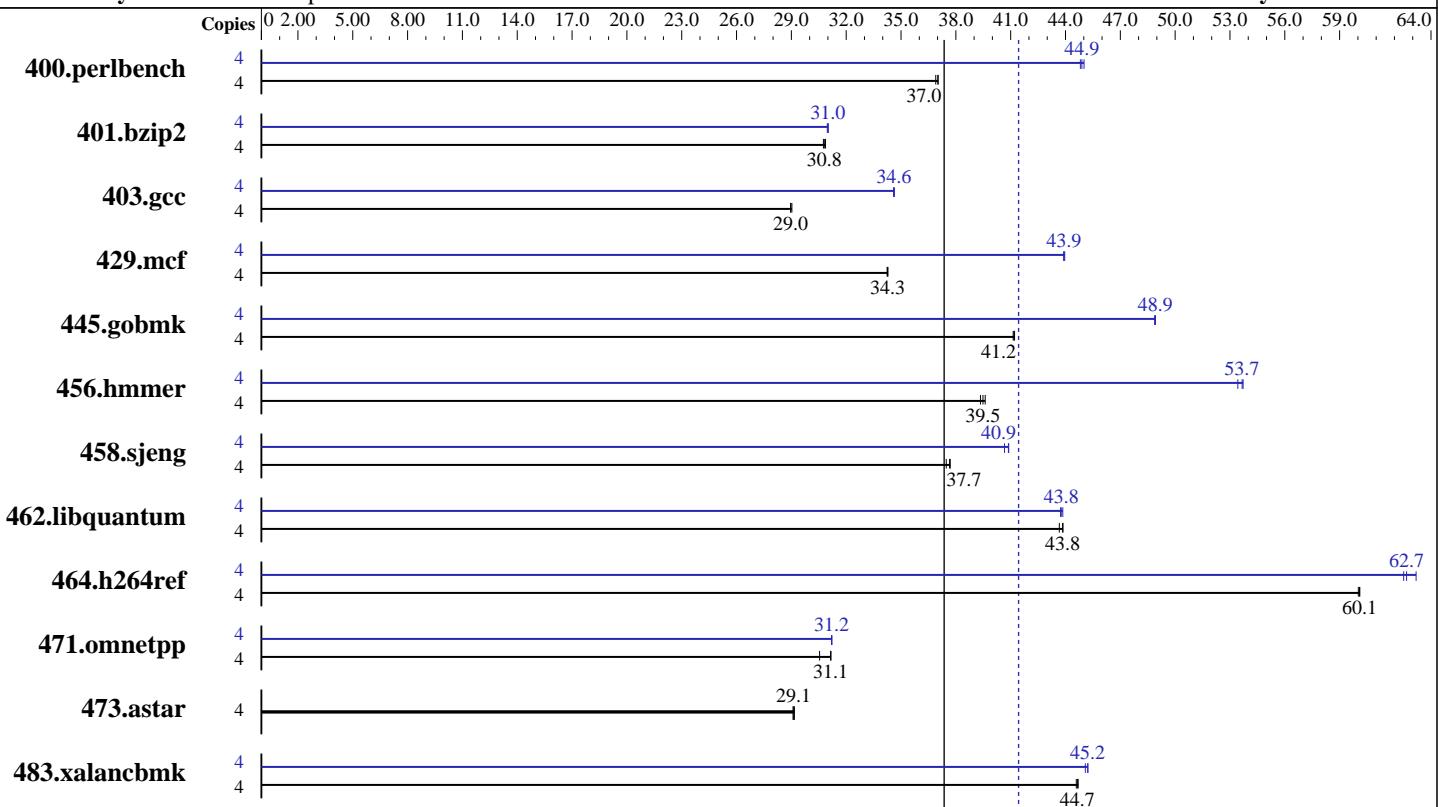

**SPECint\_rate\_base2006 = 37.4**

**SPECint\_rate2006 = 41.4**

## Hardware

CPU Name:	AMD Opteron 2212
CPU Characteristics:	
CPU MHz:	2000
FPU:	Integrated
CPU(s) enabled:	4 cores, 2 chips, 2 cores/chip
CPU(s) orderable:	1, 2 chips
Primary Cache:	64 KB I + 64 KB D on chip per core
Secondary Cache:	1 MB I+D on chip per core
L3 Cache:	None
Other Cache:	None
Memory:	16 GB (8 x 2GB DDR2-5300 ECC)
Disk Subsystem:	1 x 36 GB SAS, 10000 RPM
Other Hardware:	None

## Software

Operating System:	SLES 10 (x86_64), 2.6.16.21-0.8-smp
Compiler:	QLogic PathScale Compiler Suite, Release 3.0
Auto Parallel:	No
File System:	ext3
System State:	Multi-user, run level 3
Base Pointers:	32/64-bit
Peak Pointers:	32/64-bit
Other Software:	MicroQuill SmartHeap 8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 41.4**

IBM System x3655 (AMD Opteron 2212)

**SPECint\_rate\_base2006 = 37.4**

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	<b>1056</b>	<b>37.0</b>	1055	37.0	1059	36.9	4	872	44.8	868	45.0	<b>870</b>	<b>44.9</b>
401.bzip2	4	1250	30.9	1255	30.8	<b>1253</b>	<b>30.8</b>	4	<b>1245</b>	<b>31.0</b>	1246	31.0	1245	31.0
403.gcc	4	1112	29.0	1109	29.0	<b>1112</b>	<b>29.0</b>	4	<b>930</b>	<b>34.6</b>	930	34.6	931	34.6
429.mcf	4	1065	34.2	1064	34.3	<b>1065</b>	<b>34.3</b>	4	<b>831</b>	<b>43.9</b>	830	44.0	831	43.9
445.gobmk	4	1018	41.2	<b>1019</b>	<b>41.2</b>	1020	41.1	4	<b>858</b>	<b>48.9</b>	858	48.9	858	48.9
456.hammer	4	948	39.3	<b>945</b>	<b>39.5</b>	942	39.6	4	698	53.4	<b>695</b>	<b>53.7</b>	695	53.7
458.sjeng	4	1284	37.7	1291	37.5	<b>1285</b>	<b>37.7</b>	4	1190	40.7	<b>1184</b>	<b>40.9</b>	1184	40.9
462.libquantum	4	1898	43.7	1890	43.9	<b>1890</b>	<b>43.8</b>	4	<b>1894</b>	<b>43.8</b>	1895	43.7	1890	43.9
464.h264ref	4	1475	60.0	<b>1473</b>	<b>60.1</b>	1473	60.1	4	1401	63.2	<b>1413</b>	<b>62.7</b>	1416	62.5
471.omnetpp	4	802	31.2	<b>803</b>	<b>31.1</b>	818	30.5	4	801	31.2	<b>801</b>	<b>31.2</b>	801	31.2
473.astar	4	<b>964</b>	<b>29.1</b>	963	29.2	965	29.1	4	<b>964</b>	<b>29.1</b>	963	29.2	965	29.1
483.xalancbmk	4	618	44.7	<b>618</b>	<b>44.7</b>	619	44.6	4	610	45.2	612	45.1	<b>610</b>	<b>45.2</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

taskset utility used to bind CPU(s) to processes

## Base Compiler Invocation

C benchmarks:  
pathcc

C++ benchmarks:  
pathCC

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hammer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 41.4**

IBM System x3655 (AMD Opteron 2212)

**SPECint\_rate\_base2006 = 37.4**

CPU2006 license: 11

**Test date:** Jul-2007

Test sponsor: IBM Corporation

**Hardware Availability:** Oct-2006

Tested by: IBM Corporation

**Software Availability:** Mar-2007

## Base Optimization Flags

C benchmarks:

-Ofast -OPT:malloc\_alg=1

C++ benchmarks:

-Ofast -m32 -L/tools/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

## Peak Compiler Invocation

C benchmarks:

pathcc

C++ benchmarks:

pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hammer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -Ofast  
-LNO:opt=0

401.bzip2: -O3 -LNO:ou\_prod\_max=10 -OPT:Ofast -OPT:alias=disjoint

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint\_rate2006 = 41.4

IBM System x3655 (AMD Opteron 2212)

SPECint\_rate\_base2006 = 37.4

CPU2006 license: 11

Test date: Jul-2007

Test sponsor: IBM Corporation

Hardware Availability: Oct-2006

Tested by: IBM Corporation

Software Availability: Mar-2007

## Peak Optimization Flags (Continued)

403.gcc: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -m32 -O3  
-OPT:Ofast

429.mcf: -m32 -O3 -ipa -L/tools/SmartHeap\_8.1/lib -lsmartheap

445.gobmk: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-OPT:alias=disjoint -LNO:simd=0 -LNO:minvariant=off  
-WOPT:retype\_expr=on

456.hmmr: -O2 -OPT:alias=disjoint -OPT:malloc\_alg=1 -CG:cflow=0

458.sjeng: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=50000 -IPA:pu\_reorder=2

462.libquantum: -O3 -ipa -CG:local\_fwd\_sched=on -IPA:space=1000

464.h264ref: -fb\_create fbdata(pass 1) -fb\_opt fbdata(pass 2) -O3  
-IPA:plimit=20000 -OPT:alias=disjoint -LNO:prefetch=0

C++ benchmarks:

471.omnetpp: -Ofast -CG:gcm=off -m32  
-L/tools/SmartHeap\_8.1/lib -lsmartheap

473.astar: basepeak = yes

483.xalancbmk: -Ofast -m32 -OPT:unroll\_times\_max=8  
-L/tools/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

-IPA:max\_jobs=2

C++ benchmarks:

-IPA:max\_jobs=2

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.13.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090714.13.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.13.xml)



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

**SPECint\_rate2006 = 41.4**

IBM System x3655 (AMD Opteron 2212)

**SPECint\_rate\_base2006 = 37.4**

**CPU2006 license:** 11

**Test date:** Jul-2007

**Test sponsor:** IBM Corporation

**Hardware Availability:** Oct-2006

**Tested by:** IBM Corporation

**Software Availability:** Mar-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 12:24:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 21 August 2007.