



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Bb-m6  
(Intel Xeon processor 5130)

**SPECint\_rate2006 = 49.9**

**SPECint\_rate\_base2006 = 46.0**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2007

Hardware Availability: Jan-2007

Software Availability: Jun-2007

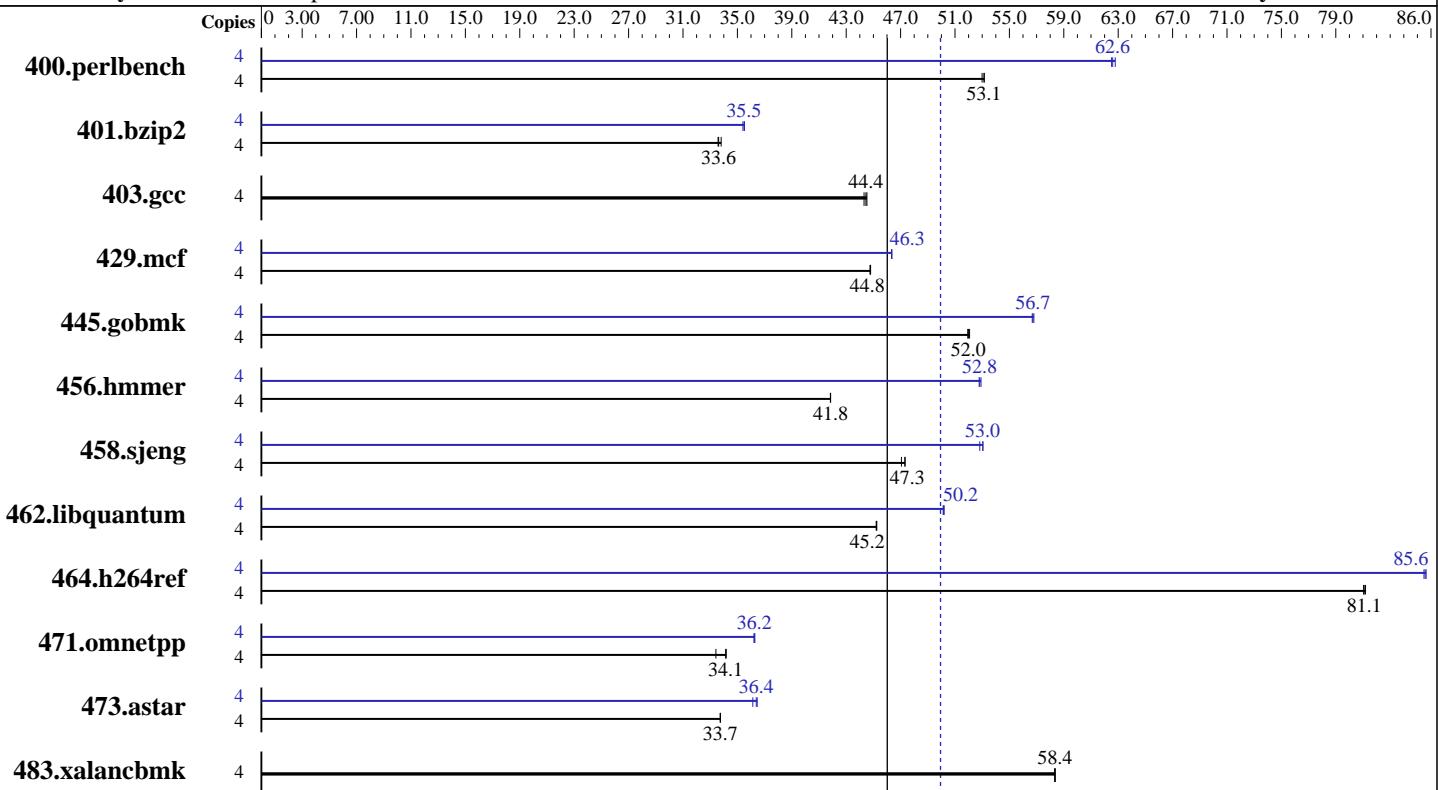

**SPECint\_rate\_base2006 = 46.0**

**SPECint\_rate2006 = 49.9**

### Hardware

CPU Name: Intel Xeon 5130  
CPU Characteristics: 2.00 GHz, 4MB L2, 1333MHz bus  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
CPU(s) orderable: 1,2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 4 MB I+D on chip per chip  
L3 Cache: None  
Other Cache: None  
Memory: 8 GB (8x1 GB PC2-5300F, 2 rank, CL5-5-5, ECC)  
Disk Subsystem: 1x73.2 GB SAS, 10000RPM  
Other Hardware: None

### Software

Operating System: 64-Bit SUSE LINUX Enterprise Server 10, Kernel 2.6.16.21-0.8-smp for x86\_64  
Compiler: Intel C++ Compiler for IA32/EM64T application, Version 10.0 - Build 20070426 Package ID: l\_cc\_p\_10.0.023  
Auto Parallel: No  
File System: ext2  
System State: Multiuser, Runlevel 3  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: MicroQuill SmartHeap library 8.1 binutils-2.17.tar.gz, Version 2.17



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Bb-m6  
(Intel Xeon processor 5130)

**SPECint\_rate2006 = 49.9**

**SPECint\_rate\_base2006 = 46.0**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Sep-2007

Hardware Availability: Jan-2007

Software Availability: Jun-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	737	53.0	<b>736</b>	<b>53.1</b>	735	53.2	4	622	62.8	625	62.5	<b>624</b>	<b>62.6</b>
401.bzip2	4	<b>1148</b>	<b>33.6</b>	1142	33.8	1150	33.6	4	1090	35.4	<b>1088</b>	<b>35.5</b>	1087	35.5
403.gcc	4	727	44.3	723	44.5	<b>724</b>	<b>44.4</b>	4	727	44.3	723	44.5	<b>724</b>	<b>44.4</b>
429.mcf	4	814	44.8	<b>815</b>	<b>44.8</b>	815	44.8	4	787	46.3	<b>787</b>	<b>46.3</b>	787	46.4
445.gobmk	4	806	52.1	808	51.9	<b>807</b>	<b>52.0</b>	4	740	56.7	739	56.8	<b>740</b>	<b>56.7</b>
456.hmmer	4	892	41.9	<b>892</b>	<b>41.8</b>	892	41.8	4	705	52.9	<b>707</b>	<b>52.8</b>	707	52.8
458.sjeng	4	1028	47.1	1023	47.3	<b>1023</b>	<b>47.3</b>	4	<b>912</b>	<b>53.0</b>	916	52.8	912	53.1
462.libquantum	4	<b>1832</b>	<b>45.2</b>	1832	45.2	1833	45.2	4	<b>1652</b>	<b>50.2</b>	1653	50.1	1651	50.2
464.h264ref	4	<b>1092</b>	<b>81.1</b>	1090	81.2	1092	81.0	4	1034	85.6	<b>1034</b>	<b>85.6</b>	1036	85.5
471.omnetpp	4	748	33.4	731	34.2	<b>732</b>	<b>34.1</b>	4	689	36.3	<b>690</b>	<b>36.2</b>	690	36.2
473.astar	4	832	33.7	<b>832</b>	<b>33.7</b>	832	33.8	4	777	36.1	770	36.5	<b>772</b>	<b>36.4</b>
483.xalancbmk	4	<b>473</b>	<b>58.4</b>	473	58.3	473	58.4	4	<b>473</b>	<b>58.4</b>	473	58.3	473	58.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer,  
for peak, are compiled in 64-bit mode

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Bb-m6  
(Intel Xeon processor 5130)

**SPECint\_rate2006 = 49.9**

**SPECint\_rate\_base2006 = 46.0**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Sep-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Jun-2007

## Base Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc

401.bzip2: /opt/intel/cce/10.0.023/bin/icc  
-L/opt/intel/cce/10.0.023/lib  
-I/opt/intel/cce/10.0.023/include

456.hmmr: /opt/intel/cce/10.0.023/bin/icc  
-L/opt/intel/cce/10.0.023/lib  
-I/opt/intel/cce/10.0.023/include

C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmr: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Bb-m6  
(Intel Xeon processor 5130)

**SPECint\_rate2006 = 49.9**

**SPECint\_rate\_base2006 = 46.0**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Sep-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Jun-2007

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast

403.gcc: basepeak = yes

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec\_div -ansi-alias

456.hmmer: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -Obo  
-prefetch -opt-streaming-stores always

464.h264ref: Same as 456.hmmer

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec\_div -ansi-alias -Wl,-z,muldefs  
-L/opt/SmartHeap\_8.1/lib -lsmartheap

473.astar: Same as 471.omnetpp

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/NEC-ic10-ia32-intel64-linux-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/NEC-ic10-ia32-intel64-linux-flags.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/120Bb-m6  
(Intel Xeon processor 5130)

**SPECint\_rate2006 = 49.9**

**SPECint\_rate\_base2006 = 46.0**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Sep-2007

**Hardware Availability:** Jan-2007

**Software Availability:** Jun-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 15:11:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 November 2007.