



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 75.6

IBM BladeCenter JS22 (4.0 GHz, 4 core)

SPECfp_rate_base2006 = 67.8

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

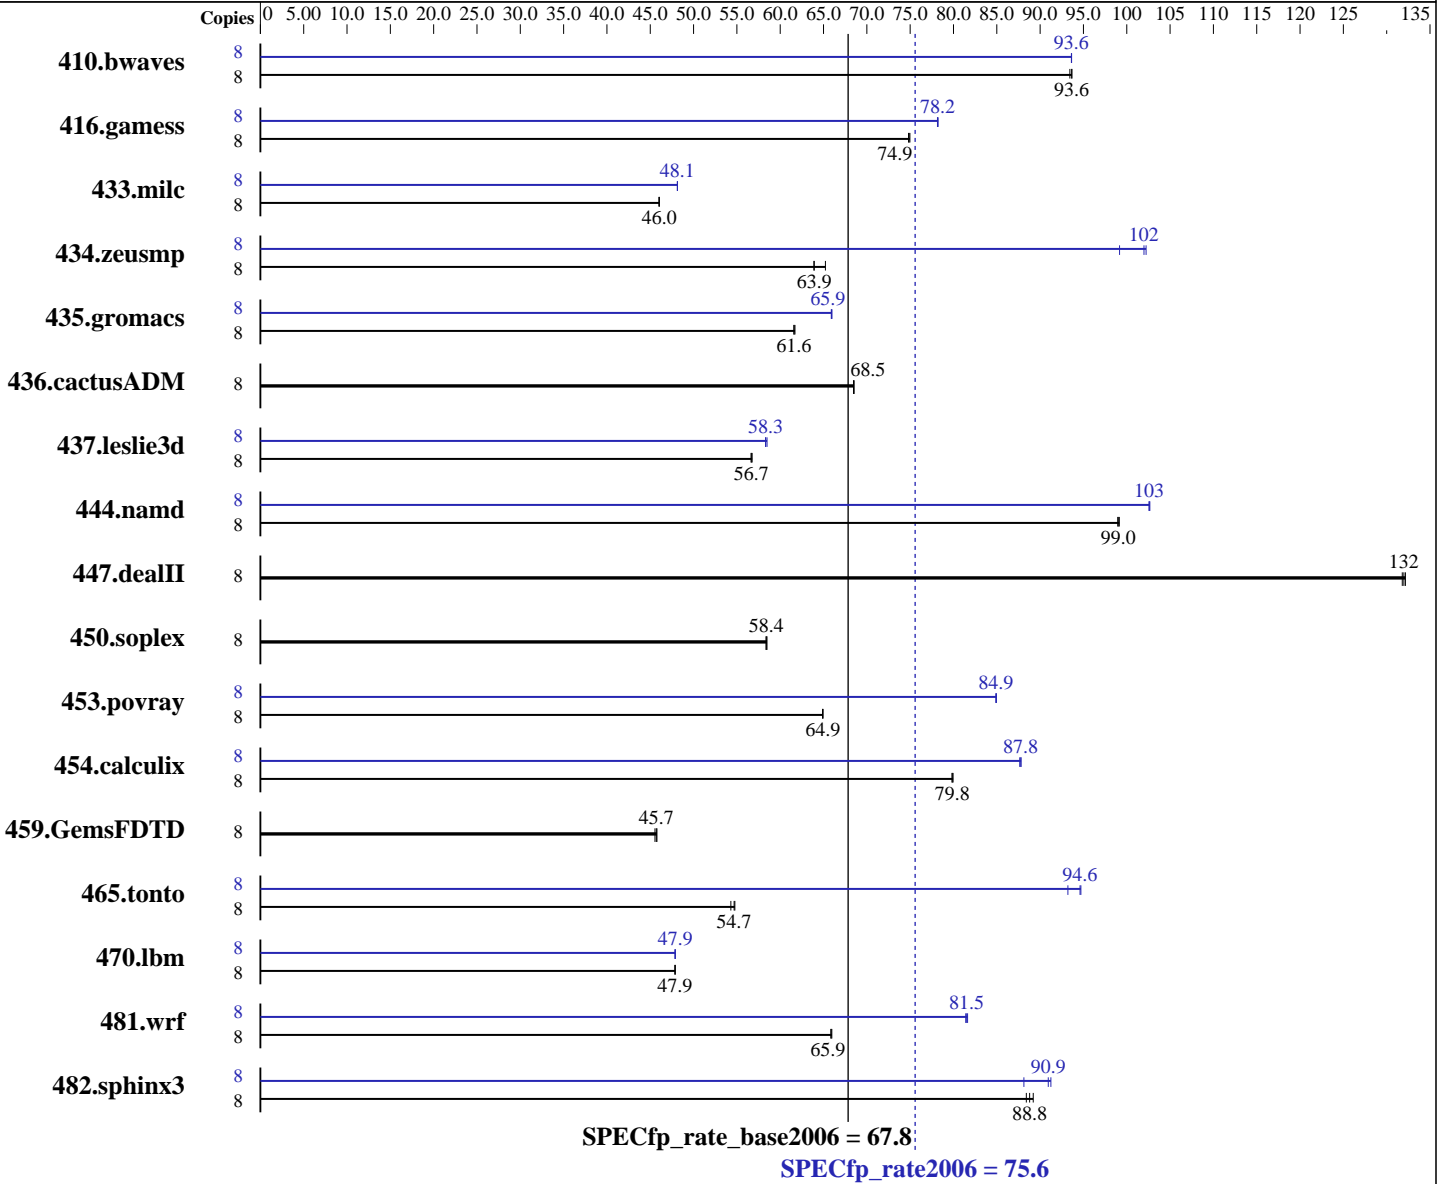

Hardware

CPU Name: POWER6
 CPU Characteristics: 4000
 CPU MHz: Integrated
 FPU: 4 cores, 2 chips, 2 cores/chip, 2 threads/core
 CPU(s) enabled: 4 cores
 CPU(s) orderable: 4 cores
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 4 MB I+D on chip per core

Continued on next page

Software

Operating System: IBM AIX 5L V5.3
 Compiler: XL C/C++ Enterprise Edition Version 9.0 for AIX
 XL Fortran Enterprise Edition Version 11.1 for AIX
 Auto Parallel: No
 File System: AIX/JFS2
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = **75.6**

IBM BladeCenter JS22 (4.0 GHz, 4 core)

SPECfp_rate_base2006 = **67.8**

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Nov-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

L3 Cache: None
Other Cache: None
Memory: 16 GB (4x4 GB) DDR2 667 MHz
Disk Subsystem: 1x146 GB SAS 15K RPM
Other Hardware: None

Other Software: IBM Engineering and Scientific Subroutine Library (ESSL) version 4.3.0.2

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1164	93.4	1161	93.7	<u>1161</u>	<u>93.6</u>	8	1161	93.6	1161	93.6	<u>1161</u>	<u>93.6</u>
416.gamess	8	2089	75.0	2094	74.8	<u>2092</u>	<u>74.9</u>	8	2004	78.2	2002	78.2	<u>2004</u>	<u>78.2</u>
433.milc	8	1596	46.0	1595	46.0	<u>1595</u>	<u>46.0</u>	8	1526	48.1	1526	48.1	<u>1526</u>	<u>48.1</u>
434.zeusmp	8	<u>1139</u>	<u>63.9</u>	1139	63.9	1116	65.2	8	734	99.2	<u>714</u>	<u>102</u>	712	102
435.gromacs	8	928	61.6	926	61.7	<u>927</u>	<u>61.6</u>	8	867	65.9	<u>866</u>	<u>65.9</u>	866	66.0
436.cactusADM	8	<u>1396</u>	<u>68.5</u>	1396	68.5	1395	68.5	8	<u>1396</u>	<u>68.5</u>	1396	68.5	1395	68.5
437.leslie3d	8	1325	56.8	<u>1327</u>	<u>56.7</u>	1327	56.7	8	1286	58.5	<u>1289</u>	<u>58.3</u>	1290	58.3
444.namd	8	648	99.0	647	99.1	<u>648</u>	<u>99.0</u>	8	625	103	<u>625</u>	<u>103</u>	625	103
447.dealII	8	<u>693</u>	<u>132</u>	694	132	692	132	8	<u>693</u>	<u>132</u>	694	132	692	132
450.soplex	8	<u>1143</u>	<u>58.4</u>	1143	58.4	1141	58.5	8	<u>1143</u>	<u>58.4</u>	1143	58.4	1141	58.5
453.povray	8	<u>656</u>	<u>64.9</u>	656	64.9	655	64.9	8	501	84.9	<u>501</u>	<u>84.9</u>	501	85.0
454.calculix	8	827	79.8	<u>827</u>	<u>79.8</u>	825	80.0	8	753	87.6	752	87.8	<u>752</u>	<u>87.8</u>
459.GemsFDTD	8	1854	45.8	<u>1857</u>	<u>45.7</u>	1864	45.5	8	1854	45.8	<u>1857</u>	<u>45.7</u>	1864	45.5
465.tonto	8	1450	54.3	<u>1440</u>	<u>54.7</u>	1437	54.8	8	845	93.2	<u>832</u>	<u>94.6</u>	831	94.7
470.lbm	8	2296	47.9	2296	47.9	<u>2296</u>	<u>47.9</u>	8	2296	47.9	2296	47.9	<u>2296</u>	<u>47.9</u>
481.wrf	8	1357	65.9	1355	66.0	<u>1357</u>	<u>65.9</u>	8	1098	81.4	<u>1096</u>	<u>81.5</u>	1095	81.6
482.sphinx3	8	1764	88.4	<u>1756</u>	<u>88.8</u>	1748	89.2	8	<u>1715</u>	<u>90.9</u>	1709	91.2	1769	88.1

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

AIX 5L V5.3 updated with the 5300-07 Technology Level.
IBM XL Compilers updated to October 2007 PTF Level.

See flags file for details on following settings:

all ulimits set to unlimited

Environment variables set before executing benchmarks:

MALLOCOPTIONS=pool

MEMORY_AFFINITY=MCM

XLFRTEOPTS=intrinths=1

768 pages of size 16M defined on systems with vmo command

fdpr binary optimization tool used for peak versions of: 433.milc, 453.povray, 470.lbm, 482.sphinx3
submit used to bind benchmark to a processor using "bindprocessor"

The binaries were compiled on a system with 32 GB of memory.



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 75.6

IBM BladeCenter JS22 (4.0 GHz, 4 core)

SPECfp_rate_base2006 = 67.8

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Nov-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc /usr/bin/xlf95

Base Portability Flags

410.bwaves: -qfixed

416.gamess: -qfixed

434.zeusmp: -qfixed

435.gromacs: -qfixed -qextname

436.cactusADM: -qfixed -qextname

437.leslie3d: -qfixed

454.calculix: -qfixed -qextname

481.wrf: -DNOUNDERSCORE -DSPEC_CPU_AIX

482.sphinx3: -qchars=signed

Base Optimization Flags

C benchmarks:

-qlanglvl=extc99 -bmaxdata:0x40000000 -O5 -qlargepage

C++ benchmarks:

-bmaxdata:0x50000000 -O5 -qlargepage -qrtti=all -D__IBM_FAST_VECTOR

Fortran benchmarks:

-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap

-qalias=nostd

Benchmarks using both Fortran and C:

-qlanglvl=extc99 -bmaxdata:0x60000000 -O5 -qlargepage

-qsmallstack=dynlenonheap -qalias=nostd

Base Other Flags

C benchmarks:

-qipa=threads -qsuppress=1500-036

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 75.6

IBM BladeCenter JS22 (4.0 GHz, 4 core)

SPECfp_rate_base2006 = 67.8

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Nov-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Other Flags (Continued)

C++ benchmarks:

-qipa=threads -qsuppress=1500-036

Fortran benchmarks:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Benchmarks using both Fortran and C:

-qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg -qipa=threads
-qsuppress=1500-036

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc

C++ benchmarks:

/usr/vacpp/bin/xlC

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DNOUNDERSCORE -DSPEC_CPU_AIX
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -qlanglvl=extc99 -O5 -qfdpr -qlargepage
-bmaxdata:0x40000000 -blpdata

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 75.6

IBM BladeCenter JS22 (4.0 GHz, 4 core)

SPECfp_rate_base2006 = 67.8

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Nov-2007

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

470.ibm: -qlanglvl=extc99 -O5 -qlargepage -qfdpr -q64 -qenablevmx
-qhot=simd -blpdata

482.sphinx3: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5

447.dealII: basepeak = yes

450.soplex: basepeak = yes

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qfdpr -qenablevmx
-qvecnv01

Fortran benchmarks:

410.bwaves: -O5 -qlargepage -qsmallstack=dynlenonheap
-bmaxdata:0x50000000 -blpdata

416.gamess: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qalias=nostd
-bmaxdata:0x60000000

434.zeusmp: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=pwr6e -qtune=pwr6
-qxf90=nosignedzero -qlargepage -qenablevmx
-bmaxdata:0x40000000 -blpdata

437.leslie3d: -O4 -qlargepage -q64 -blpdata

459.GemsFDTD: basepeak = yes

465.tonto: -bmaxdata:0x60000000 -blpdata -qpdf1(pass 1) -qpdf2(pass 2)
-O5 -qlargepage -less1

Benchmarks using both Fortran and C:

435.gromacs: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-bdatapsize:64K -bstackpsize:64K

436.cactusADM: basepeak = yes

454.calculix: -qlanglvl=extc99 -qpdf1(pass 1) -qpdf2(pass 2) -O4
-qlargepage -blpdata

481.wrf: -qlanglvl=extc99 -bmaxdata:0x60000000 -O5 -qlargepage
-qsmallstack=dynlenonheap



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 75.6

IBM BladeCenter JS22 (4.0 GHz, 4 core)

SPECfp_rate_base2006 = 67.8

CPU2006 license: 11

Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

Peak Other Flags

C++ benchmarks:

447.dealII: -qipa=threads -qsuppress=1500-036

450.soplex: -qipa=threads -qsuppress=1500-036

Fortran benchmarks:

459.GemsFDTD: -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qipa=threads -qsuppress=1500-036

Benchmarks using both Fortran and C:

436.cactusADM: -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qipa=threads -qsuppress=1500-036

481.wrf: -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qipa=threads -qsuppress=1500-036

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.08.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090714.08.xml

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 13:42:14 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 December 2007.