



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

### SPECfp®\_rate2006 = 49.4

### Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

### SPECfp\_rate\_base2006 = 48.1

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Nov-2007

Hardware Availability: Nov-2007

Software Availability: Nov-2007

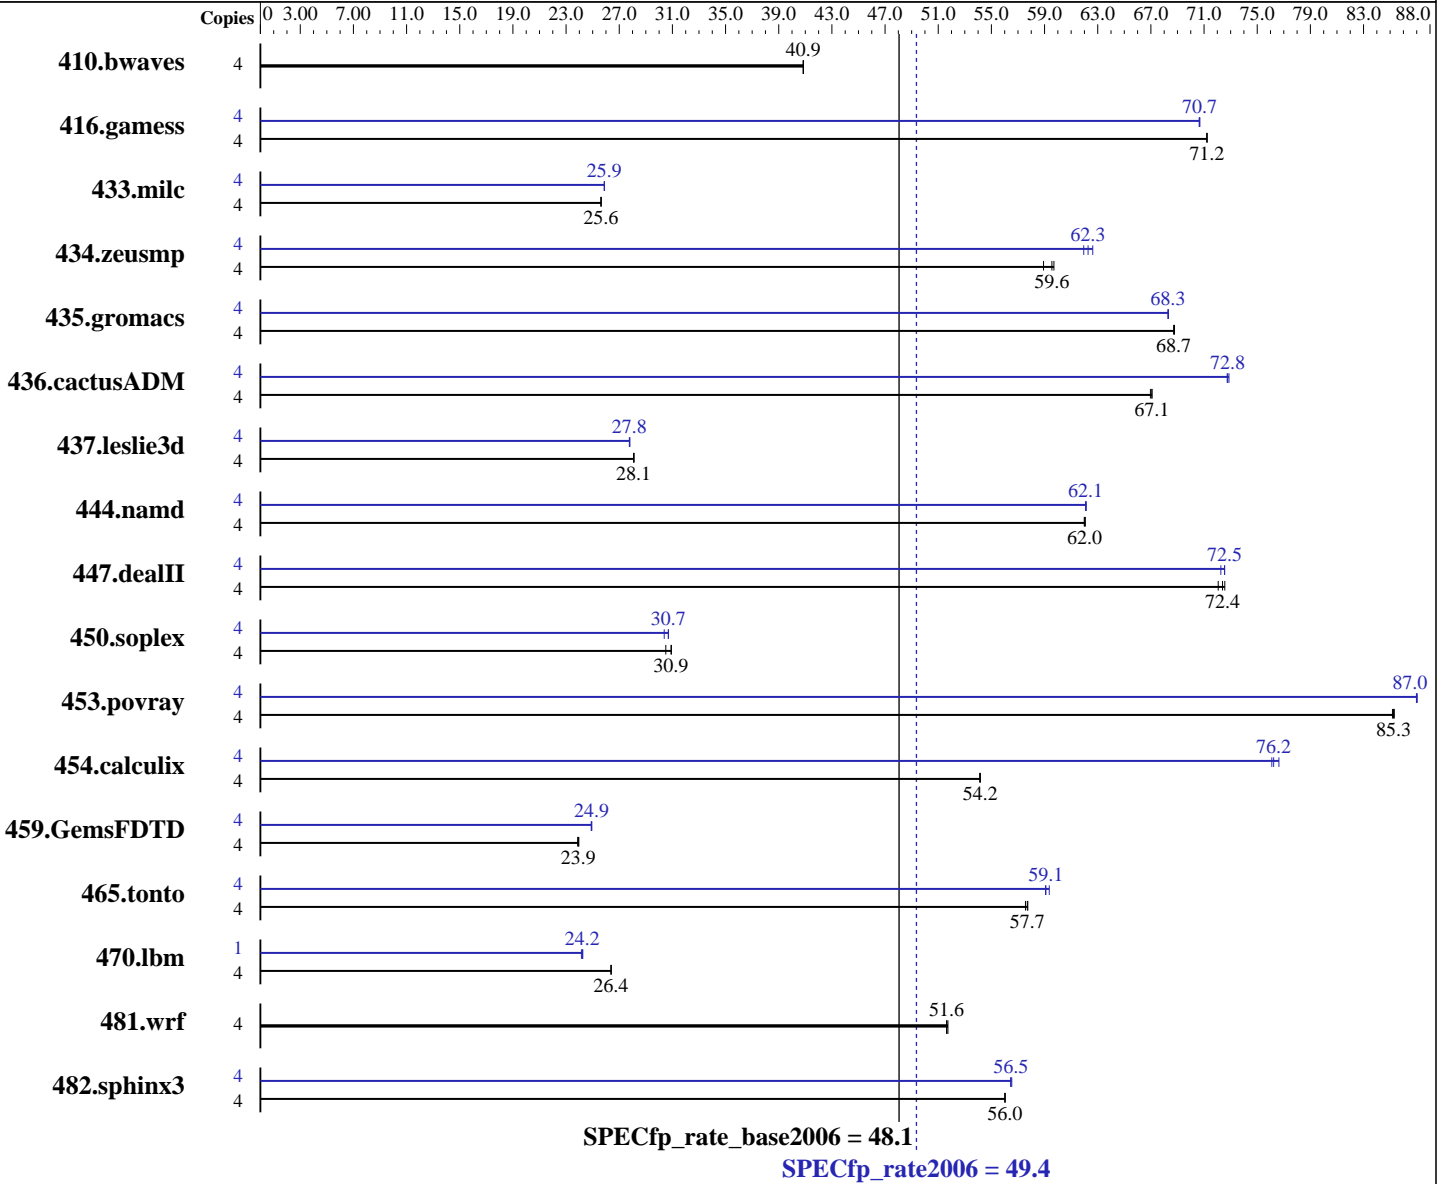

#### Hardware

CPU Name: Intel Core 2 Extreme QX6850  
 CPU Characteristics: 3.00 GHz 1333 MHz FSB  
 CPU MHz: 3000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 8 MB I+D on chip per chip, 4 MB shared / 2 cores

Continued on next page

#### Software

Operating System: Windows Vista64 Ultimate  
 Compiler: Intel C++ Compiler for IA32 version 10.1  
 Build 20070913 Package ID: w\_cc\_p\_10.1.011  
 Intel Fortran Compiler for IA32 version 10.1  
 Build 20070913 Package ID: w\_fc\_p\_10.1.011  
 Microsoft Visual Studio 2005 SP1 (for libraries)  
 Auto Parallel: No  
 File System: NTFS  
 System State: Default

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Intel Corporation

SPECfp\_rate2006 = 49.4

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECfp\_rate\_base2006 = 48.1

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

L3 Cache: None  
 Other Cache: None  
 Memory: 4 GB (4x1GB Corsair TWIN3X2048-1333C9DHX DDR3-1333 CL9)  
 Disk Subsystem: Seagate 320GB NCQ SATA, 16MB cache, 7200 RPM  
 Other Hardware: None

Base Pointers: 32-bit  
 Peak Pointers: 32-bit  
 Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	<b>1331</b>	<b>40.9</b>	1331	40.8	1330	40.9	4	<b>1331</b>	<b>40.9</b>	1331	40.8	1330	40.9		
416.gamess	4	1100	71.2	1100	71.2	<b>1100</b>	<b>71.2</b>	4	1108	70.7	<b>1108</b>	<b>70.7</b>	1109	70.6		
433.milc	4	<b>1433</b>	<b>25.6</b>	1433	25.6	1432	25.6	4	1420	25.9	<b>1419</b>	<b>25.9</b>	1418	25.9		
434.zeusmp	4	618	58.9	<b>611</b>	<b>59.6</b>	610	59.7	4	588	61.9	581	62.6	<b>585</b>	<b>62.3</b>		
435.gromacs	4	415	68.8	<b>416</b>	<b>68.7</b>	416	68.7	4	418	68.3	418	68.3	<b>418</b>	<b>68.3</b>		
436.cactusADM	4	714	67.0	<b>713</b>	<b>67.1</b>	713	67.1	4	<b>657</b>	<b>72.8</b>	657	72.7	656	72.9		
437.leslie3d	4	1339	28.1	1338	28.1	<b>1338</b>	<b>28.1</b>	4	1354	27.8	<b>1354</b>	<b>27.8</b>	1352	27.8		
444.namd	4	<b>517</b>	<b>62.0</b>	517	62.1	518	62.0	4	517	62.1	516	62.1	<b>517</b>	<b>62.1</b>		
447.dealII	4	<b>632</b>	<b>72.4</b>	635	72.1	631	72.6	4	633	72.3	631	72.5	<b>631</b>	<b>72.5</b>		
450.soplex	4	1079	30.9	1094	30.5	<b>1080</b>	<b>30.9</b>	4	<b>1087</b>	<b>30.7</b>	1098	30.4	1086	30.7		
453.povray	4	249	85.3	250	85.2	<b>250</b>	<b>85.3</b>	4	244	87.0	<b>245</b>	<b>87.0</b>	245	87.0		
454.calculix	4	610	54.1	<b>609</b>	<b>54.2</b>	609	54.2	4	<b>433</b>	<b>76.2</b>	434	76.1	431	76.6		
459.GemsFDTD	4	<b>1774</b>	<b>23.9</b>	1771	24.0	1778	23.9	4	1705	24.9	<b>1703</b>	<b>24.9</b>	1702	24.9		
465.tonto	4	682	57.7	<b>682</b>	<b>57.7</b>	684	57.6	4	666	59.1	<b>666</b>	<b>59.1</b>	663	59.4		
470.lbm	4	2083	26.4	<b>2083</b>	<b>26.4</b>	2083	26.4	1	566	24.3	<b>567</b>	<b>24.2</b>	569	24.2		
481.wrf	4	864	51.7	865	51.6	<b>865</b>	<b>51.6</b>	4	864	51.7	865	51.6	<b>865</b>	<b>51.6</b>		
482.sphinx3	4	1392	56.0	<b>1391</b>	<b>56.0</b>	1391	56.0	4	1381	56.4	<b>1381</b>	<b>56.5</b>	1379	56.5		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## General Notes

Tested systems can be used with Shin-G ATX case, Antec NeoPower 480W power supply  
 Product description located as of 11/2007:  
<http://www.asus.com/products.aspx?l1=3&l2=11&l3=572&l4=0&model=1872&modelmenu=1>  
 The system bus runs at 1333 MHz  
 System was configured with Asus EN8800GTX discrete graphics card  
 Binaries were built on Windows Vista32  
 The following VS 2005 SP1 updates were applied: KB926601 and KB932232  
 The start command with the /affinity switch was used to bind processes to cores



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 49.4

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECfp\_rate\_base2006 = 48.1

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

## Base Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

C++ benchmarks:

icl -Qvc8

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icl -Qvc8 -Qc99 ifort

## Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Base Optimization Flags

C benchmarks:

-fast /F1000000000

C++ benchmarks:

-fast -Qcxx\_features /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE

Fortran benchmarks:

-fast /F1000000000

Benchmarks using both Fortran and C:

-fast /F1000000000

## Peak Compiler Invocation

C benchmarks:

icl -Qvc8 -Qc99

C++ benchmarks:

icl -Qvc8

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 49.4

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECfp\_rate\_base2006 = 48.1

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

## Peak Compiler Invocation (Continued)

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icl -Qvc8 -Qc99 ifort

## Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore  
444.namd: -TP  
447.dealII: -DDEAL\_II\_MEMBER\_VAR\_SPECIALIZATION\_BUG  
453.povray: -DSPEC\_CPU\_WINDOWS\_ICL  
454.calculix: -DSPEC\_CPU\_NOZMODIFIER -Qlowercase  
481.wrf: -DSPEC\_CPU\_WINDOWS\_ICL

## Peak Optimization Flags

C benchmarks:

433.milc: -fast -Qunroll2 -Oa /F1000000000  
470.lbm: -fast -Qunroll2 -Qscalar-rep- -Qprefetch /F1000000000  
482.sphinx3: -fast -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: -fast -Oa -Qcxx\_features /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE  
447.dealII: -fast -Qunroll2 -Qprefetch -Qcxx\_features /F1000000000  
shlw32m.lib -link /FORCE:MULTIPLE  
450.soplex: -fast -Qcxx\_features /F1000000000 shlw32m.lib  
-link /FORCE:MULTIPLE  
453.povray: -fast -Qunroll4 -Qansi-alias -Qcxx\_features /F1000000000  
shlw32m.lib -link /FORCE:MULTIPLE

Fortran benchmarks:

410.bwaves: basepeak = yes  
416.gamess: -fast -Qunroll2 -Ob0 -Qansi-alias -Qscalar-rep-  
/F1000000000

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Intel Corporation

SPECfp\_rate2006 = 49.4

Asus P5E3 Deluxe (Intel Core 2 Extreme QX6850)

SPECfp\_rate\_base2006 = 48.1

CPU2006 license: 13

Test date: Nov-2007

Test sponsor: Intel Corporation

Hardware Availability: Nov-2007

Tested by: Intel Corporation

Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

434.zeusmp: -QxT -O2 -Qprec-div- -Qunroll10 -Qscalar-rep- /F1000000000

437.leslie3d: -fast -Qprefetch /F1000000000

459.GemsFDTD: -fast -Qunroll12 -Ob0 -Qprefetch /F1000000000

465.tonto: -fast -Qunroll14 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -fast -Oa -Qprefetch /F1000000000

436.cactusADM: -fast -Qunroll12 -Qprefetch /F1000000000

454.calculix: -fast -Qunroll-aggressive /F1000000000

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.09.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.09.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 14:29:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 November 2007.