



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 72.8

IBM BladeCenter HS21 (Intel Xeon E5440)

SPECfp_rate_base2006 = 64.8

CPU2006 license: 11


Test sponsor: IBM Corporation

Tested by: IBM Corporation

Test date: Nov-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

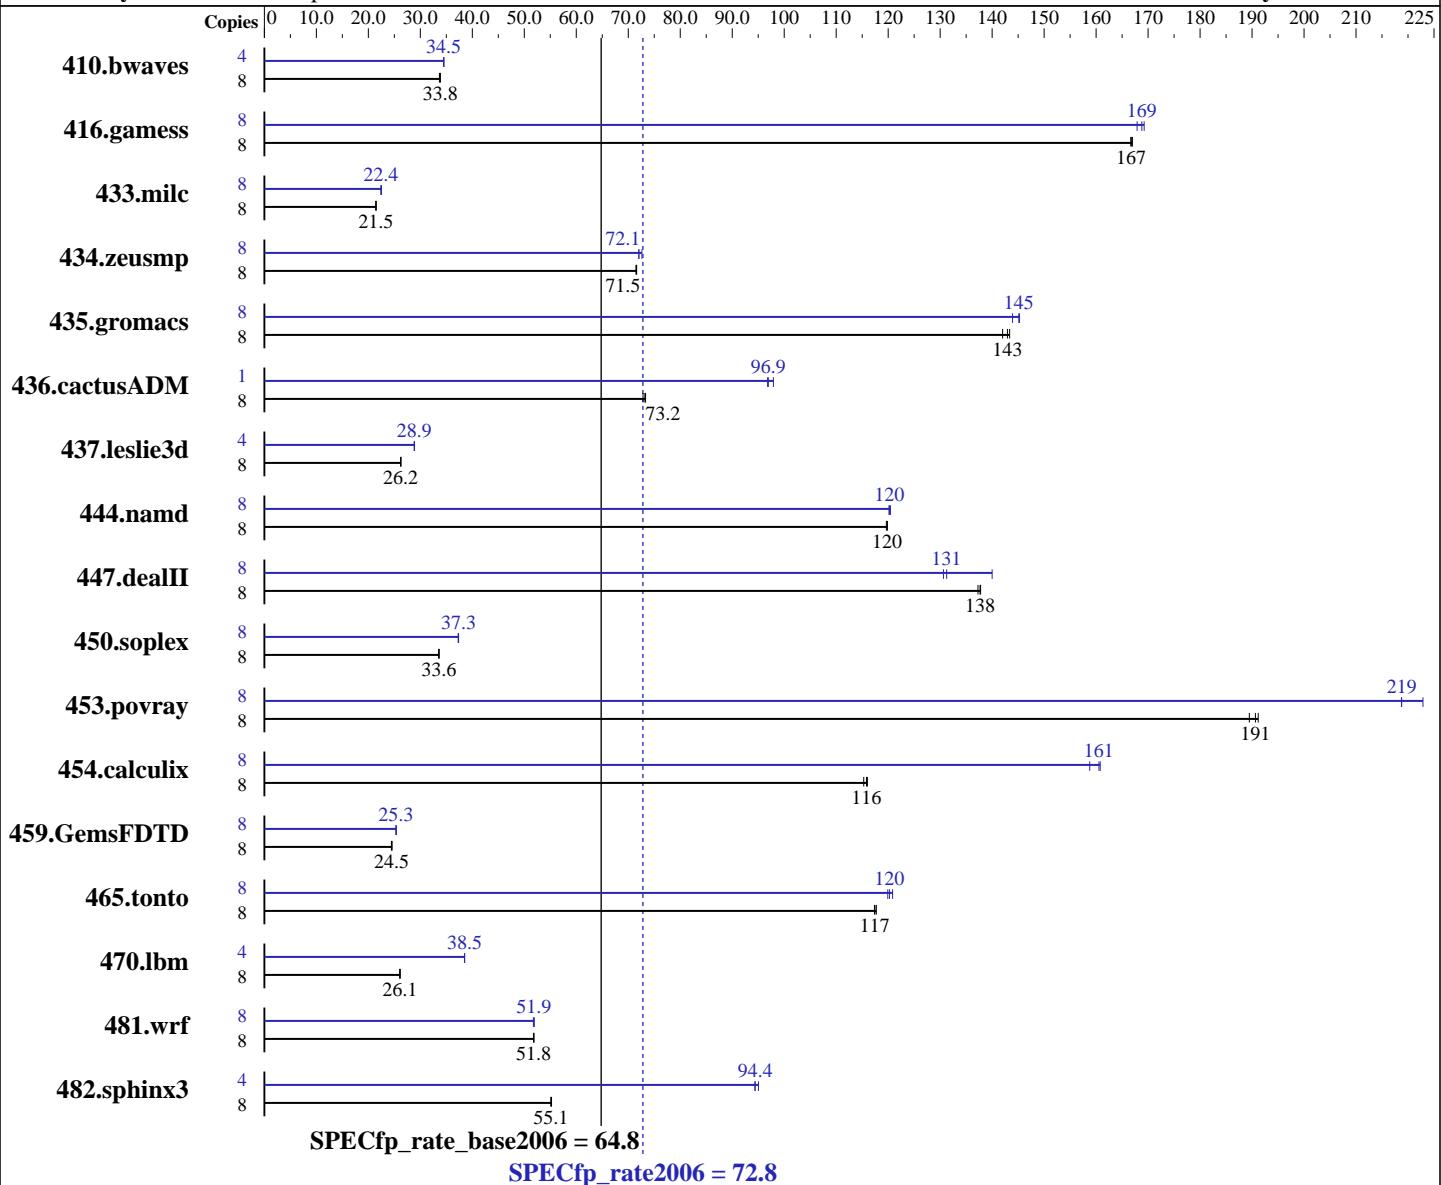

Hardware

CPU Name: Intel Xeon E5440
CPU Characteristics: 1333MHz system bus
CPU MHz: 2833
FPU: Integrated
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
CPU(s) orderable: 1,2 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64), kernel 2.6.16.21-0.8-smp
Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l_cc_p_10.1.008, l_fc_p_10.1.008
Auto Parallel: Yes
File System: ReiserFS
System State: Multi-user, run level 3
Base Pointers: 64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 72.8

IBM BladeCenter HS21 (Intel Xeon E5440)

SPECfp_rate_base2006 = 64.8

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8 x 2 GB DDR2-5300F ECC)
 Disk Subsystem: 1 x 36 GB SAS, 10000 RPM
 Other Hardware: Memory and I/O Expansion Unit (P/N 42C1600)

Peak Pointers: 32/64-bit
 Other Software: Binutils 2.17.50.0.15

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3229	33.7	3214	33.8	3214	33.8	4	1575	34.5	1576	34.5	1575	34.5
416.gamess	8	938	167	939	167	940	167	8	926	169	933	168	928	169
433.milc	8	3417	21.5	3418	21.5	3427	21.4	8	3260	22.5	3273	22.4	3274	22.4
434.zeusmp	8	1018	71.5	1017	71.6	1018	71.5	8	1011	72.0	1002	72.6	1010	72.1
435.gromacs	8	402	142	398	143	400	143	8	394	145	397	144	393	145
436.cactusADM	8	1312	72.8	1304	73.3	1306	73.2	1	123	96.9	123	96.8	122	97.9
437.leslie3d	8	2869	26.2	2863	26.3	2866	26.2	4	1305	28.8	1302	28.9	1303	28.9
444.namd	8	536	120	535	120	535	120	8	533	120	534	120	533	120
447.dealII	8	667	137	664	138	665	138	8	701	131	654	140	697	131
450.soplex	8	1987	33.6	1989	33.5	1985	33.6	8	1786	37.3	1786	37.4	1790	37.3
453.povray	8	225	189	223	191	223	191	8	195	219	195	219	191	223
454.calculix	8	569	116	572	115	570	116	8	416	159	410	161	411	161
459.GemsFDTD	8	3456	24.6	3474	24.4	3467	24.5	8	3345	25.4	3350	25.3	3351	25.3
465.tonto	8	671	117	669	118	670	117	8	656	120	655	120	651	121
470.lbm	8	4222	26.0	4211	26.1	4210	26.1	4	1427	38.5	1427	38.5	1428	38.5
481.wrf	8	1725	51.8	1725	51.8	1724	51.8	8	1722	51.9	1727	51.7	1723	51.9
482.sphinx3	8	2828	55.1	2828	55.1	2823	55.2	4	826	94.4	820	95.0	826	94.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode

Hardware Sector Prefetch Enabled and Adjacent Sector Prefetch Disabled

OMP_NUM_THREADS set to number of cores

KMP_AFFINITY set to physical,0

KMP_STACKSIZE set to 64M

taskset utility used to bind CPU(s) to processes

Base Compiler Invocation

C benchmarks:

icc

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 72.8

IBM BladeCenter HS21 (Intel Xeon E5440)

SPECfp_rate_base2006 = 64.8

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast

C++ benchmarks:

-fast

Fortran benchmarks:

-fast

Benchmarks using both Fortran and C:

-fast



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 72.8

IBM BladeCenter HS21 (Intel Xeon E5440)

SPECfp_rate_base2006 = 64.8

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

icc ifort

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12  
-scalar-rep -prefetch -opt-malloc-options=3
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation	SPECfp_rate2006 = 72.8
IBM BladeCenter HS21 (Intel Xeon E5440)	SPECfp_rate_base2006 = 64.8
CPU2006 license: 11	Test date: Nov-2007
Test sponsor: IBM Corporation	Hardware Availability: Jan-2008
Tested by: IBM Corporation	Software Availability: Nov-2007

Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll12

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias
-auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12 -O0
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll14 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll12
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.11.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 72.8

IBM BladeCenter HS21 (Intel Xeon E5440)

SPECfp_rate_base2006 = 64.8

CPU2006 license: 11

Test date: Nov-2007

Test sponsor: IBM Corporation

Hardware Availability: Jan-2008

Tested by: IBM Corporation

Software Availability: Nov-2007

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10.1-FP-intel64-linux-flags.20090714.11.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 15:08:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2007.