



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 35.5

Dell Precision T3400 (Intel E6850, 3.00 GHz)

SPECint_rate_base2006 = 33.7

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

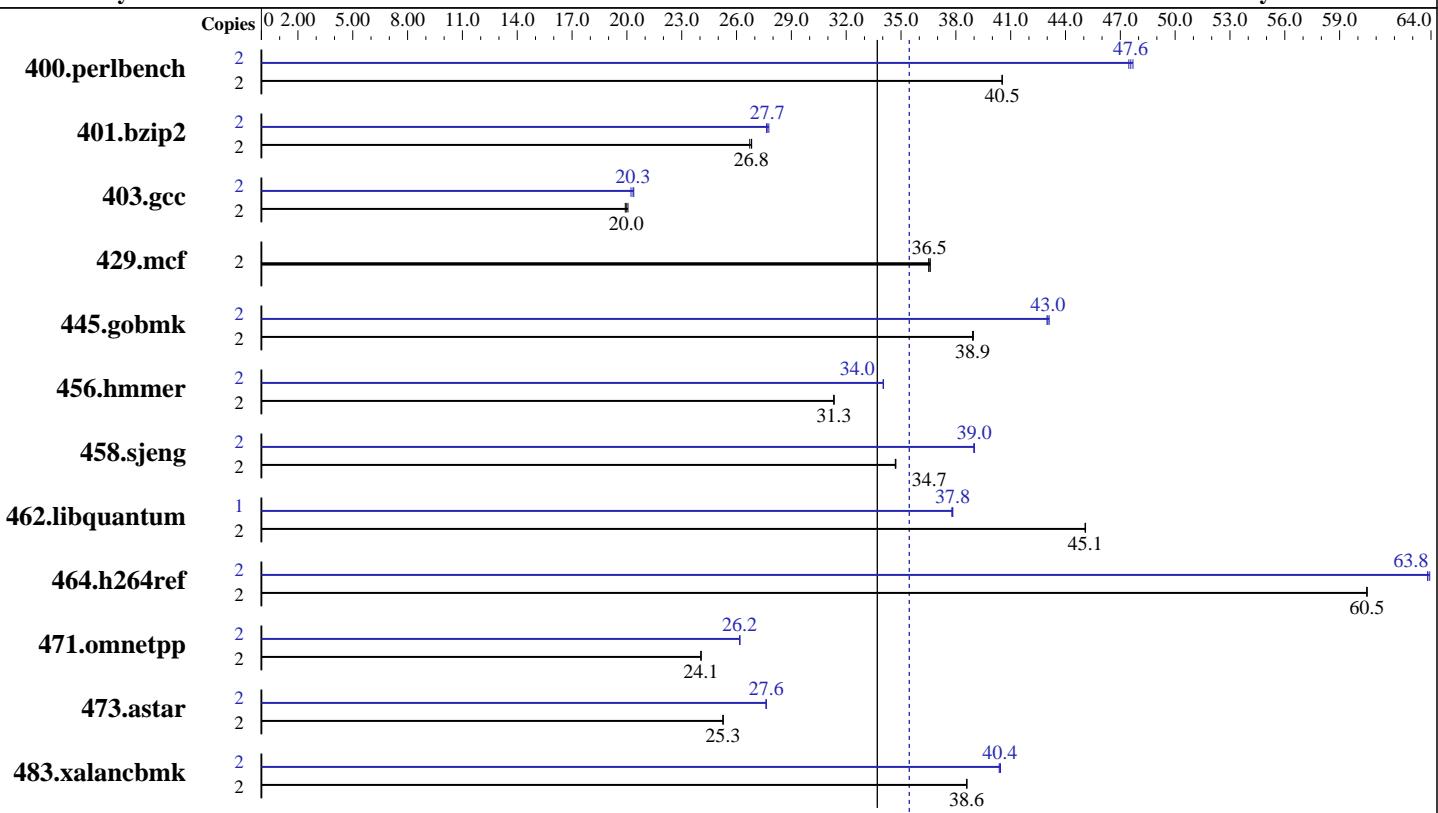

Hardware		Software	
CPU Name:	Intel Core 2 Duo E6850	Operating System:	Windows XP Professional x64 Edition SP2
CPU Characteristics:	1333 MHz Bus Speed	Compiler:	Intel C++ Compiler for IA-32, Version 10.1
CPU MHz:	3000		Build 20070913 Package ID: w_cc_p_10.1.011
FPU:	Integrated		Microsoft Visual Studio 2005 SP1
CPU(s) enabled:	2 cores, 1 chip, 2 cores/chip	Auto Parallel:	Yes
CPU(s) orderable:	1 chip	File System:	NTFS
Primary Cache:	32 KB I + 32 KB D on chip per core	System State:	Default
Secondary Cache:	4 MB I+D on chip per chip	Base Pointers:	32-bit
L3 Cache:	None	Peak Pointers:	32-bit
Other Cache:	None	Other Software:	MicroQuill SmartHeap Library 8.0
Memory:	4 GB (4x1 GB 800 MHz ECC CL6 DDR2)		
Disk Subsystem:	1 x 80 GB SATA 7200 RPM		
Other Hardware:	None		



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 35.5

Dell Precision T3400 (Intel E6850, 3.00 GHz)

SPECint_rate_base2006 = 33.7

CPU2006 license: 55

Dec-2007

Test sponsor: Dell Inc.

Hardware Availability: Oct-2007

Tested by: Dell Inc.

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	2	482	40.5	482	40.5	482	40.5	2	412	47.5	411	47.6	410	47.7
401.bzip2	2	722	26.7	719	26.8	720	26.8	2	695	27.8	697	27.7	698	27.6
403.gcc	2	806	20.0	803	20.1	809	19.9	2	796	20.2	792	20.3	790	20.4
429.mcf	2	499	36.5	499	36.5	498	36.6	2	499	36.5	499	36.5	498	36.6
445.gobmk	2	539	39.0	539	38.9	539	38.9	2	487	43.1	487	43.0	488	43.0
456.hmmer	2	596	31.3	596	31.3	596	31.3	2	548	34.0	548	34.0	548	34.0
458.sjeng	2	698	34.7	697	34.7	697	34.7	2	621	39.0	620	39.0	620	39.0
462.libquantum	2	919	45.1	919	45.1	919	45.1	1	548	37.8	548	37.8	548	37.8
464.h264ref	2	732	60.5	732	60.5	732	60.5	2	692	63.9	693	63.8	694	63.8
471.omnetpp	2	520	24.1	520	24.1	520	24.1	2	477	26.2	478	26.2	478	26.2
473.astar	2	556	25.3	556	25.3	556	25.3	2	508	27.6	508	27.6	508	27.6
483.xalancbmk	2	357	38.6	358	38.6	358	38.6	2	341	40.4	342	40.4	341	40.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

Base Compiler Invocation

C benchmarks:

```
icl -Qstd=c99
```

C++ benchmarks:

ic1

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:

```
-fast -Qpar-runtime-control -Qvec-guard-write /F512000000 shlw32m.lib  
    -link /FORCE:MULTIPLE
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 35.5

Dell Precision T3400 (Intel E6850, 3.00 GHz)

SPECint_rate_base2006 = 33.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qstd=c99
```

C++ benchmarks:

```
icl
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

```
483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
-Qprefetch -Qparallel -Qpar-runtime-control /F512000000  
shlw32m.lib -link /FORCE:MULTIPLE
```

```
401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

```
403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000  
shlw32m.lib -link /FORCE:MULTIPLE
```

```
429.mcf: basepeak = yes
```

```
445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo  
-Qprec-div- -Qansi-alias /F512000000  
-link /FORCE:MULTIPLE
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 35.5

Dell Precision T3400 (Intel E6850, 3.00 GHz)

SPECint_rate_base2006 = 33.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

```
456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll12  
          -Qansi-alias -Qopt-multi-version-aggressive /F512000000  
          shlw32m.lib           -link /FORCE:MULTIPLE
```

```
458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll14  
          /F512000000 shlw32m.lib           -link /FORCE:MULTIPLE
```

```
462.libquantum: -fast -Qunroll14 -Ob0 -Qprefetch  
          -Qopt-streaming-stores:always -Qpar-runtime-control  
          /F512000000 shlw32m.lib           -link /FORCE:MULTIPLE
```

```
464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll12  
          -Qansi-alias /F512000000 shlw32m.lib  
          -link /FORCE:MULTIPLE
```

C++ benchmarks:

```
471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
          -Qopt-ra-region-strategy=block -Qcxx_features /F512000000  
          shlw32m.lib           -link /FORCE:MULTIPLE
```

```
473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
          -Qopt-ra-region-strategy=routine -Qcxx_features /F512000000  
          shlw32m.lib           -link /FORCE:MULTIPLE
```

```
483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
          -Qcxx_features /F512000000 shlw32m.lib  
          -link /FORCE:MULTIPLE
```

Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.01.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 35.5

Dell Precision T3400 (Intel E6850, 3.00 GHz)

SPECint_rate_base2006 = 33.7

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Oct-2007

Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 14:59:27 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 26 December 2007.