



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®_rate2006 = 33.9

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECint_rate_base2006 = 31.6

CPU2006 license: 55


Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

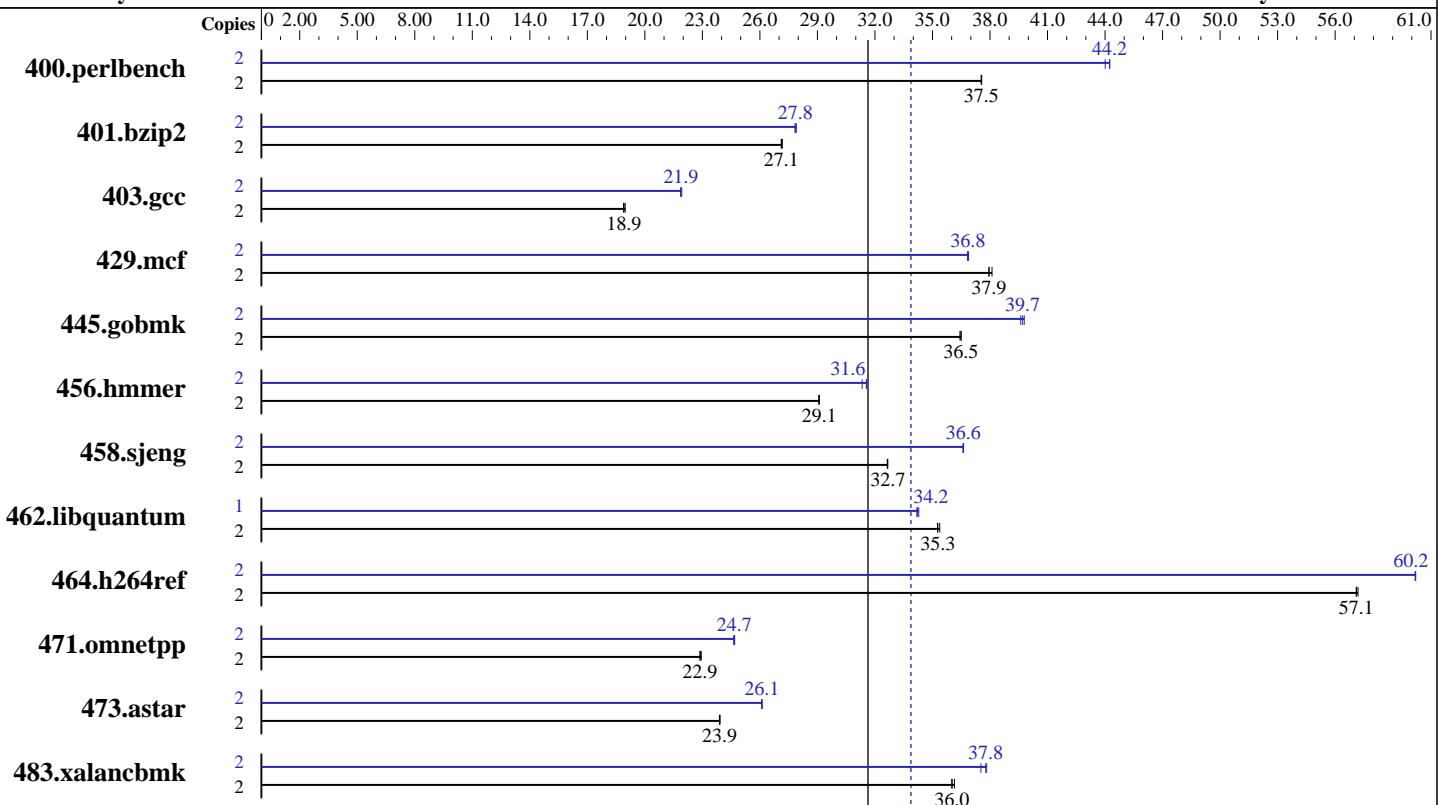

SPECint_rate_base2006 = 31.6

SPECint_rate2006 = 33.9

Hardware

CPU Name: Intel Core 2 Extreme X9000
 CPU Characteristics: 800 MHz Bus Speed
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 4 GB (2x2 GB 667 MHz CL5 DDR2)
 Disk Subsystem: 1 x 120GB SATA 7200 RPM
 Other Hardware: None

Software

Operating System: Windows XP Professional x64 Edition SP2
 Compiler: Intel C++ Compiler for IA-32, Version 10.1 Build 20070913 Package ID: w_cc_p_10.1.011 Microsoft Visual Studio 2005 SP1
 Auto Parallel: Yes
 File System: NTFS
 System State: Default
 Base Pointers: 32-bit
 Peak Pointers: 32-bit
 Other Software: MicroQuill SmartHeap Library 8.1



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 33.9

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECint_rate_base2006 = 31.6

CPU2006 license: 55

Test date: Dec-2007

Test sponsor: Dell Inc.

Hardware Availability: Jan-2008

Tested by: Dell Inc.

Software Availability: Nov-2007

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|----------------|--------|------------|-------------|------------|-------------|-------------|-------------|--------|------------|-------------|------------|-------------|------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 400.perlbench | 2 | 520 | 37.5 | 520 | 37.6 | 520 | 37.5 | 2 | 442 | 44.2 | 442 | 44.2 | 444 | 44.0 |
| 401.bzip2 | 2 | 710 | 27.2 | 712 | 27.1 | 712 | 27.1 | 2 | 693 | 27.8 | 692 | 27.9 | 693 | 27.8 |
| 403.gcc | 2 | 851 | 18.9 | 852 | 18.9 | 849 | 19.0 | 2 | 734 | 21.9 | 736 | 21.9 | 736 | 21.9 |
| 429.mcf | 2 | 479 | 38.1 | 481 | 37.9 | 481 | 37.9 | 2 | 495 | 36.8 | 495 | 36.9 | 495 | 36.8 |
| 445.gobmk | 2 | 575 | 36.5 | 576 | 36.4 | 575 | 36.5 | 2 | 527 | 39.8 | 530 | 39.6 | 528 | 39.7 |
| 456.hammer | 2 | 642 | 29.1 | 641 | 29.1 | 641 | 29.1 | 2 | 591 | 31.6 | 591 | 31.6 | 596 | 31.3 |
| 458.sjeng | 2 | 741 | 32.7 | 741 | 32.6 | 741 | 32.7 | 2 | 661 | 36.6 | 661 | 36.6 | 661 | 36.6 |
| 462.libquantum | 2 | 1171 | 35.4 | 1175 | 35.3 | 1175 | 35.3 | 1 | 605 | 34.2 | 606 | 34.2 | 604 | 34.3 |
| 464.h264ref | 2 | 775 | 57.1 | 774 | 57.2 | 775 | 57.1 | 2 | 735 | 60.2 | 735 | 60.2 | 735 | 60.2 |
| 471.omnetpp | 2 | 545 | 22.9 | 546 | 22.9 | 546 | 22.9 | 2 | 508 | 24.6 | 507 | 24.7 | 506 | 24.7 |
| 473.astar | 2 | 587 | 23.9 | 588 | 23.9 | 588 | 23.9 | 2 | 538 | 26.1 | 538 | 26.1 | 538 | 26.1 |
| 483.xalancbmk | 2 | 383 | 36.0 | 382 | 36.1 | 383 | 36.0 | 2 | 365 | 37.8 | 368 | 37.5 | 365 | 37.8 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

General Notes

Binaries were built on Windows Vista Ultimate (64-bit)

Base Compiler Invocation

C benchmarks:

icl -Qstd=c99

C++ benchmarks:

icl

Base Portability Flags

403.gcc: -DSPEC_CPU_WIN32

464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32

483.xalancbmk: -Qoption,cpp,--no_wchar_t_keyword

Base Optimization Flags

C benchmarks:

-fast -Qvec-guard-write /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 33.9

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECint_rate_base2006 = 31.6

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Base Optimization Flags (Continued)

C++ benchmarks:

```
-fast -Qcxx_features /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks:

```
icl -Qstd=c99
```

C++ benchmarks:

```
icl
```

Peak Portability Flags

```
403.gcc: -DSPEC_CPU_WIN32
```

```
464.h264ref: -DSPEC_CPU_NO_INTTYPES -DWIN32
```

```
483.xalancbmk: -Qoption,cpp, --no_wchar_t_keyword
```

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias  
-Qprefetch /F512000000 shlw32m.lib  
-link /FORCE:MULTIPLE
```

```
401.bzip2: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qprefetch  
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE
```

```
403.gcc: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast /F512000000  
-link /FORCE:MULTIPLE
```

429.mcf: Same as 401.bzip2

```
445.gobmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -QxT -O2 -Qipo  
-Qprec-div- -Qansi-alias /F512000000  
-link /FORCE:MULTIPLE
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 33.9

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECint_rate_base2006 = 31.6

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

Peak Optimization Flags (Continued)

456.hmmer: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll12
-Qansi-alias -Qopt-multi-version-aggressive /F512000000
shlw32m.lib -link /FORCE:MULTIPLE

458.sjeng: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll14
/F512000000 shlw32m.lib -link /FORCE:MULTIPLE

462.libquantum: -fast -Qunroll14 -Ob0 -Qprefetch
-Qopt-streaming-stores:always -Qparallel
-Qpar-runtime-control /F512000000 shlw32mt.lib
-link /FORCE:MULTIPLE

464.h264ref: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qunroll12
-Qansi-alias /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

C++ benchmarks:

471.omnetpp: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=block -Qcxx_features /F512000000
shlw32m.lib -link /FORCE:MULTIPLE

473.astar: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qopt-ra-region-strategy=routine -Qcxx_features /F512000000
shlw32m.lib -link /FORCE:MULTIPLE

483.xalancbmk: -Qprof_gen(pass 1) -Qprof_use(pass 2) -fast -Qansi-alias
-Qcxx_features /F512000000 shlw32m.lib
-link /FORCE:MULTIPLE

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/dell.ic10.1.windows.flags.20090714.01.xml>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint_rate2006 = 33.9

Dell Precision M6300 (Intel X9000, 2.80 GHz)

SPECint_rate_base2006 = 31.6

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Dec-2007

Hardware Availability: Jan-2008

Software Availability: Nov-2007

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 15:19:05 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 8 January 2008.