



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint[®]_rate2006 = 52.6

PRIMERGY TX300 S4, Intel Xeon E5205, 1.86 GHz

SPECint_rate_base2006 = 45.0

CPU2006 license: 22


Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

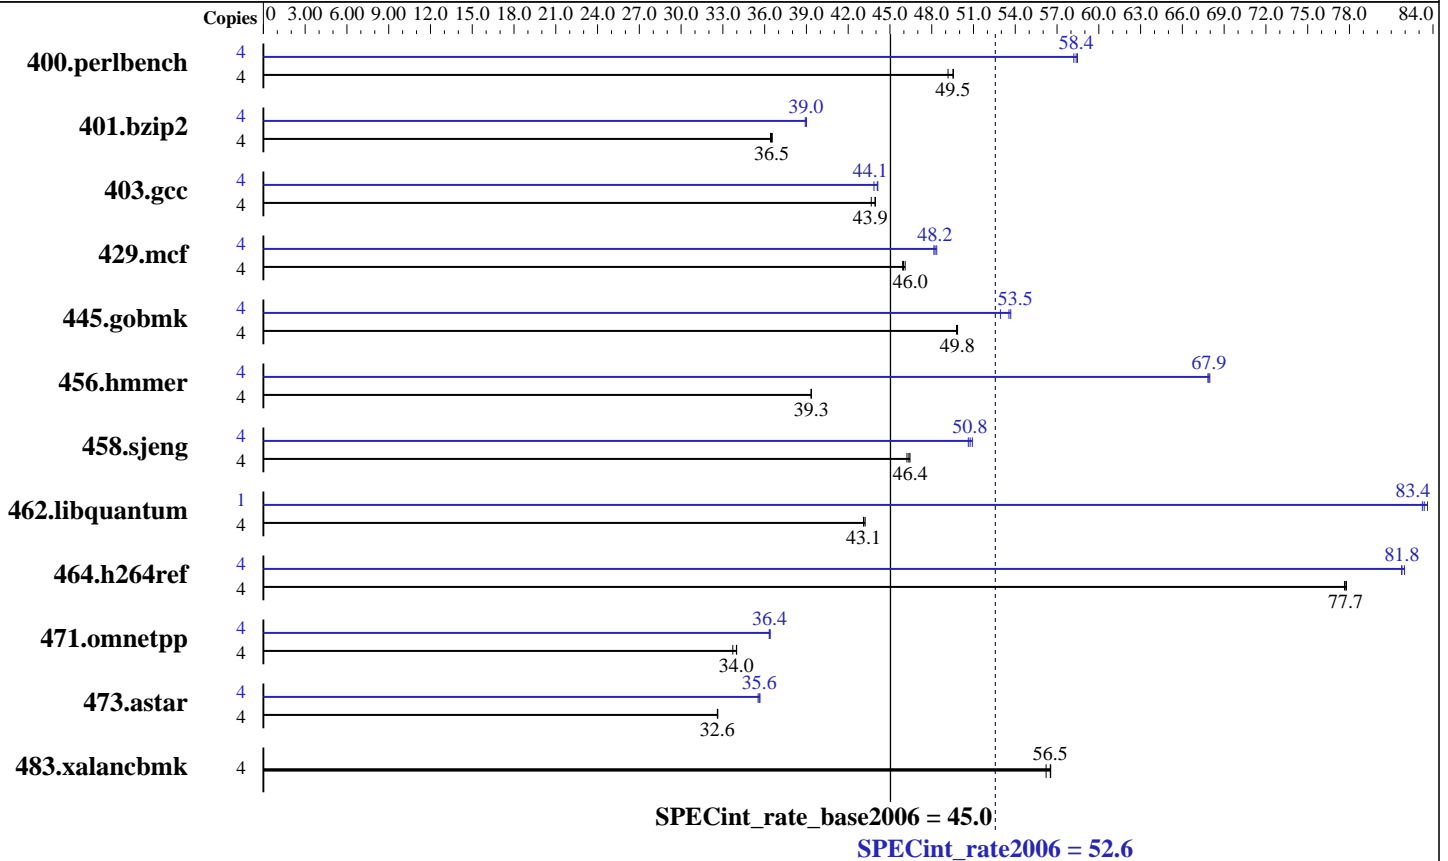

Hardware

CPU Name: Intel Xeon E5205
 CPU Characteristics: 1067 MHz system bus
 CPU MHz: 1867
 FPU: Integrated
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (8x2 GB PC2-5300F, 2 rank, CAS 5-5-5, with ECC)
 Disk Subsystem: Seagate ST973451SS (SAS, 73GB, 15000rpm)
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: Intel C++ Compiler for Linux32 and Linux64 Version 10.1 - Build 20070725
 Auto Parallel: Yes
 File System: ext2
 System State: Multiuser, Runlevel 3
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library, Version 8.1
 binutils-2.17.tar.gz, Version 2.17



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 52.6

PRIMERGY TX300 S4, Intel Xeon E5205, 1.86 GHz

SPECint_rate_base2006 = 45.0

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	789	49.5	789	49.6	795	49.2	4	668	58.5	669	58.4	671	58.2
401.bzip2	4	1056	36.5	1058	36.5	1060	36.4	4	992	38.9	990	39.0	990	39.0
403.gcc	4	733	44.0	733	43.9	738	43.7	4	730	44.1	734	43.9	730	44.1
429.mcf	4	791	46.1	795	45.9	794	46.0	4	758	48.2	754	48.4	756	48.2
445.gobmk	4	842	49.8	843	49.8	842	49.9	4	793	52.9	784	53.5	782	53.7
456.hmmmer	4	949	39.3	948	39.4	949	39.3	4	549	68.0	550	67.8	550	67.9
458.sjeng	4	1042	46.4	1047	46.2	1044	46.4	4	956	50.6	951	50.9	954	50.8
462.libquantum	4	1923	43.1	1922	43.1	1918	43.2	1	249	83.4	248	83.6	249	83.2
464.h264ref	4	1139	77.7	1140	77.6	1138	77.8	4	1083	81.7	1080	81.9	1083	81.8
471.omnetpp	4	735	34.0	736	34.0	742	33.7	4	687	36.4	687	36.4	688	36.3
473.astar	4	861	32.6	860	32.6	861	32.6	4	790	35.5	787	35.7	789	35.6
483.xalancbmk	4	488	56.5	488	56.5	491	56.2	4	488	56.5	488	56.5	491	56.2

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'OMP_NUM_THREADS' set to number of cores (default)

General Notes

This result has been produced with binaries provided and compiled by Intel.

All binaries were built with 32-bit Intel compiler except:
401.bzip2 and 456.hmmmer in peak were built with 64-bit Intel compiler by changing the path for include and library files.

BIOS configuration:
Adjacent Sector Prefetch = Disable

For information about Fujitsu Siemens Computers please see:
<http://www.fujitsu-siemens.com>

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 52.6

PRIMERGY TX300 S4, Intel Xeon E5205, 1.86 GHz

SPECint_rate_base2006 = 45.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-fast -inline-calloc -opt-malloc-options=3

C++ benchmarks:

-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

456.hmmer: /home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/bin/icc
-L/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/lib
-I/home/cmplr/usr3/alrahate/compilers/ic10.1mainline/20070725/Linux64/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 52.6

PRIMERGY TX300 S4, Intel Xeon E5205, 1.86 GHz

SPECint_rate_base2006 = 45.0

CPU2006 license: 22

Test date: Jan-2008

Test sponsor: Fujitsu Siemens Computers

Hardware Availability: Dec-2007

Tested by: Fujitsu Siemens Computers

Software Availability: Nov-2007

Peak Portability Flags (Continued)

483.xalanbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch
-opt-streaming-stores always -vec-guard-write
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.0/lib -lsmartheap

483.xalanbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Fujitsu Siemens Computers

SPECint_rate2006 = 52.6

PRIMERGY TX300 S4, Intel Xeon E5205, 1.86 GHz

SPECint_rate_base2006 = 45.0

CPU2006 license: 22

Test sponsor: Fujitsu Siemens Computers

Tested by: Fujitsu Siemens Computers

Test date: Jan-2008

Hardware Availability: Dec-2007

Software Availability: Nov-2007

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.01.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic10-ia32-intel64-linux-flags.20090714.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 15:56:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 19 February 2008.