



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®2006 = 17.1

ProLiant BL685c G5
(2.3 GHz AMD Opteron 8356)

SPECfp_base2006 = 15.0

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

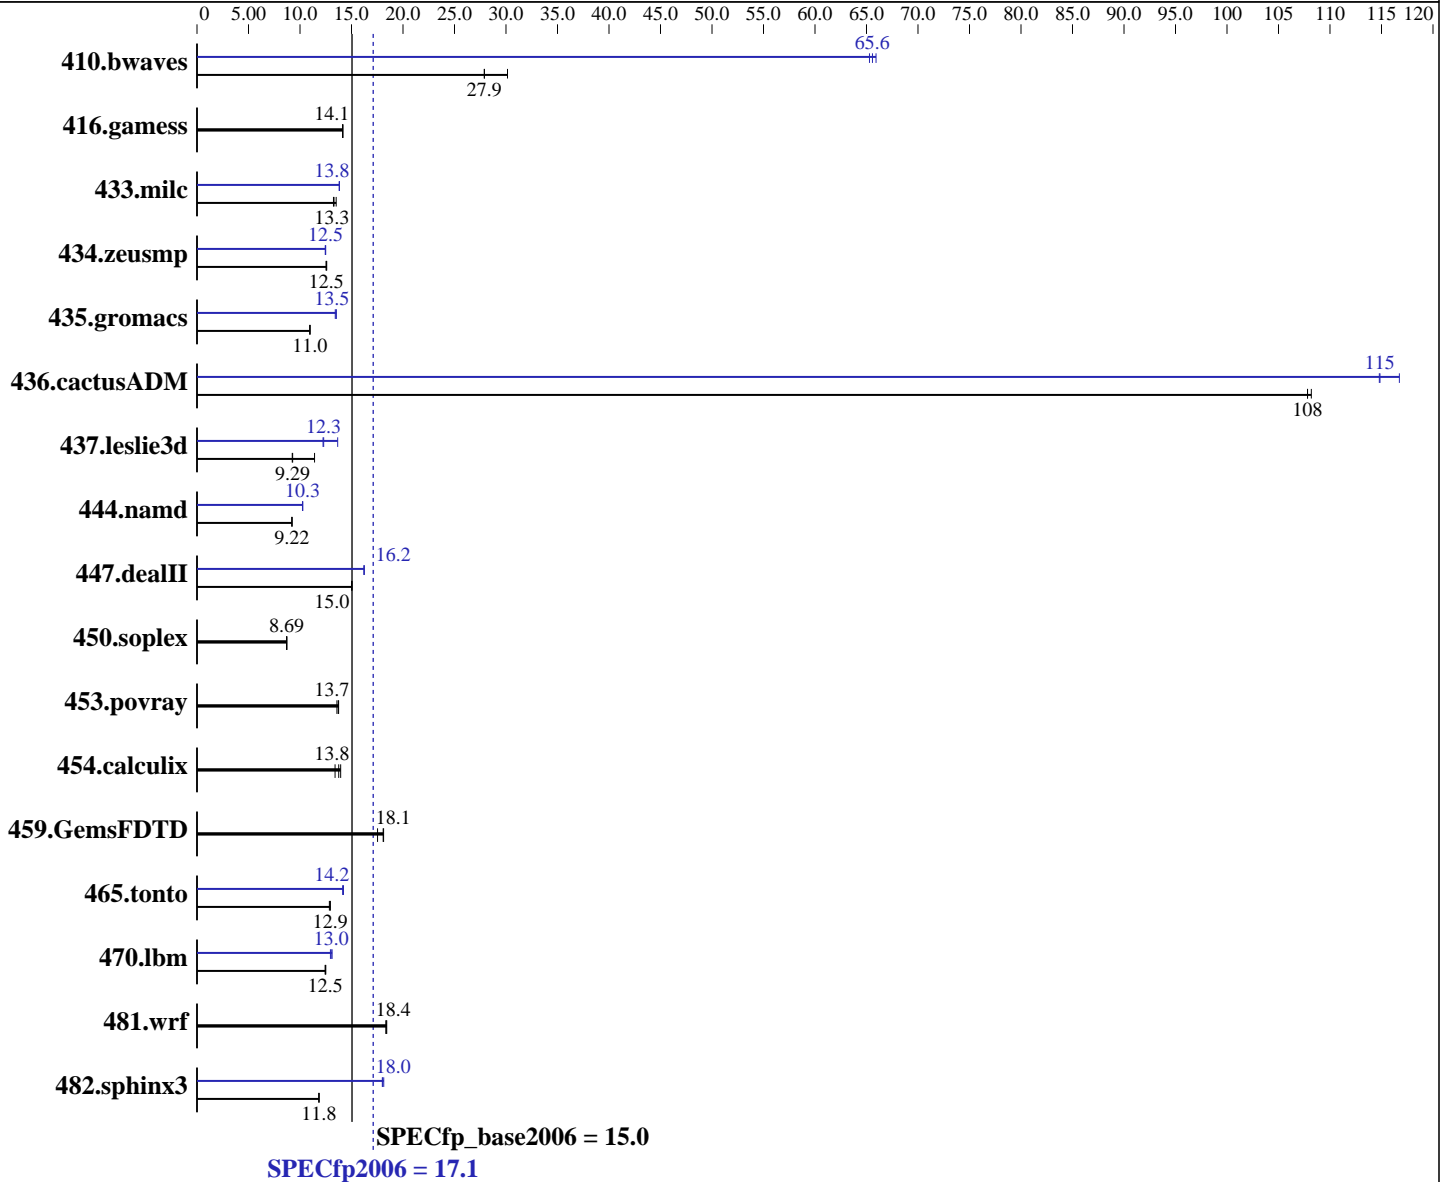

Hardware

CPU Name: AMD Opteron 8356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 2,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 64-bit
 Other Software: binutils-2.18.50

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.1

ProLiant BL685c G5
(2.3 GHz AMD Opteron 8356)

SPECfp_base2006 = 15.0

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4 GB, PC2-5300P CL5)
Disk Subsystem: 1x146 GB 10 K SAS
Other Hardware: None

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	487	27.9	451	30.1	487	27.9	<u>207</u>	65.6	208	65.3	206	65.9
416.gamess	1382	14.2	1386	14.1	1384	14.1	1382	14.2	1386	14.1	1384	14.1
433.milc	693	13.2	679	13.5	690	13.3	664	13.8	664	13.8	664	13.8
434.zeusmp	725	12.5	723	12.6	726	12.5	729	12.5	731	12.5	728	12.5
435.gromacs	650	11.0	652	10.9	651	11.0	529	13.5	532	13.4	528	13.5
436.cactusADM	111	108	111	108	110	108	104	115	102	117	104	115
437.leslie3d	1012	9.29	824	11.4	1017	9.25	768	12.2	764	12.3	688	13.7
444.namd	869	9.23	870	9.22	870	9.21	782	10.3	783	10.2	781	10.3
447.dealII	762	15.0	762	15.0	760	15.1	705	16.2	705	16.2	705	16.2
450.soplex	960	8.69	954	8.74	959	8.69	960	8.69	954	8.74	959	8.69
453.povray	388	13.7	387	13.7	392	13.6	388	13.7	387	13.7	392	13.6
454.calculix	600	13.8	615	13.4	591	13.9	600	13.8	615	13.4	591	13.9
459.GemsFDTD	605	17.5	586	18.1	587	18.1	605	17.5	586	18.1	587	18.1
465.tonto	761	12.9	761	12.9	766	12.9	694	14.2	692	14.2	695	14.2
470.lbm	1104	12.4	1103	12.5	1099	12.5	1061	13.0	1055	13.0	1047	13.1
481.wrf	606	18.4	608	18.4	609	18.3	606	18.4	608	18.4	609	18.3
482.sphinx3	1647	11.8	1644	11.9	1647	11.8	1081	18.0	1075	18.1	1083	18.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
PGI_HUGE_PAGES set to 896
Total number of huge pages available is 14336
NCPUS set to number of cores
numactl used to bind processes to CPUs

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.1

ProLiant BL685c G5
(2.3 GHz AMD Opteron 8356)

SPECfp_base2006 = 15.0

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mconcur
-Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:896 --zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mconcur
-Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.1

ProLiant BL685c G5
(2.3 GHz AMD Opteron 8356)

SPECfp_base2006 = 15.0

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

-fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed -Mconcur
-Msmartalloc=huge:896 -tp barcelona-64 -Bstatic_pgi

Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Peak Portability Flags

Same as Base Portability Flags

Peak Optimization Flags

C benchmarks:

433.milc: -fastsse -Msmartalloc=huge:896 -Mconcur -Msafepr
-Mfprelaxed -Mipa=jobs:8 -Mipa=inline -Mipa=arg
-Mipa=const -Mipa=ptr -Mipa=shape -tp barcelona-64

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 4



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.1

ProLiant BL685c G5
(2.3 GHz AMD Opteron 8356)

SPECfp_base2006 = 15.0

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

433.milc (continued):

-Bstatic_pgi

470.lbm: -fastsse -Mfprelaxed -Msmartalloc=huge:896 -Mipa=fast

-Mipa=inline -Mipa=noarg -Mprefetch=distance:12

-Mprefetch=nta -tp barcelona-64 -Bstatic_pgi

482.sphinx3: -Mphi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)

-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed

-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta

-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mipa=jobs:8(pass 2) -Mipa=fast(pass 2)

-Mipa=inline(pass 2) -Mconcur=noaltcode(pass 2)

-Mpfo(pass 2) -fast -Mfprelaxed -Msmartalloc=huge:896

--zc_eh -Mnodepchk -Munroll=n:4 -Munroll=m:8

-tp barcelona-64 -Bstatic_pgi

447.dealII: -fast -Mfprelaxed -Msmartalloc=huge:896 --zc_eh -Mnovect

-alias=ansi -Mipa=jobs:8 -Mipa=fast -Mipa=inline

-tp barcelona-64 -Bstatic_pgi

450.soplex: basepeak = yes

453.povray: basepeak = yes

Fortran benchmarks:

410.bwaves: -fastsse -Mloop32 -Mfprelaxed -Msmartalloc

-Mprefetch=distance:12 -Mprefetch=nta -Mconcur -Mipa=jobs:8

-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

416.gamess: basepeak = yes

434.zeusmp: -fast -Mloop32 -Mipa=jobs:8 -Mipa=fast -Mipa=inline

-Mfprelaxed -Mconcur -Msmartalloc -tp barcelona-64

-Bstatic_pgi

437.leslie3d: -fast -Mipa=jobs:8 -Mipa=fast -Mipa=inline -Mfprelaxed

-Mconcur=noaltcode -Msmartalloc=huge:896 -tp barcelona-64

-Bstatic_pgi

459.GemsFDTD: basepeak = yes

465.tonto: -fast -O4 -Mfprelaxed -Msmartalloc=huge:896

-Mprefetch=distance:8 -Mipa=jobs:8 -Mipa=fast -Mipa=inline

-Mvect=noaltcode -tp barcelona-64 -Bstatic_pgi

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/

Page 5



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 17.1

ProLiant BL685c G5
(2.3 GHz AMD Opteron 8356)

SPECfp_base2006 = 15.0

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mconcur -Mfpapprox=rsqrt -Mipa=jobs:8 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:896
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -fastsse -Mfprelaxed -Mconcur -Msmartalloc -Mdse
-Mipa=jobs:8 -Mipa=fast -Mipa=inline -tp barcelona-64
-Bstatic_pgi

454.calculix: basepeak = yes

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 17:50:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 April 2008.