



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®_rate2006 = 45.2

ProLiant BL465c G5
(2.3 GHz AMD Opteron 2356)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3


Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

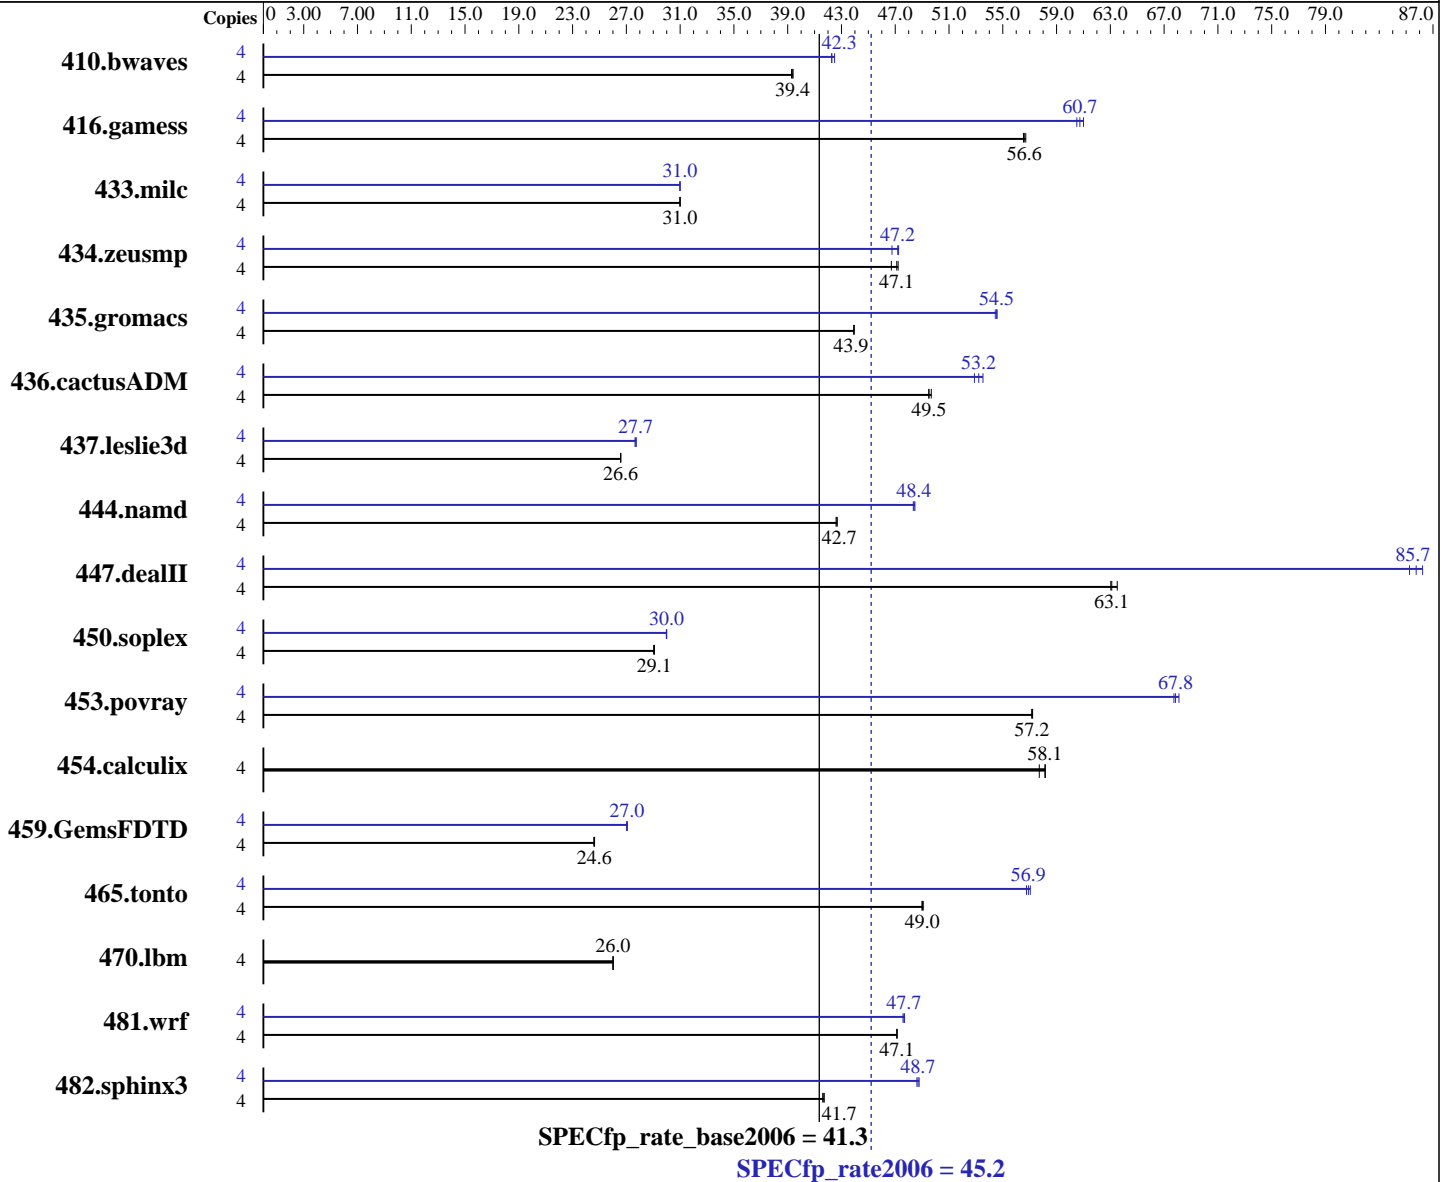

Hardware

CPU Name: AMD Opteron 2356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2, PathScale Compiler Suite, Release Pre-3.2 Beta
 Auto Parallel: No
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.2

ProLiant BL465c G5
(2.3 GHz AMD Opteron 2356)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 16 GB (4x4 GB, PC2-5300P CL5)
Disk Subsystem: 1x146 GB 10 K SAS
Other Hardware: None

Other Software: binutils-2.18.50

Results Table

| Benchmark | Base | | | | | | | Peak | | | | | | |
|---------------|--------|-------------|-------------|------------|-------------|-------------|-------------|--------|-------------|-------------|-------------|-------------|-------------|-------------|
| | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio | Copies | Seconds | Ratio | Seconds | Ratio | Seconds | Ratio |
| 410.bwaves | 4 | 1384 | 39.3 | 1380 | 39.4 | 1380 | 39.4 | 4 | 1279 | 42.5 | 1286 | 42.3 | 1286 | 42.3 |
| 416.gamess | 4 | 1384 | 56.6 | 1385 | 56.5 | 1381 | 56.7 | 4 | 1290 | 60.7 | 1284 | 61.0 | 1294 | 60.5 |
| 433.milc | 4 | 1185 | 31.0 | 1185 | 31.0 | 1185 | 31.0 | 4 | 1185 | 31.0 | 1185 | 31.0 | 1185 | 31.0 |
| 434.zeusmp | 4 | 779 | 46.7 | 773 | 47.1 | 771 | 47.2 | 4 | 770 | 47.3 | 771 | 47.2 | 778 | 46.8 |
| 435.gromacs | 4 | 650 | 43.9 | 650 | 43.9 | 650 | 43.9 | 4 | 524 | 54.5 | 523 | 54.6 | 525 | 54.4 |
| 436.cactusADM | 4 | 962 | 49.7 | 966 | 49.5 | 965 | 49.5 | 4 | 898 | 53.2 | 904 | 52.9 | 893 | 53.5 |
| 437.leslie3d | 4 | 1415 | 26.6 | 1415 | 26.6 | 1415 | 26.6 | 4 | 1357 | 27.7 | 1356 | 27.7 | 1360 | 27.6 |
| 444.namd | 4 | 752 | 42.7 | 753 | 42.6 | 752 | 42.7 | 4 | 664 | 48.3 | 663 | 48.4 | 662 | 48.5 |
| 447.dealII | 4 | 725 | 63.1 | 726 | 63.0 | 720 | 63.5 | 4 | 534 | 85.7 | 537 | 85.3 | 531 | 86.2 |
| 450.soplex | 4 | 1147 | 29.1 | 1147 | 29.1 | 1149 | 29.0 | 4 | 1113 | 30.0 | 1112 | 30.0 | 1112 | 30.0 |
| 453.povray | 4 | 372 | 57.2 | 372 | 57.2 | 372 | 57.2 | 4 | 314 | 67.7 | 312 | 68.1 | 314 | 67.8 |
| 454.calculix | 4 | 568 | 58.1 | 572 | 57.7 | 567 | 58.2 | 4 | 568 | 58.1 | 572 | 57.7 | 567 | 58.2 |
| 459.GemsFDTD | 4 | 1723 | 24.6 | 1727 | 24.6 | 1724 | 24.6 | 4 | 1568 | 27.1 | 1570 | 27.0 | 1570 | 27.0 |
| 465.tonto | 4 | 803 | 49.0 | 803 | 49.0 | 802 | 49.1 | 4 | 692 | 56.9 | 690 | 57.0 | 693 | 56.8 |
| 470.lbm | 4 | 2113 | 26.0 | 2113 | 26.0 | 2112 | 26.0 | 4 | 2113 | 26.0 | 2113 | 26.0 | 2112 | 26.0 |
| 481.wrf | 4 | 948 | 47.1 | 948 | 47.1 | 948 | 47.1 | 4 | 939 | 47.6 | 938 | 47.7 | 937 | 47.7 |
| 482.sphinx3 | 4 | 1870 | 41.7 | 1869 | 41.7 | 1874 | 41.6 | 4 | 1601 | 48.7 | 1604 | 48.6 | 1598 | 48.8 |

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 3584.
NCPUS set to number of cores
numactl used to bind processes to CPUs

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.2

ProLiant BL465c G5
(2.3 GHz AMD Opteron 2356)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -Mnomain
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 450.soplex: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi

Fortran benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.2

ProLiant BL465c G5
(2.3 GHz AMD Opteron 2356)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-w
```

C++ benchmarks:

```
-w
```

Fortran benchmarks:

```
-w
```

Benchmarks using both Fortran and C:

```
-w
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
pgcc
```

```
482.sphinx3: pathcc
```

C++ benchmarks (except as noted below):

```
pathCC
```

```
444.namd: pgcpp
```

Fortran benchmarks (except as noted below):

```
pathf95
```

```
410.bwaves: pgf95
```

```
434.zeusmp: pgf95
```

Benchmarks using both Fortran and C (except as noted below):

```
pgcc pgf95
```

```
436.cactusADM: pathcc pathf95
```

```
481.wrf: pathcc pathf95
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.2

ProLiant BL465c G5
(2.3 GHz AMD Opteron 2356)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
-Mipa=shape -tp barcelona-64 -Bstatic_pgi

```

```

470.lbm: basepeak = yes

```

```

482.sphinx3: -march=barcelona -Ofast -LNO:vintr=2
-CG:locs_shallow_depth=1

```

C++ benchmarks:

```

444.namd: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
-Munroll=m:8 -tp barcelona-64 -Bstatic_pgi

```

```

447.deallI: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions

```

```

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1 -OPT:malloc_alg=1 -CG:load_exe=0

```

```

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast

```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.2

ProLiant BL465c G5
(2.3 GHz AMD Opteron 2356)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Optimization Flags (Continued)

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnw -OPT:unroll_size=256
-CG:load_exe=0

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -LNO:blocking=off

454.calculix: basepeak = yes

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -m3dnw -LANG:copyinout=off
-IPA:callee_limit=5000

Peak Other Flags

C benchmarks (except as noted below):

-w

482.sphinx3: No flags used

C++ benchmarks:

444.namd: -w

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 45.2

ProLiant BL465c G5
(2.3 GHz AMD Opteron 2356)

SPECfp_rate_base2006 = 41.3

CPU2006 license: 3

Test date: Mar-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2008

Tested by: Hewlett-Packard Company

Software Availability: May-2008

Peak Other Flags (Continued)

Fortran benchmarks:

410.bwaves: -w

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/hp-PGI72-PS32-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Jul 22 17:50:15 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 April 2008.