



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp®\_rate2006 = 147**

PowerEdge R905 (AMD Opteron 8354, 2.20 GHz)

**SPECfp\_rate\_base2006 = 135**

CPU2006 license: 55


Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

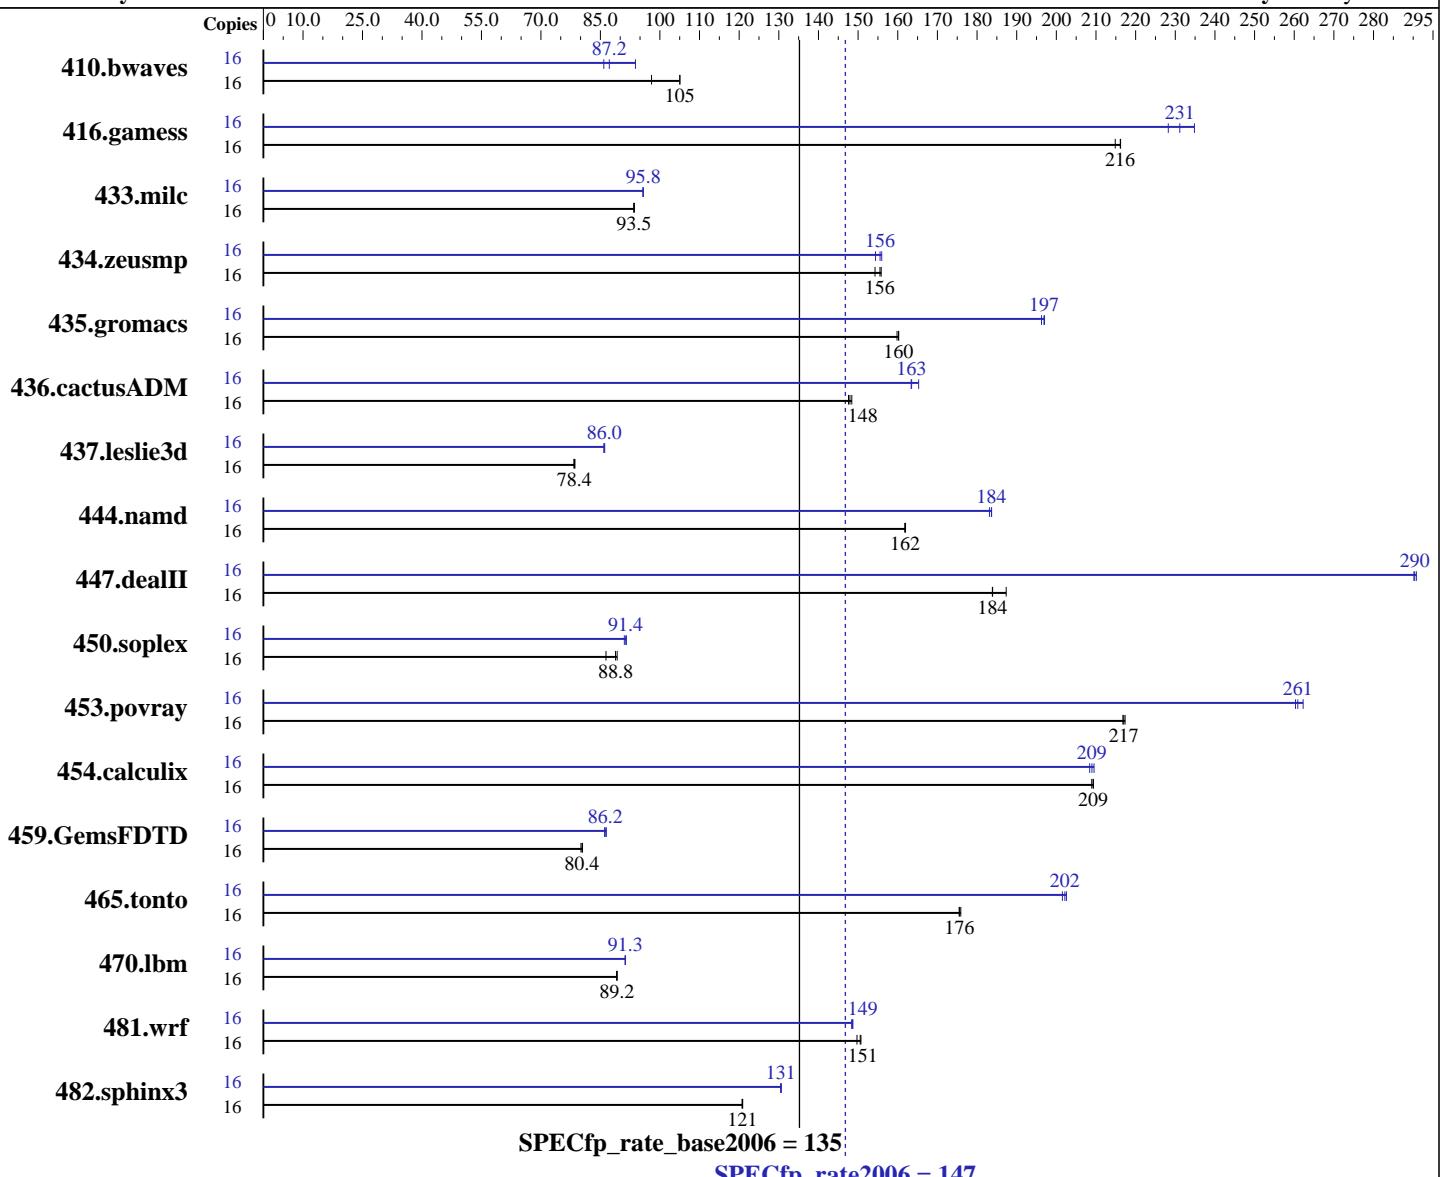

## Hardware

CPU Name: AMD Opteron 8354  
CPU Characteristics:  
CPU MHz:  
FPU:  
CPU(s) enabled:  
CPU(s) orderable:  
Primary Cache:  
Secondary Cache:

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
Auto Parallel: No  
File System: ReiserFS  
System State: Run Level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 147**

PowerEdge R905 (AMD Opteron 8354, 2.20 GHz)

**SPECfp\_rate\_base2006 = 135**

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (16 x 2GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: 2 x 73 GB 10000 RPM SAS (RAID 0)  
 Other Hardware: None

Other Software: None

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	16	2221	97.9	<b>2070</b>	<b>105</b>	2070	105	16	2317	93.9	2532	85.9	<b>2492</b>	<b>87.2</b>
416.gamess	16	<b>1449</b>	<b>216</b>	1449	216	1458	215	16	1334	235	<b>1355</b>	<b>231</b>	1373	228
433.milc	16	<b>1571</b>	<b>93.5</b>	1572	93.4	1570	93.6	16	<b>1533</b>	<b>95.8</b>	1534	95.8	1533	95.8
434.zeusmp	16	944	154	<b>936</b>	<b>156</b>	934	156	16	943	154	934	156	<b>936</b>	<b>156</b>
435.gromacs	16	<b>713</b>	<b>160</b>	713	160	715	160	16	<b>580</b>	<b>197</b>	580	197	582	196
436.cactusADM	16	<b>1292</b>	<b>148</b>	1296	148	1288	148	16	1157	165	<b>1169</b>	<b>163</b>	1170	163
437.leslie3d	16	1920	78.3	1914	78.6	<b>1917</b>	<b>78.4</b>	16	<b>1749</b>	<b>86.0</b>	1751	85.9	1747	86.1
444.namd	16	793	162	792	162	<b>793</b>	<b>162</b>	16	701	183	<b>699</b>	<b>184</b>	699	184
447.dealII	16	996	184	<b>995</b>	<b>184</b>	977	187	16	631	290	629	291	<b>630</b>	<b>290</b>
450.soplex	16	<b>1502</b>	<b>88.8</b>	1495	89.2	1544	86.4	16	1466	91.0	1457	91.6	<b>1460</b>	<b>91.4</b>
453.povray	16	<b>392</b>	<b>217</b>	392	217	393	217	16	<b>326</b>	<b>261</b>	327	260	325	262
454.calculix	16	632	209	<b>631</b>	<b>209</b>	631	209	16	<b>632</b>	<b>209</b>	630	210	633	208
459.GemsFDTD	16	2119	80.1	2109	80.5	<b>2112</b>	<b>80.4</b>	16	<b>1969</b>	<b>86.2</b>	1962	86.5	1973	86.1
465.tonto	16	895	176	897	175	<b>897</b>	<b>176</b>	16	<b>779</b>	<b>202</b>	781	202	777	203
470.lbm	16	2464	89.2	2467	89.1	<b>2465</b>	<b>89.2</b>	16	2408	91.3	<b>2408</b>	<b>91.3</b>	2408	91.3
481.wrf	16	1194	150	<b>1187</b>	<b>151</b>	1186	151	16	1205	148	<b>1203</b>	<b>149</b>	1202	149
482.sphinx3	16	2583	121	<b>2581</b>	<b>121</b>	2579	121	16	2390	130	<b>2389</b>	<b>131</b>	2387	131

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'numactl' was used to bind copies to the cores

Environment variable PGI\_HUGE\_PAGES set to 150

'ulimit -s unlimited' was used to set environment stack size

'ulimit -l 4915200' was used to set environment locked pages in memory quantity

Set vm/nr\_hugepages=2400 in /etc/sysctl.conf

mount -t hugetlbfs nodev /mnt/hugepages

## Base Compiler Invocation

C benchmarks:

pgcc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

**SPECfp\_rate2006 = 147**

PowerEdge R905 (AMD Opteron 8354, 2.20 GHz)

**SPECfp\_rate\_base2006 = 135**

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
    454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
```

C++ benchmarks:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi
```

Fortran benchmarks:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
```

Benchmarks using both Fortran and C:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
```



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8354, 2.20 GHz)

**SPECfp\_rate2006 = 147**

CPU2006 license: 55

Test sponsor: Dell Inc.

Tested by: Dell Inc.

Test date: Mar-2008

Hardware Availability: Apr-2008

Software Availability: May-2008

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

Fortran benchmarks:

-w

Benchmarks using both Fortran and C:

-w

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

433.milc: pgcc

C++ benchmarks (except as noted below):

pathCC

444.namd: pgcpp

Fortran benchmarks (except as noted below):

pathf95

410.bwaves: pgf95

434.zeusmp: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

436.cactusADM: pathcc pathf95

481.wrf: pathcc pathf95

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64

416.gamess: -DSPEC\_CPU\_LP64

433.milc: -DSPEC\_CPU\_LP64

434.zeusmp: -DSPEC\_CPU\_LP64

435.gromacs: -DSPEC\_CPU\_LP64 -Mnomain

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8354, 2.20 GHz)

**SPECfp\_rate2006 = 147**

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Portability Flags (Continued)

```

436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
  444.namd: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
  454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64

```

## Peak Optimization Flags

C benchmarks:

```

433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
  -Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
  -Mipa=shape -tp barcelona-64 -Bstatic_pgi
470.lbm: -march=barcelona -Ofast -m3dnow
482.sphinx3: -march=barcelona -Ofast

```

C++ benchmarks:

```

444.namd: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
  -Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
  -Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
  -Munroll=m:8 -tp barcelona-64 -Bstatic_pgi
447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
  -OPT:malloc_alg=1 -m32 -fno-exceptions
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
  -LNO:prefetch=1
453.povray: -march=barcelona -fb_create fbdata(pass 1)
  -fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0

```

Fortran benchmarks:

```

410.bwaves: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
  -Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
  -Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
  -tp barcelona-64 -Bstatic_pgi

```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8354, 2.20 GHz)

**SPECfp\_rate2006 = 147**

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

```
416.gamess: -march=barcelona -fb_create fbdata(pass 1)
             -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
             -OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartralloc=huge:150 -Mipa=jobs:4
             -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll_size=256
               -CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
                -OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
             -OPT:alias=no_f90_pointer_alias -LNO:blocking=off
             -CG:load_exe=1 -IPA:plimit=525
```

Benchmarks using both Fortran and C:

```
435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast
              -Mipa=inline -Mfpredaxed -Msmartralloc=huge:150
              -tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
                 -fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfpredaxed -Msmartralloc=huge:150 -Mipa=jobs:4
                -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
           -LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnow
           -LANG:copyinout=off -IPA:callee_limit=5000
```

## Peak Other Flags

C benchmarks:

433.milc: -w

C++ benchmarks:

444.namd: -w

Fortran benchmarks:

410.bwaves: -w

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

PowerEdge R905 (AMD Opteron 8354, 2.20 GHz)

**SPECfp\_rate2006 = 147**

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Other Flags (Continued)

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.

Report generated on Tue Jul 22 18:07:47 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 7 May 2008.