



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 97.5

PowerEdge T605 (AMD Opteron 2354, 2.20 GHz)

SPECint\_rate\_base2006 = 84.6

CPU2006 license: 55


Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

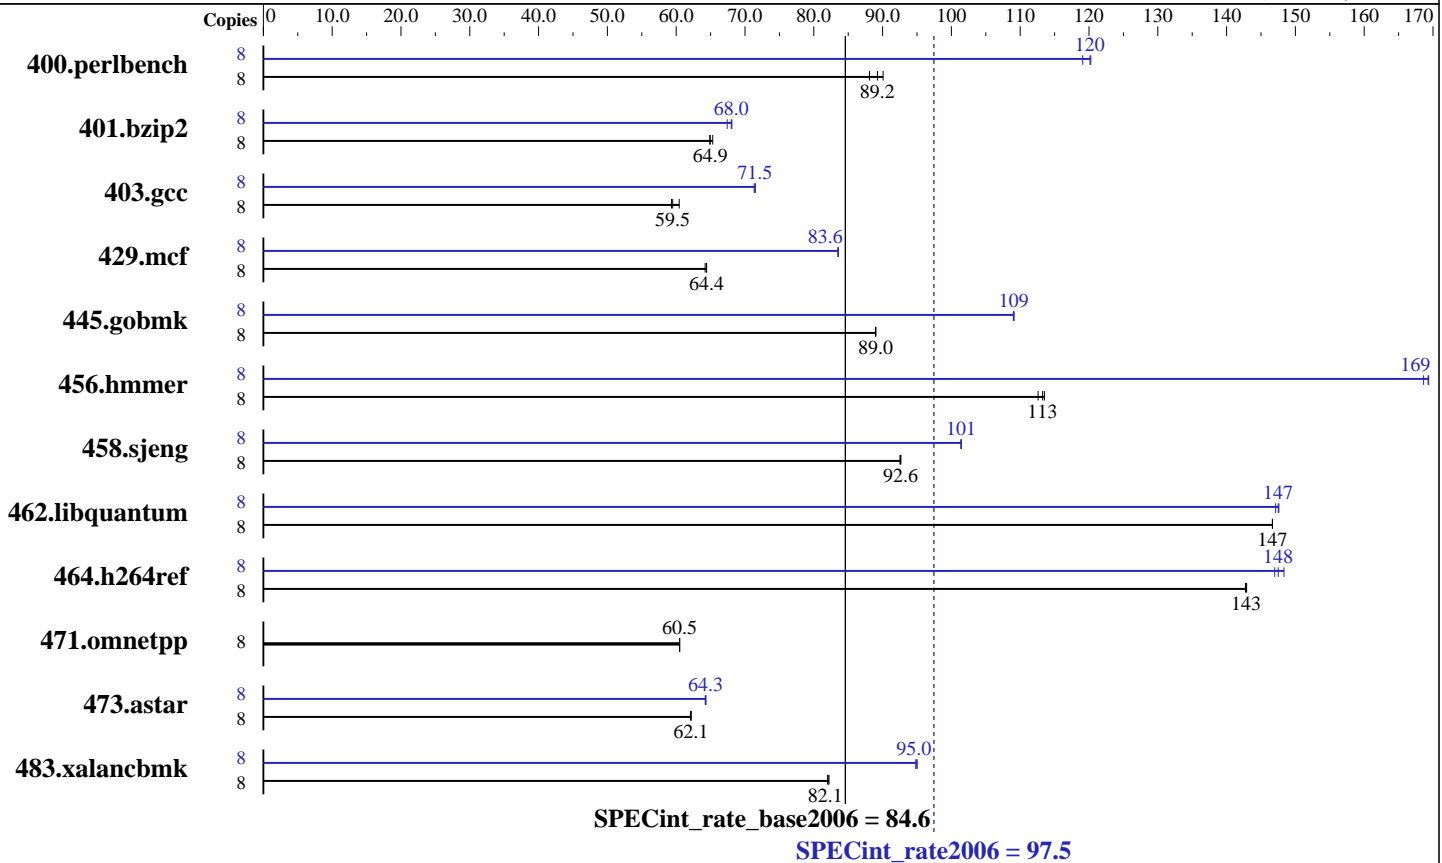

## Hardware

CPU Name: AMD Opteron 2354  
 CPU Characteristics: 2200  
 CPU MHz: 2200  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 2 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 16 GB (4 x 4 GB, DDR2-667, CL5, Reg, Dual Rank)  
 Disk Subsystem: 2 x 250 GB 7200 RPM SATA (RAID 0)  
 Other Hardware: None

## Software

Operating System: SuSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run Level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: SmartHeap 8.0 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 97.5

PowerEdge T605 (AMD Opteron 2354, 2.20 GHz)

SPECint\_rate\_base2006 = 84.6

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>876</b>	<b>89.2</b>	868	90.1	887	88.1	8	656	119	650	120	<b>651</b>	<b>120</b>
401.bzip2	8	1182	65.3	1190	64.9	<b>1189</b>	<b>64.9</b>	8	1145	67.4	<b>1135</b>	<b>68.0</b>	1134	68.1
403.gcc	8	1066	60.4	1086	59.3	<b>1082</b>	<b>59.5</b>	8	901	71.5	<b>901</b>	<b>71.5</b>	903	71.3
429.mcf	8	1136	64.2	1133	64.4	<b>1133</b>	<b>64.4</b>	8	874	83.5	873	83.6	<b>873</b>	<b>83.6</b>
445.gobmk	8	943	89.0	<b>943</b>	<b>89.0</b>	943	89.0	8	<b>769</b>	<b>109</b>	769	109	770	109
456.hmmer	8	658	114	663	113	<b>659</b>	<b>113</b>	8	443	169	<b>441</b>	<b>169</b>	441	169
458.sjeng	8	<b>1045</b>	<b>92.6</b>	1045	92.6	1046	92.5	8	954	101	<b>954</b>	<b>101</b>	955	101
462.libquantum	8	1130	147	<b>1130</b>	<b>147</b>	1130	147	8	1127	147	1123	148	<b>1124</b>	<b>147</b>
464.h264ref	8	<b>1239</b>	<b>143</b>	1240	143	1239	143	8	1193	148	1204	147	<b>1200</b>	<b>148</b>
471.omnetpp	8	826	60.5	827	60.5	<b>826</b>	<b>60.5</b>	8	826	60.5	827	60.5	<b>826</b>	<b>60.5</b>
473.astar	8	<b>904</b>	<b>62.1</b>	904	62.1	903	62.2	8	875	64.2	873	64.3	<b>873</b>	<b>64.3</b>
483.xalancbmk	8	<b>672</b>	<b>82.1</b>	671	82.2	673	82.0	8	581	95.0	<b>581</b>	<b>95.0</b>	582	94.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2457600' was used to set environment locked pages in memory quantity
Set /proc/sys/vm/nr_hugepages=1200
mount -t hugetlbfs nodev /mnt/hugepages
```

## Base Compiler Invocation

C benchmarks:  
pgcc

C++ benchmarks:  
pgcpp

## Base Portability Flags

```
400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
```

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 97.5

PowerEdge T605 (AMD Opteron 2354, 2.20 GHz)

SPECint\_rate\_base2006 = 84.6

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Base Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic\_pgi

C++ benchmarks:

-fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 --zc\_eh -tp barcelona -Bstatic\_pgi

## Base Other Flags

C benchmarks:

-w

C++ benchmarks:

-w

## Peak Compiler Invocation

C benchmarks (except as noted below):

pgcc

400.perlbench: pathcc

403.gcc: pathcc

445.gobmk: pathcc

C++ benchmarks (except as noted below):

pathCC

471.omnetpp: pgcpp



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 97.5

PowerEdge T605 (AMD Opteron 2354, 2.20 GHz)

SPECint\_rate\_base2006 = 84.6

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 483.xalanbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -Ofast -IPA:plimit=20000 -LNO:opt=0  
 -WOPT:if\_conv=0 -CG:local\_sched\_alg=1

401.bzip2: -Mpfi(pass 1) -Mpfo(pass 2) -fast -O4  
 -Msmartalloc=huge:150 -Mnounroll -tp barcelona-64  
 -Bstatic\_pgi

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -m32 -O3 -OPT:Ofast

429.mcf: -fastsse -Mipa=jobs:4 -Mipa=fast -Mipa=inline:1  
 -Msmartalloc=huge:150 -tp barcelona -Bstatic\_pgi

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
 -fb\_opt fbdata(pass 2) -O3 -OPT:alias=restrict -LNO:opt=0  
 -CG:p2align=on

456.hmmer: -fastsse -Munroll=n:8 -Msmartalloc=huge:150 -Mfprelaxed  
 -Mvect=partial -Msafeptr -Mipa=jobs:4 -Mipa=const  
 -Mipa=ptr -Mipa=arg -Mipa=inline -tp barcelona-64  
 -Bstatic\_pgi

458.sjeng: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)  
 -Mipa=inline:1(pass 2) -Mipa=noarg(pass 2) -Mpfo(pass 2)  
 -fastsse -Msmartalloc=huge:150 -Mfprelaxed  
 -tp barcelona-64 -Bstatic\_pgi

462.libquantum: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Munroll=m:8  
 -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mipa=noarg  
 -tp barcelona-64 -Bstatic\_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mipa=jobs:4(pass 2)  
 -Mipa=fast(pass 2) -Mipa=inline(pass 2)  
 -Mpfo=indirect(pass 2) -fastsse -Msmartalloc=huge:150  
 -Mfprelaxed -tp barcelona-64 -Bstatic\_pgi

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 97.5

PowerEdge T605 (AMD Opteron 2354, 2.20 GHz)

SPECint\_rate\_base2006 = 84.6

CPU2006 license: 55

Test date: Mar-2008

Test sponsor: Dell Inc.

Hardware Availability: Apr-2008

Tested by: Dell Inc.

Software Availability: May-2008

## Peak Optimization Flags (Continued)

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -march=barcelona -Ofast -TENV:frame\_pointer=off  
-WOPT:if\_conv=0 -GRA:optimize\_boundary=on -IPA:plimit=525  
-m32 -lsmartheap

483.xalancbmk: -march=barcelona -Ofast -m32 -OPT:unroll\_times\_max=8  
-CG:push\_pop\_int\_saved\_regs=off -CG:ptr\_load\_use=0  
-lsmartheap

## Peak Other Flags

C benchmarks (except as noted below):

-w

400.perlbench: No flags used

403.gcc: No flags used

445.gobmk: No flags used

C++ benchmarks (except as noted below):

-L/root/work/cpu2006/amd123GH.libs/32

471.omnetpp: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090714.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 16:49:09 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 29 April 2008.