



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Itautec

### SPECfp®\_rate2006 = 73.2

### Servidor Itautec MX221 (Intel Xeon E5430)

### SPECfp\_rate\_base2006 = 66.2

CPU2006 license: 9001


Test date: May-2008

Test sponsor: Itautec

Hardware Availability: Dec-2007

Tested by: Itautec

Software Availability: Jan-2008

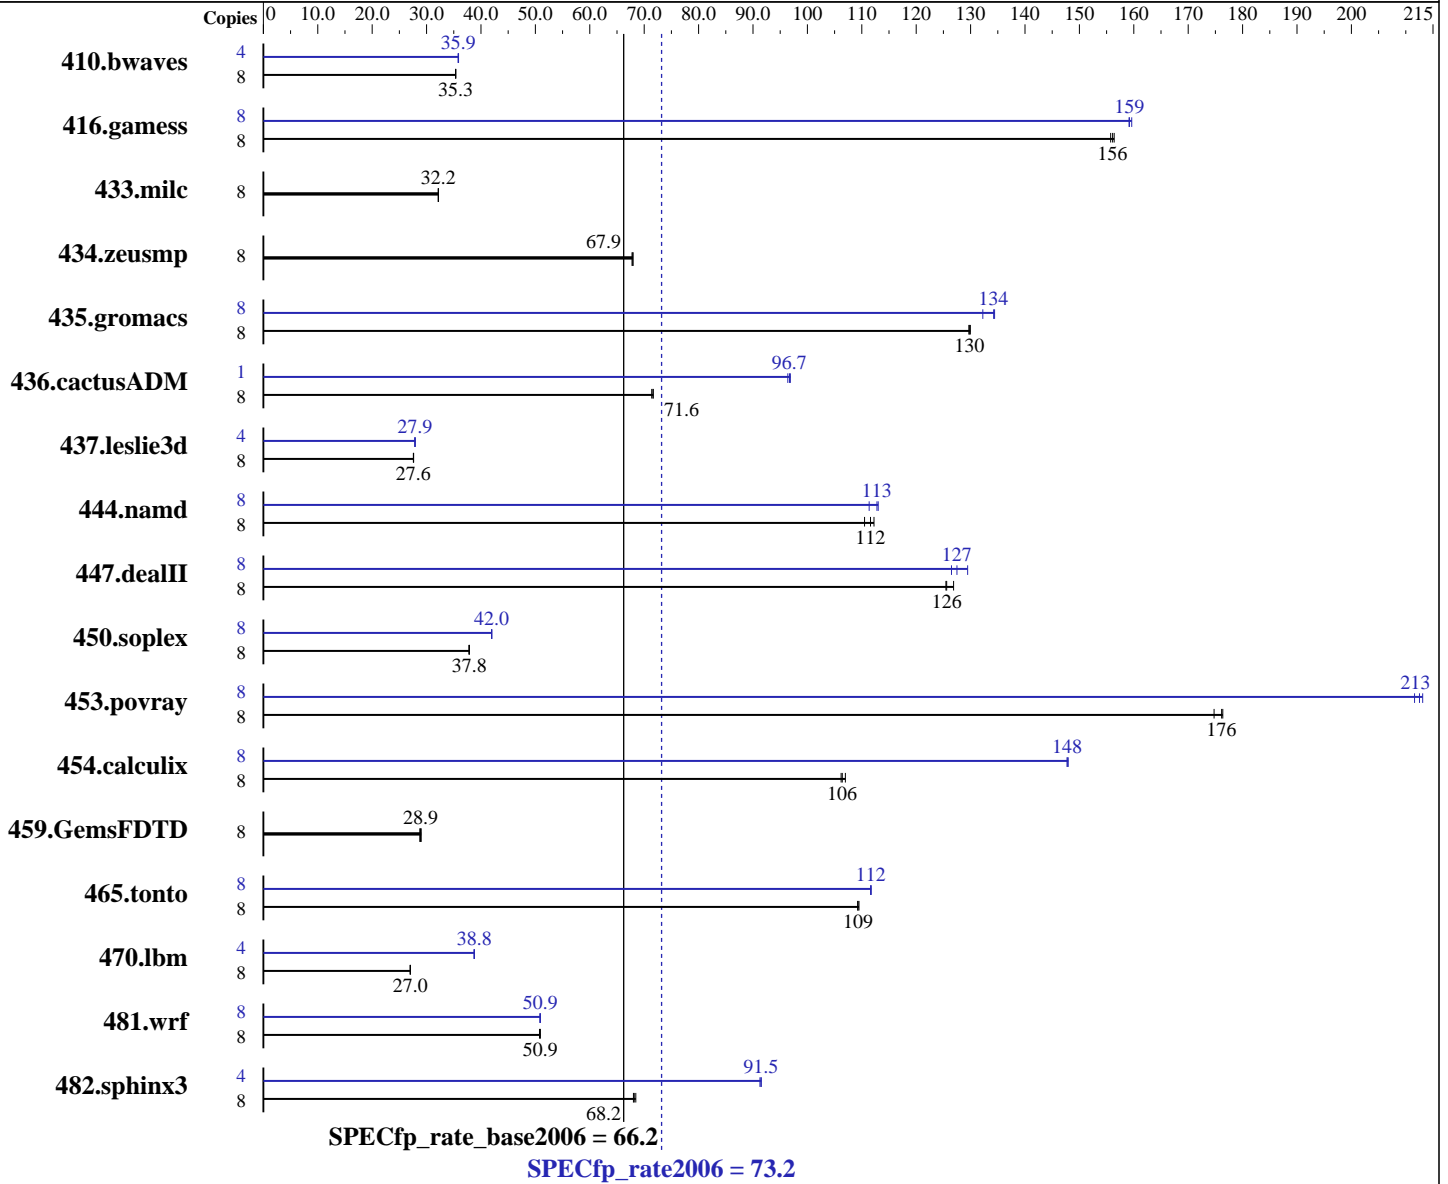

### Hardware

CPU Name: Intel Xeon E5430  
 CPU Characteristics: 2660  
 CPU MHz: Integrated  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler for Linux version 10.1 Build 20080112 Package ID: l\_cc\_p\_10.1.012, l\_fc\_p\_10.1.012  
 Auto Parallel: Yes  
 File System: ReiserFS  
 System State: Run Level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 73.2

Servidor Itaotec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 66.2

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8 \* 2 GB PC2-5300 FBDIMM, CL-5-5-5, ECC)  
Disk Subsystem: 1 x SCSI, 73GB, 15000 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: Binutils 2.17.10.50

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3076	35.3	3075	35.4	<b>3076</b>	<b>35.3</b>	4	1515	35.9	1519	35.8	<b>1516</b>	<b>35.9</b>
416.gamess	8	1002	156	<b>1003</b>	<b>156</b>	1006	156	8	981	160	<b>984</b>	<b>159</b>	984	159
433.milc	8	2285	32.1	<b>2284</b>	<b>32.2</b>	2281	32.2	8	2285	32.1	<b>2284</b>	<b>32.2</b>	2281	32.2
434.zeusmp	8	<b>1072</b>	<b>67.9</b>	1071	67.9	1074	67.8	8	<b>1072</b>	<b>67.9</b>	1071	67.9	1074	67.8
435.gromacs	8	440	130	<b>440</b>	<b>130</b>	440	130	8	<b>426</b>	<b>134</b>	425	134	432	132
436.cactusADM	8	1339	71.4	<b>1335</b>	<b>71.6</b>	1334	71.7	1	123	96.9	<b>124</b>	<b>96.7</b>	124	96.4
437.leslie3d	8	2727	27.6	<b>2726</b>	<b>27.6</b>	2722	27.6	4	1352	27.8	<b>1350</b>	<b>27.9</b>	1346	27.9
444.namd	8	581	111	<b>575</b>	<b>112</b>	572	112	8	<b>569</b>	<b>113</b>	568	113	576	111
447.dealII	8	721	127	729	125	<b>729</b>	<b>126</b>	8	707	129	<b>718</b>	<b>127</b>	724	126
450.soplex	8	1766	37.8	1762	37.9	<b>1763</b>	<b>37.8</b>	8	1590	42.0	1589	42.0	<b>1590</b>	<b>42.0</b>
453.povray	8	<b>242</b>	<b>176</b>	244	175	241	176	8	<b>200</b>	<b>213</b>	201	212	200	213
454.calculix	8	621	106	617	107	<b>620</b>	<b>106</b>	8	<b>447</b>	<b>148</b>	446	148	447	148
459.GemsFDTD	8	2952	28.7	<b>2939</b>	<b>28.9</b>	2926	29.0	8	2952	28.7	<b>2939</b>	<b>28.9</b>	2926	29.0
465.tonto	8	719	109	721	109	<b>720</b>	<b>109</b>	8	705	112	<b>705</b>	<b>112</b>	705	112
470.lbm	8	4071	27.0	4070	27.0	<b>4070</b>	<b>27.0</b>	4	1416	38.8	<b>1418</b>	<b>38.8</b>	1419	38.7
481.wrf	8	1761	50.8	<b>1756</b>	<b>50.9</b>	1756	50.9	8	1755	50.9	<b>1756</b>	<b>50.9</b>	1758	50.8
482.sphinx3	8	<b>2287</b>	<b>68.2</b>	2277	68.5	2292	68.0	4	854	91.3	<b>852</b>	<b>91.5</b>	852	91.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Compiler Invocation Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_STACK\_SIZE set to 64M  
KMP\_AFFINITY set to physical,0

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run.  
'/usr/bin/taskset' is used to bind benchmark copies to processor, except for 436.cactusADM at peak.



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 73.2

Servidor Itaotec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 66.2

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Platform Notes

BIOS configuration:  
Hardware Prefetch Disabled

## General Notes

This result was measured on the Servidor Itaotec MX201.  
The Servidor Itaotec MX221 and the Servidor Itaotec MX201 are electronically equivalent.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 73.2

Servidor Itautec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 66.2

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Base Optimization Flags

C benchmarks:  
-fast  
  
C++ benchmarks:  
-fast  
  
Fortran benchmarks:  
-fast  
  
Benchmarks using both Fortran and C:  
-fast

## Peak Compiler Invocation

C benchmarks (except as noted below):  
/opt/intel/cc/10.1.012/bin/icc -L/opt/intel/cc/10.1.012/lib  
-I/opt/intel/cc/10.1.012/include  
  
433.milc: icc  
  
C++ benchmarks (except as noted below):  
icpc  
  
450.soplex: /opt/intel/cc/10.1.012/bin/icpc -L/opt/intel/cc/10.1.012/lib  
-I/opt/intel/cc/10.1.012/include  
  
Fortran benchmarks (except as noted below):  
ifort  
  
437.leslie3d: /opt/intel/fc/10.1.012/bin/ifort -L/opt/intel/fc/10.1.012/lib  
-I/opt/intel/fc/10.1.012/include  
  
Benchmarks using both Fortran and C:  
icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itautec

SPECfp\_rate2006 = 73.2

Servidor Itautec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 66.2

CPU2006 license: 9001  
Test sponsor: Itautec  
Tested by: Itautec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Peak Portability Flags (Continued)

453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes  
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3  
482.sphinx3: -fast -unroll2

C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32  
447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-  
450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3  
453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

Fortran benchmarks:

410.bwaves: -fast -prefetch  
416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-  
434.zeusmp: basepeak = yes  
437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3  
459.GemsFDTD: basepeak = yes  
465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Itaotec

SPECfp\_rate2006 = 73.2

Servidor Itaotec MX221 (Intel Xeon E5430)

SPECfp\_rate\_base2006 = 66.2

CPU2006 license: 9001  
Test sponsor: Itaotec  
Tested by: Itaotec

Test date: May-2008  
Hardware Availability: Dec-2007  
Software Availability: Jan-2008

## Peak Optimization Flags (Continued)

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itaotec-ic10.1-FP-intel64-linux-flags.20090714.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itaotec-ic10.1-FP-intel64-linux-flags.20090714.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.1.  
Report generated on Tue Jul 22 17:31:08 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 11 June 2008.