



SPEC® CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems Sun Fire X4600 M2

SPECfp®_rate2006 = 150

SPECfp_rate_base2006 = 138

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

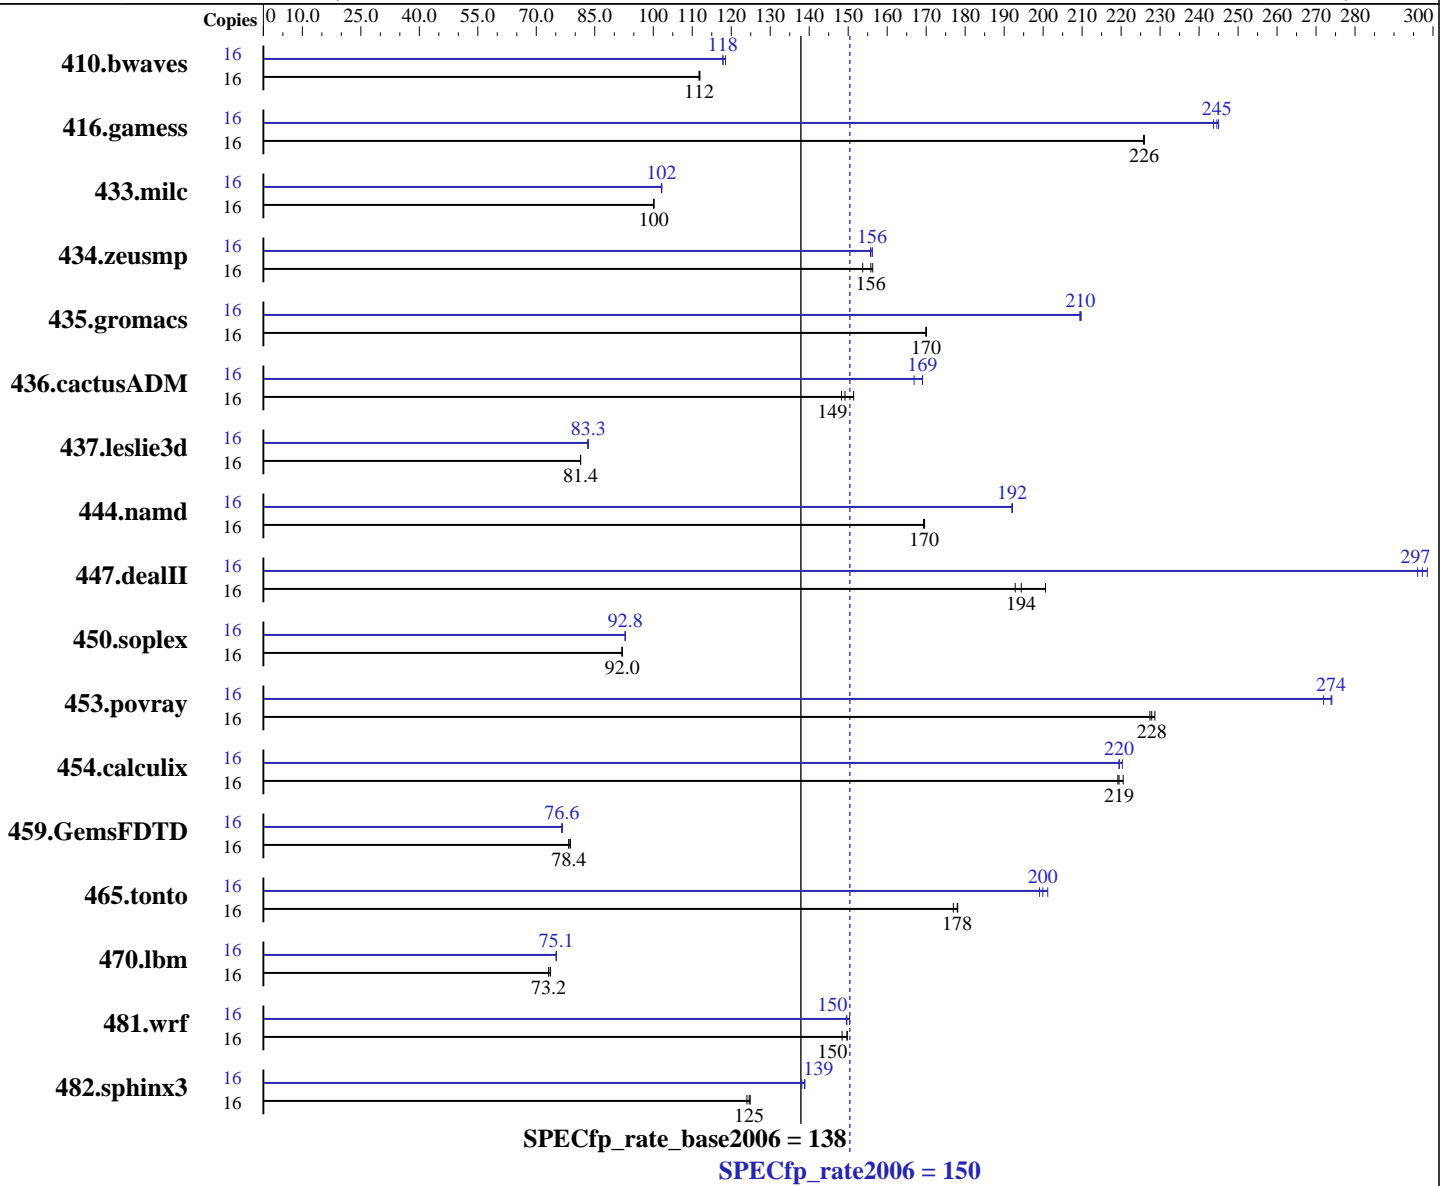

Hardware

CPU Name: AMD Opteron 8356
 CPU Characteristics:
 CPU MHz: 2300
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 4,8 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.1
 Auto Parallel: No
 File System: ext3
 System State: Multi-user, run level 3
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4600 M2

SPECfp_rate2006 = 150

SPECfp_rate_base2006 = 138

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

L3 Cache: 2 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem: SAS, 72 GB, 10 K RPM
Other Hardware: None

Other Software: None

Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	16	1945	112	<u>1945</u>	<u>112</u>	1942	112	16	1845	118	1835	119	<u>1844</u>	<u>118</u>		
416.gamess	16	<u>1387</u>	<u>226</u>	1386	226	1388	226	16	1285	244	<u>1281</u>	<u>245</u>	1279	245		
433.milc	16	1466	100	<u>1466</u>	<u>100</u>	1467	100	16	1437	102	<u>1438</u>	<u>102</u>	1439	102		
434.zeusmp	16	947	154	932	156	<u>934</u>	<u>156</u>	16	935	156	932	156	<u>932</u>	<u>156</u>		
435.gromacs	16	<u>672</u>	<u>170</u>	672	170	672	170	16	546	209	<u>545</u>	<u>210</u>	545	210		
436.cactusADM	16	<u>1282</u>	<u>149</u>	1263	151	1289	148	16	1146	167	1131	169	<u>1131</u>	<u>169</u>		
437.leslie3d	16	<u>1849</u>	<u>81.4</u>	1848	81.4	1849	81.3	16	1808	83.2	1805	83.3	<u>1805</u>	<u>83.3</u>		
444.namd	16	757	170	758	169	<u>757</u>	<u>170</u>	16	668	192	668	192	<u>668</u>	<u>192</u>		
447.dealII	16	949	193	912	201	<u>942</u>	<u>194</u>	16	<u>616</u>	<u>297</u>	618	296	613	299		
450.soplex	16	1451	92.0	<u>1450</u>	<u>92.0</u>	1450	92.0	16	<u>1438</u>	<u>92.8</u>	1437	92.9	1438	92.8		
453.povray	16	374	227	372	229	<u>374</u>	<u>228</u>	16	311	274	313	272	<u>311</u>	<u>274</u>		
454.calculix	16	599	221	<u>601</u>	<u>219</u>	602	219	16	599	220	601	219	<u>601</u>	<u>220</u>		
459.GemsFDTD	16	2155	78.8	<u>2166</u>	<u>78.4</u>	2168	78.3	16	2214	76.7	<u>2215</u>	<u>76.6</u>	2219	76.5		
465.tonto	16	<u>885</u>	<u>178</u>	884	178	890	177	16	783	201	791	199	<u>788</u>	<u>200</u>		
470.lbm	16	2985	73.7	3004	73.2	<u>3004</u>	<u>73.2</u>	16	2925	75.2	<u>2927</u>	<u>75.1</u>	2927	75.1		
481.wrf	16	1193	150	1204	148	<u>1194</u>	<u>150</u>	16	1195	150	1189	150	<u>1194</u>	<u>150</u>		
482.sphinx3	16	2514	124	<u>2503</u>	<u>125</u>	2497	125	16	2258	138	2245	139	<u>2247</u>	<u>139</u>		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

```
'numactl' was used to bind copies to the cores
Environment variable PGI_HUGE_PAGES set to 150
'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 4915200' was used to set environment locked pages in memory quantity
Set vm/nr_hugepages=2400 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages
```

Platform Notes

Default BIOS settings were used.



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4600 M2

SPECfp_rate2006 = 150
SPECfp_rate_base2006 = 138

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Base Compiler Invocation

C benchmarks:
pgcc
C++ benchmarks:
pgcpp
Fortran benchmarks:
pgf95
Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
C++ benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -tp barcelona-64 -Bstatic_pgi
Fortran benchmarks:
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4600 M2

SPECfp_rate2006 = 150

SPECfp_rate_base2006 = 138

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Base Optimization Flags (Continued)

Benchmarks using both Fortran and C:

```
-fast -Mipa=jobs:4 -Mipa=fast -Mipa=inline -Mfprelaxed  
-Msmartalloc=huge:150 -tp barcelona-64 -Bstatic_pgi
```

Base Other Flags

C benchmarks:

```
-w
```

C++ benchmarks:

```
-w
```

Fortran benchmarks:

```
-w
```

Benchmarks using both Fortran and C:

```
-w
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
pathcc
```

```
433.milc: pgcc
```

C++ benchmarks (except as noted below):

```
pathCC
```

```
444.namd: pgcpp
```

Fortran benchmarks (except as noted below):

```
pathf95
```

```
410.bwaves: pgf95
```

```
434.zeusmp: pgf95
```

Benchmarks using both Fortran and C (except as noted below):

```
pgcc pgf95
```

```
436.cactusADM: pathcc pathf95
```

```
481.wrf: pathcc pathf95
```



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4600 M2

SPECfp_rate2006 = 150
SPECfp_rate_base2006 = 138

CPU2006 license: 6
Test sponsor: Sun Microsystems
Tested by: Sun Microsystems

Test date: May-2008
Hardware Availability: May-2008
Software Availability: May-2008

Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -fno-second-underscore
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore
482.sphinx3: -DSPEC_CPU_LP64
```

Peak Optimization Flags

C benchmarks:

```
433.milc: -fastsse -Msmartalloc=huge:150 -Msafeptr -Mfprelaxed
-Mipa=jobs:4 -Mipa=inline -Mipa=arg -Mipa=const -Mipa=ptr
-Mipa=shape -tp barcelona-64 -Bstatic_pgi
```

```
470.lbm: -march=barcelona -Ofast -m3dnow
```

```
482.sphinx3: -march=barcelona -Ofast
```

C++ benchmarks:

```
444.namd: -Mpfi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fast -Mfprelaxed
-Msmartalloc=huge:150 --zc_eh -Mnodepchk -Munroll=n:4
-Munroll=m:8 -tp barcelona-64 -Bstatic_pgi
```

```
447.deaIII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-OPT:malloc_alg=1 -m32 -fno-exceptions
```

```
450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -m32 -O3 -TENV:frame_pointer=off
-LNO:prefetch=1
```

```
453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -CG:load_exe=0
```

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems

Sun Fire X4600 M2

SPECfp_rate2006 = 150

SPECfp_rate_base2006 = 138

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Optimization Flags (Continued)

410.bwaves: -Mphi(pass 1) -Mipa=jobs:4(pass 2) -Mipa=fast(pass 2)
-Mipa=inline(pass 2) -Mpfo(pass 2) -fastsse -Mfprelaxed
-Msmartalloc -Mprefetch=distance:12 -Mprefetch=nta
-tp barcelona-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

437.leslie3d: -march=barcelona -Ofast -m3dnow -OPT:unroll_size=256
-CG:load_exe=0 -OPT:malloc_alg=1

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-OPT:malloc_alg=1

465.tonto: -march=barcelona -Ofast -OPT:malloc_alg=1
-OPT:alias=no_f90_pointer_alias -LNO:blocking=off
-CG:load_exe=1 -IPA:plimit=525

Benchmarks using both Fortran and C:

435.gromacs: -fast -Mfpapprox=rsqrt -Mipa=jobs:4 -Mipa=fast
-Mipa=inline -Mfprelaxed -Msmartalloc=huge:150
-tp barcelona-64 -Bstatic_pgi

436.cactusADM: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -WOPT:aggstr=0

454.calculix: -fastsse -Mfprelaxed -Msmartalloc=huge:150 -Mipa=jobs:4
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -OPT:malloc_alg=1 -m3dnow
-LANG:copyinout=off -IPA:callee_limit=5000

Peak Other Flags

C benchmarks:

433.milc: -w

C++ benchmarks:

444.namd: -w

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2016 Standard Performance Evaluation Corporation

Sun Microsystems
Sun Fire X4600 M2

SPECfp_rate2006 = 150

SPECfp_rate_base2006 = 138

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2008

Hardware Availability: May-2008

Software Availability: May-2008

Peak Other Flags (Continued)

Fortran benchmarks:

410.bwaves: -w

434.zeusmp: -w

Benchmarks using both Fortran and C:

435.gromacs: -w

454.calculix: -w

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/amd123GH-flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.0.
Report generated on Tue Sep 13 11:32:58 2016 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 8 July 2008.