



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260  
(Intel Xeon L5420, 2.50 GHz)

SPECfp®\_rate2006 = 61.1

SPECfp\_rate\_base2006 = 54.1

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

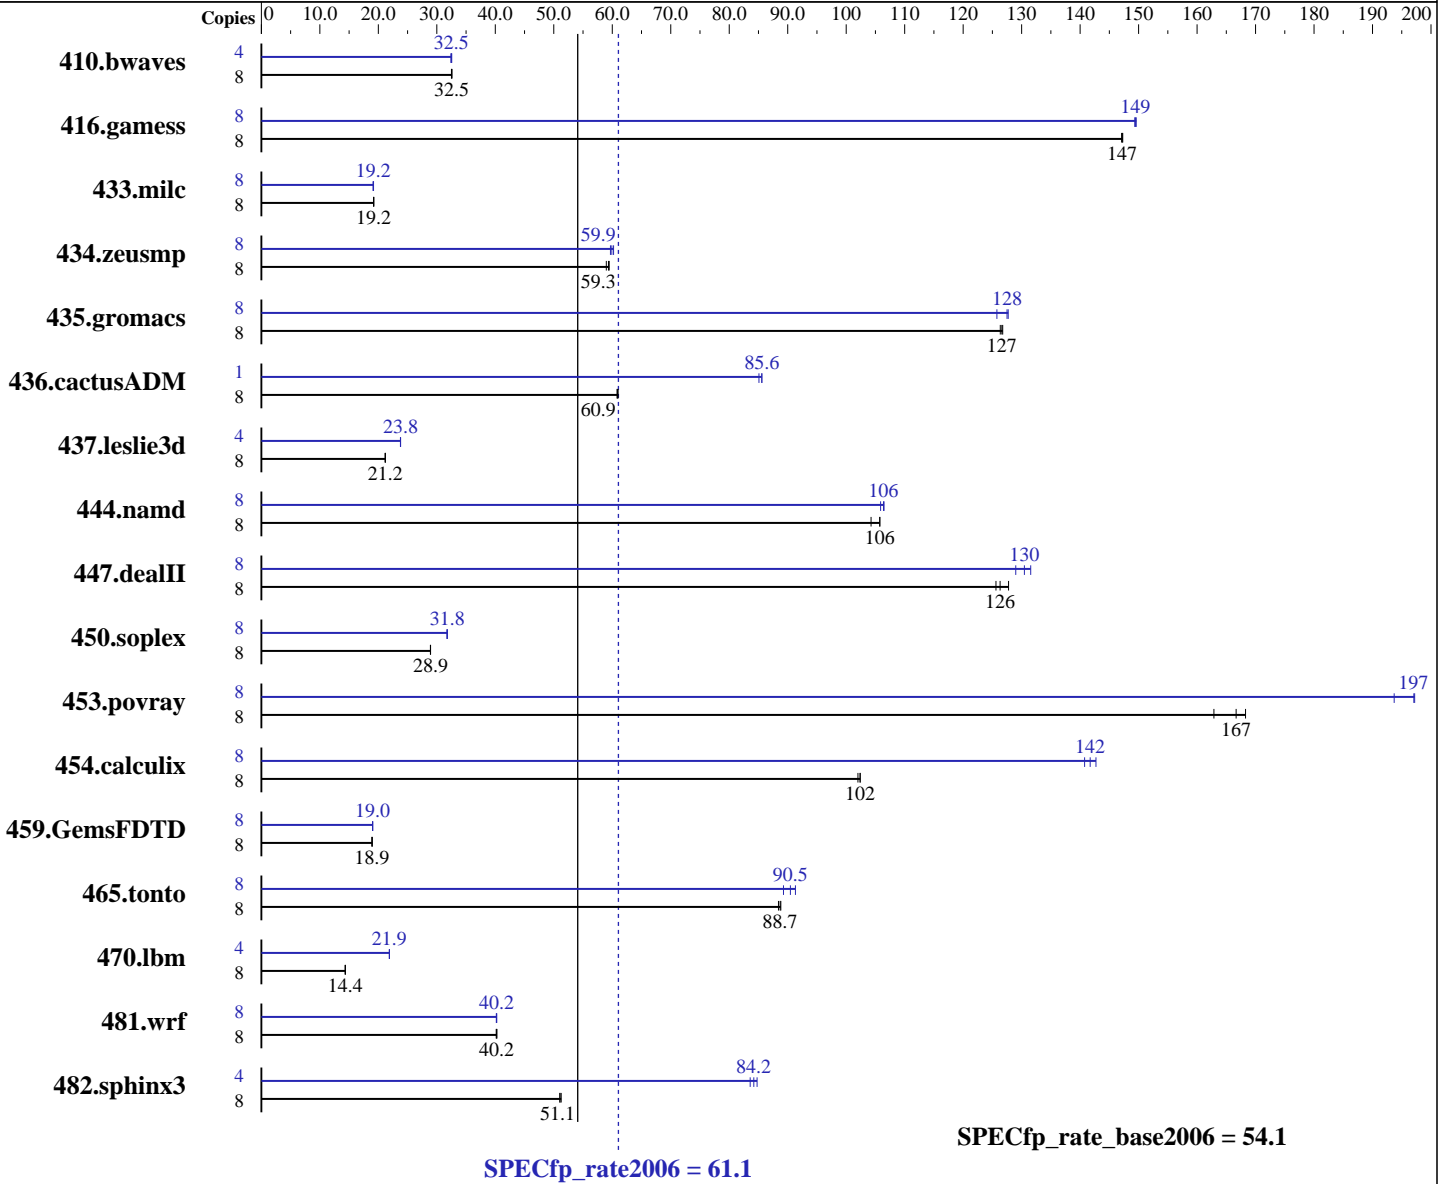

### Hardware

CPU Name: Intel Xeon L5420  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 2500  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE LINUX Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ and Fortran Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008, l\_fc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260  
(Intel Xeon L5420, 2.50 GHz)

SPECfp\_rate2006 = 61.1

SPECfp\_rate\_base2006 = 54.1

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (4x4 GB) FB-DIMM PC2-5300F ECC CL5  
Disk Subsystem: 1x73 GB SAS, 10000 RPM  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.17.50.0.15

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3345	32.5	3335	32.6	<b>3343</b>	<b>32.5</b>	4	1678	32.4	<b>1672</b>	<b>32.5</b>	1670	32.5
416.gamess	8	<b>1064</b>	<b>147</b>	1063	147	1065	147	8	1049	149	1047	150	<b>1048</b>	<b>149</b>
433.milc	8	3822	19.2	3826	19.2	<b>3824</b>	<b>19.2</b>	8	3846	19.1	3829	19.2	<b>3833</b>	<b>19.2</b>
434.zeusmp	8	<b>1227</b>	<b>59.3</b>	1234	59.0	1224	59.5	8	1220	59.7	1209	60.2	<b>1215</b>	<b>59.9</b>
435.gromacs	8	<b>451</b>	<b>127</b>	452	126	451	127	8	<b>448</b>	<b>128</b>	454	126	447	128
436.cactusADM	8	<b>1570</b>	<b>60.9</b>	1572	60.8	1567	61.0	1	<b>140</b>	<b>85.6</b>	140	85.6	140	85.1
437.leslie3d	8	<b>3549</b>	<b>21.2</b>	3549	21.2	3550	21.2	4	1581	23.8	1579	23.8	<b>1580</b>	<b>23.8</b>
444.namd	8	607	106	615	104	<b>607</b>	<b>106</b>	8	<b>603</b>	<b>106</b>	606	106	603	106
447.dealII	8	729	126	716	128	<b>725</b>	<b>126</b>	8	696	132	<b>701</b>	<b>130</b>	709	129
450.soplex	8	2306	28.9	2308	28.9	<b>2307</b>	<b>28.9</b>	8	2102	31.7	2099	31.8	<b>2100</b>	<b>31.8</b>
453.povray	8	261	163	<b>255</b>	<b>167</b>	253	168	8	220	194	<b>216</b>	<b>197</b>	216	197
454.calculix	8	647	102	<b>645</b>	<b>102</b>	645	102	8	462	143	469	141	<b>466</b>	<b>142</b>
459.GemsFDTD	8	4479	18.9	<b>4485</b>	<b>18.9</b>	4487	18.9	8	<b>4462</b>	<b>19.0</b>	4463	19.0	4459	19.0
465.tonto	8	886	88.8	<b>887</b>	<b>88.7</b>	890	88.4	8	862	91.3	882	89.3	<b>870</b>	<b>90.5</b>
470.lbm	8	7662	14.3	7659	14.4	<b>7659</b>	<b>14.4</b>	4	<b>2511</b>	<b>21.9</b>	2510	21.9	2511	21.9
481.wrf	8	<b>2220</b>	<b>40.2</b>	2225	40.2	2220	40.3	8	2221	40.2	<b>2222</b>	<b>40.2</b>	2224	40.2
482.sphinx3	8	<b>3054</b>	<b>51.1</b>	3055	51.0	3041	51.3	4	<b>926</b>	<b>84.2</b>	933	83.6	920	84.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
'/usr/bin/taskset' used to bind processes to CPUs  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M

## General Notes

All benchmarks compiled in 64-bit mode except 437.leslie3d, 450.soplex, 470.lbm and 482.sphinx3, at peak, are compiled in 32-bit mode  
BIOS settings :  
Hardware Prefetcher : Enabled  
Adjacent Cache-Line Prefetch : Disabled



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260  
(Intel Xeon L5420, 2.50 GHz)

SPECfp\_rate2006 = 61.1

SPECfp\_rate\_base2006 = 54.1

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Jul-2008  
**Hardware Availability:** Jan-2008  
**Software Availability:** Nov-2007

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

Fortran benchmarks:  
ifort

Benchmarks using both Fortran and C:  
icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-fast

C++ benchmarks:  
-fast

Fortran benchmarks:  
-fast

Benchmarks using both Fortran and C:  
-fast



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260  
(Intel Xeon L5420, 2.50 GHz)

SPECfp\_rate2006 = 61.1

SPECfp\_rate\_base2006 = 54.1

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jul-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Peak Compiler Invocation

C benchmarks (except as noted below):

```
/opt/intel/cc/10.1.008/bin/icc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

433.milc: icc

C++ benchmarks (except as noted below):

icpc

```
450.soplex: /opt/intel/cc/10.1.008/bin/icpc -L/opt/intel/cc/10.1.008/lib  
-I/opt/intel/cc/10.1.008/include
```

Fortran benchmarks (except as noted below):

ifort

```
437.leslie3d: /opt/intel/fc/10.1.008/bin/ifort -L/opt/intel/fc/10.1.008/lib  
-I/opt/intel/fc/10.1.008/include
```

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64  
416.gamess: -DSPEC_CPU_LP64  
433.milc: -DSPEC_CPU_LP64  
434.zeusmp: -DSPEC_CPU_LP64  
435.gromacs: -DSPEC_CPU_LP64 -nofor_main  
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main  
444.namd: -DSPEC_CPU_LP64  
447.deallI: -DSPEC_CPU_LP64  
453.povray: -DSPEC_CPU_LP64  
454.calculix: -DSPEC_CPU_LP64 -nofor_main  
459.GemsFDTD: -DSPEC_CPU_LP64  
465.tonto: -DSPEC_CPU_LP64  
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32
```

```
470.lbm: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-scalar-rep- -prefetch -opt-malloc-options=3
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260  
(Intel Xeon L5420, 2.50 GHz)

SPECfp\_rate2006 = 61.1

SPECfp\_rate\_base2006 = 54.1

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jul-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Peak Optimization Flags (Continued)

482.sphinx3: -fast -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -fast -fno-alias  
-auto-ilp32

447.dealIII: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -fast  
-opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4  
-ansi-alias

### Fortran benchmarks:

410.bwaves: -fast -prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-ansi-alias -scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -fast

437.leslie3d: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-opt-malloc-options=3

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2 -Ob0  
-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch  
-auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-prefetch -parallel -auto-ilp32

454.calculix: -fast -unroll-aggressive -auto-ilp32

481.wrf: -fast -auto-ilp32

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel101\\_fp\\_flags.20090713.00.html](http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090713.00.html)



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260  
(Intel Xeon L5420, 2.50 GHz)

**SPECfp\_rate2006 = 61.1**

**SPECfp\_rate\_base2006 = 54.1**

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Jul-2008  
**Hardware Availability:** Jan-2008  
**Software Availability:** Nov-2007

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel101\\_fp\\_flags.20090713.00.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel101_fp_flags.20090713.00.xml)

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 19:11:04 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 2 September 2008.