



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260+  
(Intel Xeon E5405, 2.00 GHz)

SPECint®\_rate2006 = 101

SPECint\_rate\_base2006 = 83.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Bull SAS

Test date: Jul-2008

Hardware Availability: Jan-2008

Software Availability: Nov-2007

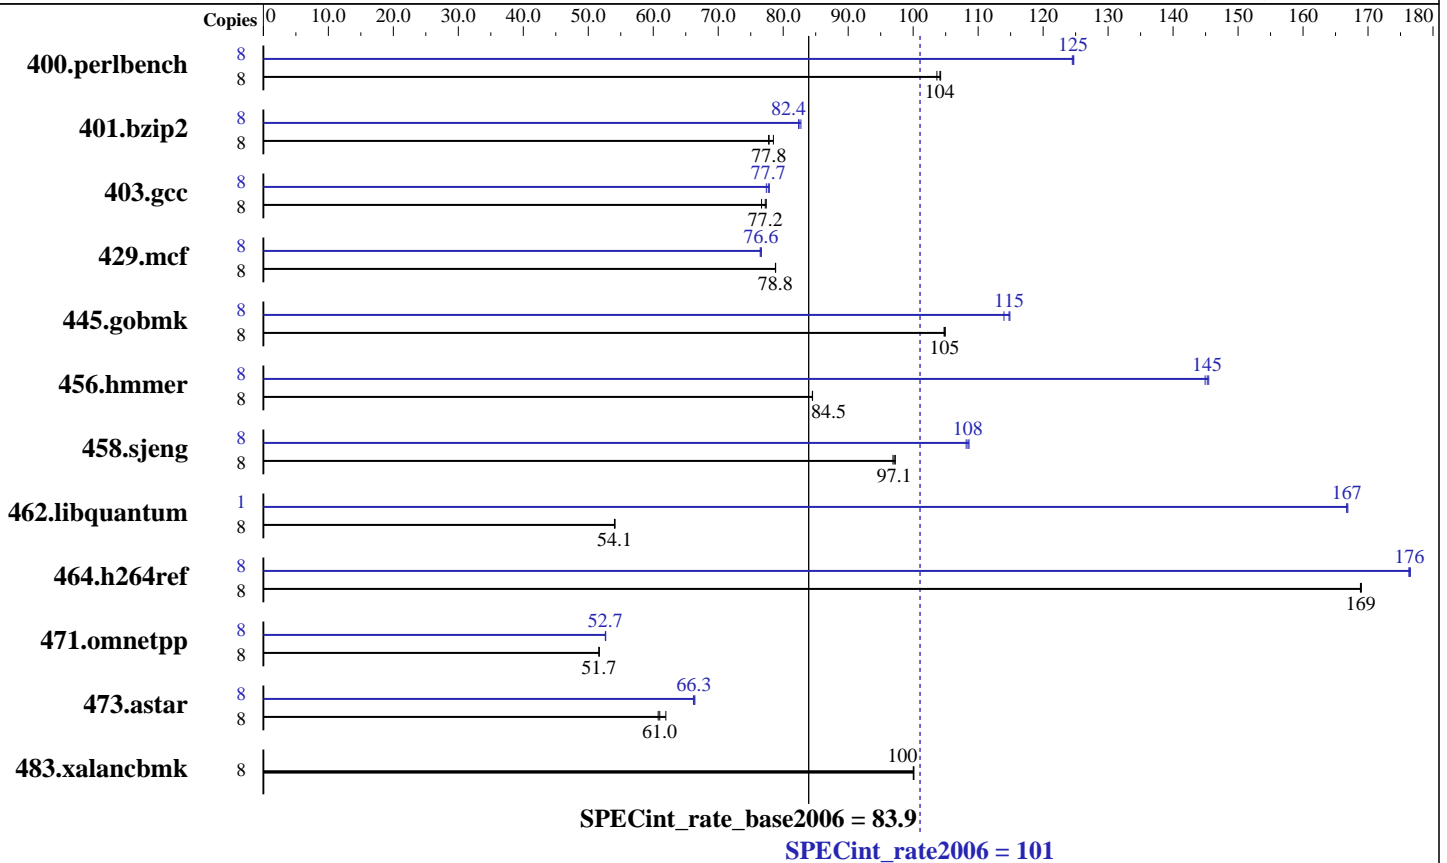

### Hardware

CPU Name: Intel Xeon E5405  
 CPU Characteristics: 1333 MHz system bus  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
 L3 Cache: None  
 Other Cache: None  
 Memory: 16 GB (8x2 GB) FB-DIMM PC2-5300F ECC CL5  
 Disk Subsystem: 1x73 GB SAS, 10000 RPM  
 Other Hardware: None

### Software

Operating System: SUSE LINUX Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smp  
 Compiler: Intel C++ Compiler 10.1 for Linux Build 20070913 Package ID: l\_cc\_p\_10.1.008  
 Auto Parallel: Yes  
 File System: ext2  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.17.50.0.15  
 SmartHeap library V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260+  
(Intel Xeon E5405, 2.00 GHz)

SPECint\_rate2006 = 101

SPECint\_rate\_base2006 = 83.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jul-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	750	104	754	104	<u>751</u>	<u>104</u>	8	628	124	627	125	<u>627</u>	<u>125</u>
401.bzip2	8	993	77.7	984	78.5	<u>992</u>	<u>77.8</u>	8	<u>936</u>	<u>82.4</u>	937	82.4	933	82.7
403.gcc	8	840	76.7	832	77.4	<u>834</u>	<u>77.2</u>	8	<u>829</u>	<u>77.7</u>	832	77.4	827	77.9
429.mcf	8	<u>926</u>	<u>78.8</u>	925	78.8	926	78.8	8	<u>953</u>	<u>76.6</u>	954	76.5	952	76.6
445.gobmk	8	800	105	801	105	<u>801</u>	<u>105</u>	8	730	115	736	114	<u>731</u>	<u>115</u>
456.hmmer	8	<u>883</u>	<u>84.5</u>	883	84.5	883	84.5	8	515	145	<u>514</u>	<u>145</u>	513	145
458.sjeng	8	999	96.9	<u>997</u>	<u>97.1</u>	995	97.3	8	<u>893</u>	<u>108</u>	895	108	891	109
462.libquantum	8	3063	54.1	3068	54.0	<u>3066</u>	<u>54.1</u>	1	124	167	124	167	<u>124</u>	<u>167</u>
464.h264ref	8	<u>1048</u>	<u>169</u>	1049	169	1048	169	8	1004	176	1003	177	<u>1004</u>	<u>176</u>
471.omnetpp	8	968	51.7	968	51.7	<u>968</u>	<u>51.7</u>	8	<u>950</u>	<u>52.7</u>	950	52.6	949	52.7
473.astar	8	907	61.9	924	60.8	<u>921</u>	<u>61.0</u>	8	<u>847</u>	<u>66.3</u>	846	66.4	848	66.2
483.xalancbmk	8	551	100	552	100	<u>552</u>	<u>100</u>	8	551	100	552	100	<u>552</u>	<u>100</u>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M

## General Notes

All benchmarks compiled in 32-bit mode except 401.bzip2 and 456.hmmer, for peak, are compiled in 64-bit mode  
BIOS settings :  
Hardware Prefetcher : Enabled  
Adjacent Cache-Line Prefetch : Disabled

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260+  
(Intel Xeon E5405, 2.00 GHz)

SPECint\_rate2006 = 101

SPECint\_rate\_base2006 = 83.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jul-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-fast -inline-calloc -opt-malloc-options=3  
  
C++ benchmarks:  
-xT -ipo -O3 -no-prec-div -Wl,-z,muldefs  
-L/spec/cpu2006/lib -lsmartheap

## Base Other Flags

C benchmarks:  
403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):  
icc  
  
401.bzip2: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include  
  
456.hmmmer: /opt/intel/cce/10.1.008/bin/icc  
-L/opt/intel/cce/10.1.008/lib  
-I/opt/intel/cce/10.1.008/include  
  
C++ benchmarks:  
icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmmer: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260+  
(Intel Xeon E5405, 2.00 GHz)

SPECint\_rate2006 = 101

SPECint\_rate\_base2006 = 83.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Bull SAS

Test date: Jul-2008  
Hardware Availability: Jan-2008  
Software Availability: Nov-2007

## Peak Portability Flags (Continued)

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -fast -ansi-alias  
-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -fast -prefetch

403.gcc: -fast -inline-calloc -opt-malloc-options=3

429.mcf: -fast -prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xT -O2 -ipo  
-no-prec-div -ansi-alias

456.hmmer: -fast -unroll2 -ansi-alias -opt-multi-version-aggressive

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll4

462.libquantum: -fast -unroll4 -Ob0 -prefetch  
-opt-streaming-stores always -vec-guard-write  
-opt-malloc-options=3 -parallel -par-runtime-control

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -fast -unroll2  
-ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xT -O3 -ipo  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

NovaScale B260+  
(Intel Xeon E5405, 2.00 GHz)

SPECint\_rate2006 = 101

SPECint\_rate\_base2006 = 83.9

**CPU2006 license:** 20  
**Test sponsor:** Bull SAS  
**Tested by:** Bull SAS

**Test date:** Jul-2008  
**Hardware Availability:** Jan-2008  
**Software Availability:** Nov-2007

## Peak Other Flags (Continued)

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel101\\_int\\_flags.20090714.html](http://www.spec.org/cpu2006/flags/EM64T_Intel101_int_flags.20090714.html)

You can also download the XML flags source by saving the following link:

[http://www.spec.org/cpu2006/flags/EM64T\\_Intel101\\_int\\_flags.20090714.xml](http://www.spec.org/cpu2006/flags/EM64T_Intel101_int_flags.20090714.xml)

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.0.  
Report generated on Tue Jul 22 19:33:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 September 2008.