



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECfp<sup>®</sup>\_rate2006 = 48.5

ProLiant BL460c  
(3.33 GHz, Intel Xeon X5470)

### SPECfp\_rate\_base2006 = 45.1

CPU2006 license: 3


Test date: Aug-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Sep-2008

Tested by: Hewlett-Packard Company

Software Availability: Nov-2008

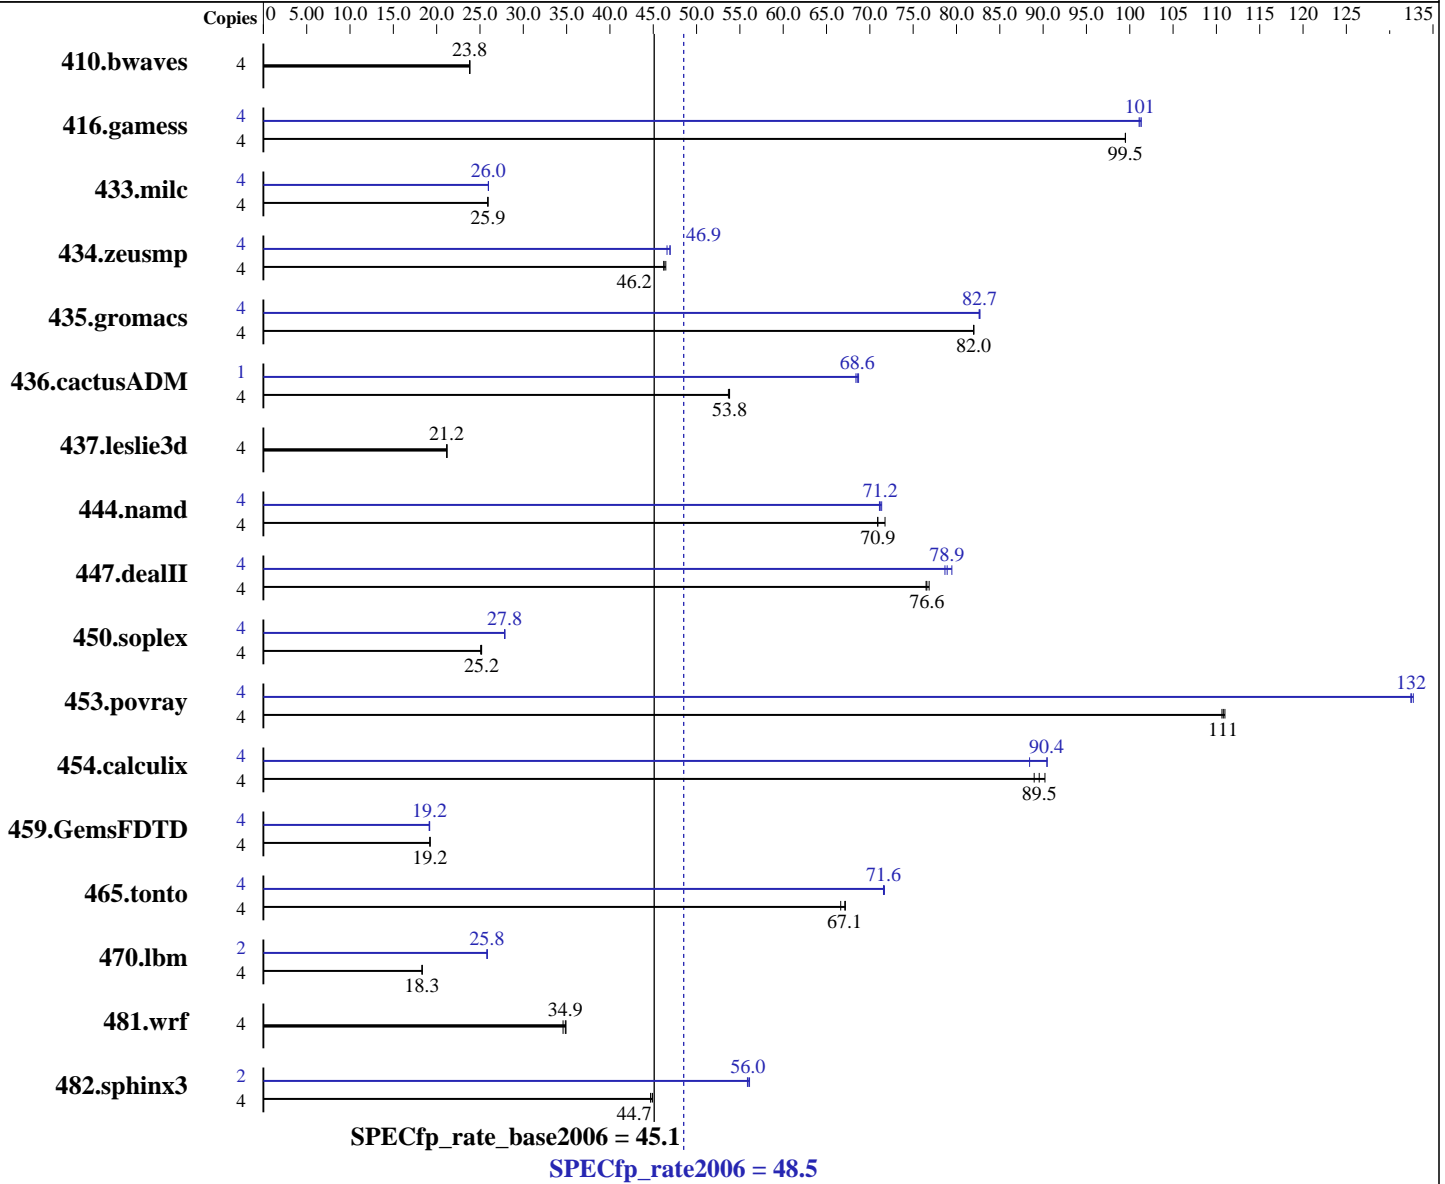

### Hardware

CPU Name: Intel Xeon X5470  
 CPU Characteristics: 3.33 GHz, 2x6 MB L2 shared, 1333 MHz system bus  
 CPU MHz: 3333  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 10 (x86\_64) SP1, Kernel 2.6.16.46-0.12-smpp  
 Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080730 Package ID: l\_cproc\_b\_11.0.042, l\_fproc\_b\_11.0.042  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECfp\_rate2006 = 48.5

ProLiant BL460c  
(3.33 GHz, Intel Xeon X5470)

SPECfp\_rate\_base2006 = 45.1

CPU2006 license: 3  
Test sponsor: Hewlett-Packard Company  
Tested by: Hewlett-Packard Company

Test date: Aug-2008  
Hardware Availability: Sep-2008  
Software Availability: Nov-2008

L3 Cache: None  
Other Cache: None  
Memory: 16 GB (8x2 GB PC2-5300F CL5)  
Disk Subsystem: 2x72 GB 10 K SAS  
Other Hardware: None

Peak Pointers: 32/64-bit  
Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base								Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio		
410.bwaves	4	2281	23.8	<u>2283</u>	<u>23.8</u>	2284	23.8	4	2281	23.8	<u>2283</u>	<u>23.8</u>	2284	23.8		
416.gamess	4	<u>787</u>	<u>99.5</u>	787	99.5	787	99.5	4	775	101	773	101	<u>774</u>	<u>101</u>		
433.milc	4	1417	25.9	<u>1417</u>	<u>25.9</u>	1417	25.9	4	1413	26.0	<u>1414</u>	<u>26.0</u>	1414	26.0		
434.zeusmp	4	<u>787</u>	<u>46.2</u>	784	46.4	788	46.2	4	781	46.6	<u>776</u>	<u>46.9</u>	775	46.9		
435.gromacs	4	348	82.0	<u>348</u>	<u>82.0</u>	348	82.0	4	<u>345</u>	<u>82.7</u>	345	82.7	346	82.6		
436.cactusADM	4	<u>888</u>	<u>53.8</u>	888	53.8	891	53.7	1	175	68.4	<u>174</u>	<u>68.6</u>	174	68.7		
437.leslie3d	4	1774	21.2	<u>1776</u>	<u>21.2</u>	1777	21.2	4	1774	21.2	<u>1776</u>	<u>21.2</u>	1777	21.2		
444.namd	4	452	70.9	<u>452</u>	<u>70.9</u>	447	71.8	4	451	71.1	<u>451</u>	<u>71.2</u>	450	71.4		
447.dealII	4	<u>598</u>	<u>76.6</u>	595	76.8	598	76.5	4	576	79.5	582	78.7	<u>580</u>	<u>78.9</u>		
450.soplex	4	<u>1325</u>	<u>25.2</u>	1324	25.2	1330	25.1	4	1196	27.9	1199	27.8	<u>1198</u>	<u>27.8</u>		
453.povray	4	192	111	192	111	<u>192</u>	<u>111</u>	4	160	133	161	132	<u>161</u>	<u>132</u>		
454.calculix	4	366	90.2	371	89.0	<u>369</u>	<u>89.5</u>	4	365	90.5	373	88.4	<u>365</u>	<u>90.4</u>		
459.GemsFDTD	4	2208	19.2	<u>2207</u>	<u>19.2</u>	2206	19.2	4	<u>2212</u>	<u>19.2</u>	2218	19.1	2212	19.2		
465.tonto	4	586	67.2	<u>587</u>	<u>67.1</u>	591	66.6	4	<u>550</u>	<u>71.6</u>	550	71.6	549	71.7		
470.lbm	4	3000	18.3	2999	18.3	<u>2999</u>	<u>18.3</u>	2	1063	25.8	1065	25.8	<u>1064</u>	<u>25.8</u>		
481.wrf	4	1292	34.6	1279	34.9	<u>1282</u>	<u>34.9</u>	4	1292	34.6	1279	34.9	<u>1282</u>	<u>34.9</u>		
482.sphinx3	4	1736	44.9	<u>1744</u>	<u>44.7</u>	1744	44.7	2	<u>697</u>	<u>56.0</u>	695	56.1	698	55.9		

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 436.cactusADM peak

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to physical,0  
KMP\_STACKSIZE set to 64M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 48.5**

ProLiant BL460c  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate\_base2006 = 45.1**

**CPU2006 license:** 3

**Test date:** Aug-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2008

## Platform Notes

BIOS configuration:

Power Regulator set to Static High Performance Mode  
Adjacent Sector Prefetch Disabled  
Hardware Prefetcher Disabled

## Base Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 48.5**

ProLiant BL460c  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate\_base2006 = 45.1**

**CPU2006 license:** 3

**Test date:** Aug-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2008

## Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

482.sphinx3: /opt/intel/Compiler/11.0/042/bin/ia32/icc  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

C++ benchmarks (except as noted below):

icpc

450.soplex: /opt/intel/Compiler/11.0/042/bin/ia32/icpc  
-L/opt/intel/Compiler/11.0/042/ipp/ia32/lib  
-I/opt/intel/Compiler/11.0/042/ipp/ia32/include

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

**SPECfp\_rate2006 = 48.5**

ProLiant BL460c  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate\_base2006 = 45.1**

**CPU2006 license:** 3

**Test date:** Aug-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2008

## Peak Optimization Flags

### C benchmarks:

433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias

470.lbm: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch  
-auto-ilp32

482.sphinx3: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2

### C++ benchmarks:

444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -fno-alias -auto-ilp32

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep-

450.soplex: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

### Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -ansi-alias  
-scalar-rep-

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static

437.leslie3d: basepeak = yes

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -Ob0 -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll4 -auto

### Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECfp\_rate2006 = 48.5**

ProLiant BL460c  
(3.33 GHz, Intel Xeon X5470)

**SPECfp\_rate\_base2006 = 45.1**

**CPU2006 license:** 3

**Test date:** Aug-2008

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Sep-2008

**Tested by:** Hewlett-Packard Company

**Software Availability:** Nov-2008

## Peak Optimization Flags (Continued)

454.calculix: -xSSE4.1 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.20090713.html>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revD.20090713.xml>

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090713.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Tue Jul 22 20:54:32 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 1 October 2008.