



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp®_rate2006 = 82.3

Asus P6T Deluxe (Intel Core i7-940)

SPECfp_rate_base2006 = 79.2

CPU2006 license: 13


Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

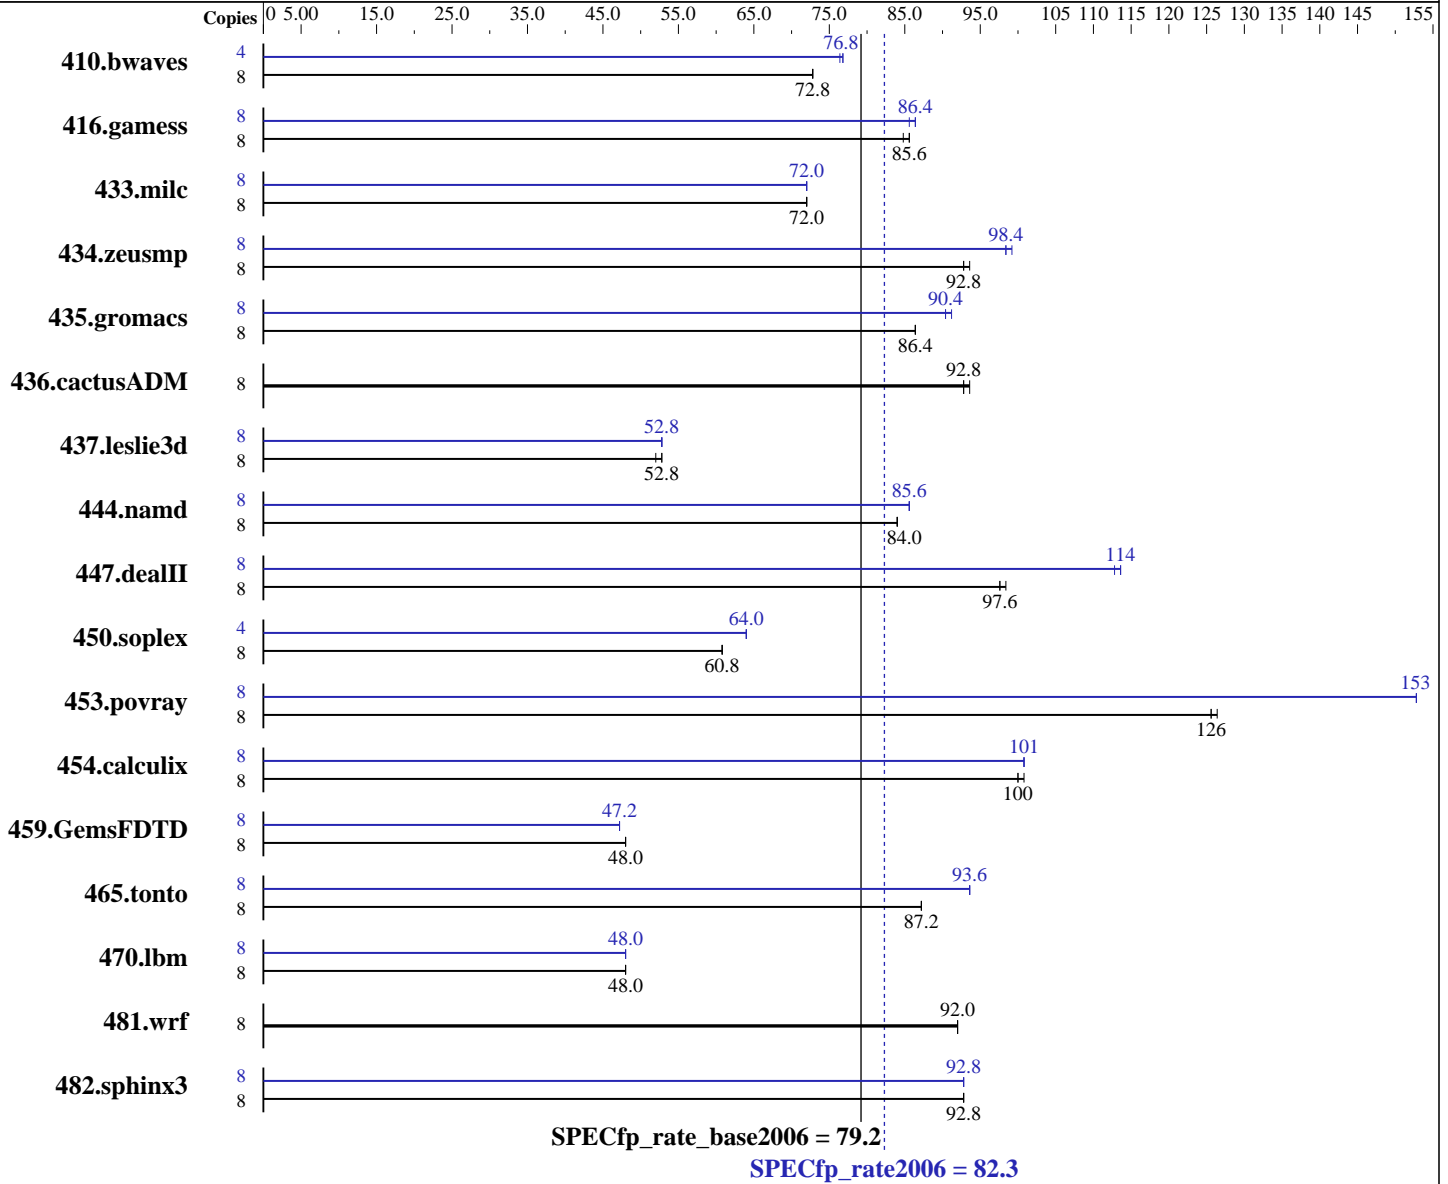

Hardware

CPU Name: Intel Core i7-940
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz
 CPU MHz: 2933
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Windows Vista Ultimate w/ SP1 (64-bit)
 Compiler: Intel C++ Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cproc_p_11.0.054
 Intel Visual Fortran Compiler Professional 11.0 for IA32
 Build 20080930 Package ID: w_cprof_p_11.0.054
 Microsoft Visual Studio 2008 (for libraries)
 Auto Parallel: No
 File System: NTFS

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 82.3

Asus P6T Deluxe (Intel Core i7-940)

SPECfp_rate_base2006 = 79.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 12 GB (6 x 2GB Samsung M378B5673DZ1-CF8 DDR3-1066 CL7)
Disk Subsystem: 80 GB Intel X-25M SATA Solid-State Drive
Other Hardware: None

System State: Default
Base Pointers: 32-bit
Peak Pointers: 32-bit
Other Software: SmartHeap Library Version 8.1 from <http://www.microquill.com/>

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1487	72.8	1486	72.8	1486	72.8	4	709	76.8	709	76.8	710	76.4
416.gamess	8	1827	85.6	1839	84.8	1824	85.6	8	1830	85.6	1805	86.4	1816	86.4
433.milc	8	1021	72.0	1021	72.0	1022	72.0	8	1023	72.0	1022	72.0	1023	72.0
434.zeusmp	8	786	92.8	775	93.6	783	92.8	8	740	98.4	736	99.2	740	98.4
435.gromacs	8	659	86.4	659	86.4	660	86.4	8	632	90.4	628	91.2	632	90.4
436.cactusADM	8	1028	92.8	1025	93.6	1031	92.8	8	1028	92.8	1025	93.6	1031	92.8
437.leslie3d	8	1436	52.0	1435	52.8	1434	52.8	8	1434	52.8	1435	52.8	1433	52.8
444.namd	8	766	84.0	765	84.0	766	84.0	8	750	85.6	749	85.6	749	85.6
447.dealII	8	935	97.6	940	97.6	931	98.4	8	808	114	812	113	807	114
450.soplex	8	1095	60.8	1095	60.8	1095	60.8	4	521	64.0	521	64.0	521	64.0
453.povray	8	338	126	338	126	339	126	8	279	153	279	153	279	153
454.calculix	8	658	100	657	101	658	100	8	653	101	653	101	652	101
459.GemsFDTD	8	1774	48.0	1771	48.0	1769	48.0	8	1786	47.2	1787	47.2	1787	47.2
465.tonto	8	905	87.2	899	87.2	901	87.2	8	844	93.6	841	93.6	845	93.6
470.lbm	8	2303	48.0	2303	48.0	2303	48.0	8	2304	48.0	2303	48.0	2303	48.0
481.wrf	8	972	92.0	969	92.0	972	92.0	8	972	92.0	969	92.0	972	92.0
482.sphinx3	8	1687	92.8	1687	92.8	1687	92.8	8	1685	92.8	1685	92.8	1683	92.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

General Notes

Tested systems can be used with Shin-G ATX case,
PC Power and Cooling 1200W power supply
System was configured with nVidia GTX 280 discrete graphics card
Binaries were built on Windows Vista Ultimate (32-bit)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 82.3

Asus P6T Deluxe (Intel Core i7-940)

SPECfp_rate_base2006 = 79.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99
C++ benchmarks:
icl -Qvc9
Fortran benchmarks:
ifort
Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Base Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Base Optimization Flags

C benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
C++ benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch -Qcxx-features
/F1000000000 shlw32m.lib -link /FORCE:MULTIPLE
Fortran benchmarks:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000
Benchmarks using both Fortran and C:
-QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

Peak Compiler Invocation

C benchmarks:
icl -Qvc9 -Qc99
C++ benchmarks:
icl -Qvc9

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 82.3

Asus P6T Deluxe (Intel Core i7-940)

SPECfp_rate_base2006 = 79.2

CPU2006 license: 13
Test sponsor: Intel Corporation
Tested by: Intel Corporation

Test date: Oct-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

Fortran benchmarks:
ifort

Benchmarks using both Fortran and C:
icl -Qvc9 -Qc99 ifort

Peak Portability Flags

436.cactusADM: -Qlowercase /assume:underscore
444.namd: -TP
447.dealII: -DDEAL_II_MEMBER_VAR_SPECIALIZATION_BUG
453.povray: -DSPEC_CPU_WINDOWS_ICL
454.calculix: -DSPEC_CPU_NOZMODIFIER -Qlowercase
481.wrf: -DSPEC_CPU_WINDOWS_ICL

Peak Optimization Flags

C benchmarks:

433.milc: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000

470.lbm: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F1000000000

482.sphinx3: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qunroll2 /F1000000000

C++ benchmarks:

444.namd: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Oa /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

447.dealII: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Qansi-alias
-Qscalar-rep- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

450.soplex: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000 shlw32m.lib
-link /FORCE:MULTIPLE

453.povray: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qansi-alias /F1000000000
shlw32m.lib -link /FORCE:MULTIPLE

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 82.3

Asus P6T Deluxe (Intel Core i7-940)

SPECfp_rate_base2006 = 79.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

Fortran benchmarks:

410.bwaves: -QxSSE4.2 -Qipo -O3 -Qprec-div- -Qopt-prefetch
/F1000000000

416.gamess: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qansi-alias
-Qscalar-rep- /F1000000000

434.zeusmp: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- /F1000000000

437.leslie3d: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

459.GemsFDTD: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll2 -Ob0 -Qopt-prefetch
/F1000000000

465.tonto: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qunroll4 -Qauto /F1000000000

Benchmarks using both Fortran and C:

435.gromacs: -QxSSE4.2(pass 2) -Qprof_gen(pass 1) -Qprof_use(pass 2)
-Qipo -O3 -Qprec-div- -Qopt-prefetch /F1000000000

436.cactusADM: basepeak = yes

454.calculix: -QxSSE4.2 -Qipo -O3 -Qprec-div- /F1000000000

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.html>

<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-win32-revA.20090713.xml>

<http://www.spec.org/cpu2006/flags/Intel-Win32-Platform.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ASUSTeK Computer Inc.
(Test Sponsor: Intel Corporation)

SPECfp_rate2006 = 82.3

Asus P6T Deluxe (Intel Core i7-940)

SPECfp_rate_base2006 = 79.2

CPU2006 license: 13

Test sponsor: Intel Corporation

Tested by: Intel Corporation

Test date: Oct-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 20:10:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 17 November 2008.