



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint®2006 = 19.2

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint_base2006 = 16.1

CPU2006 license: 11


Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: May-2008

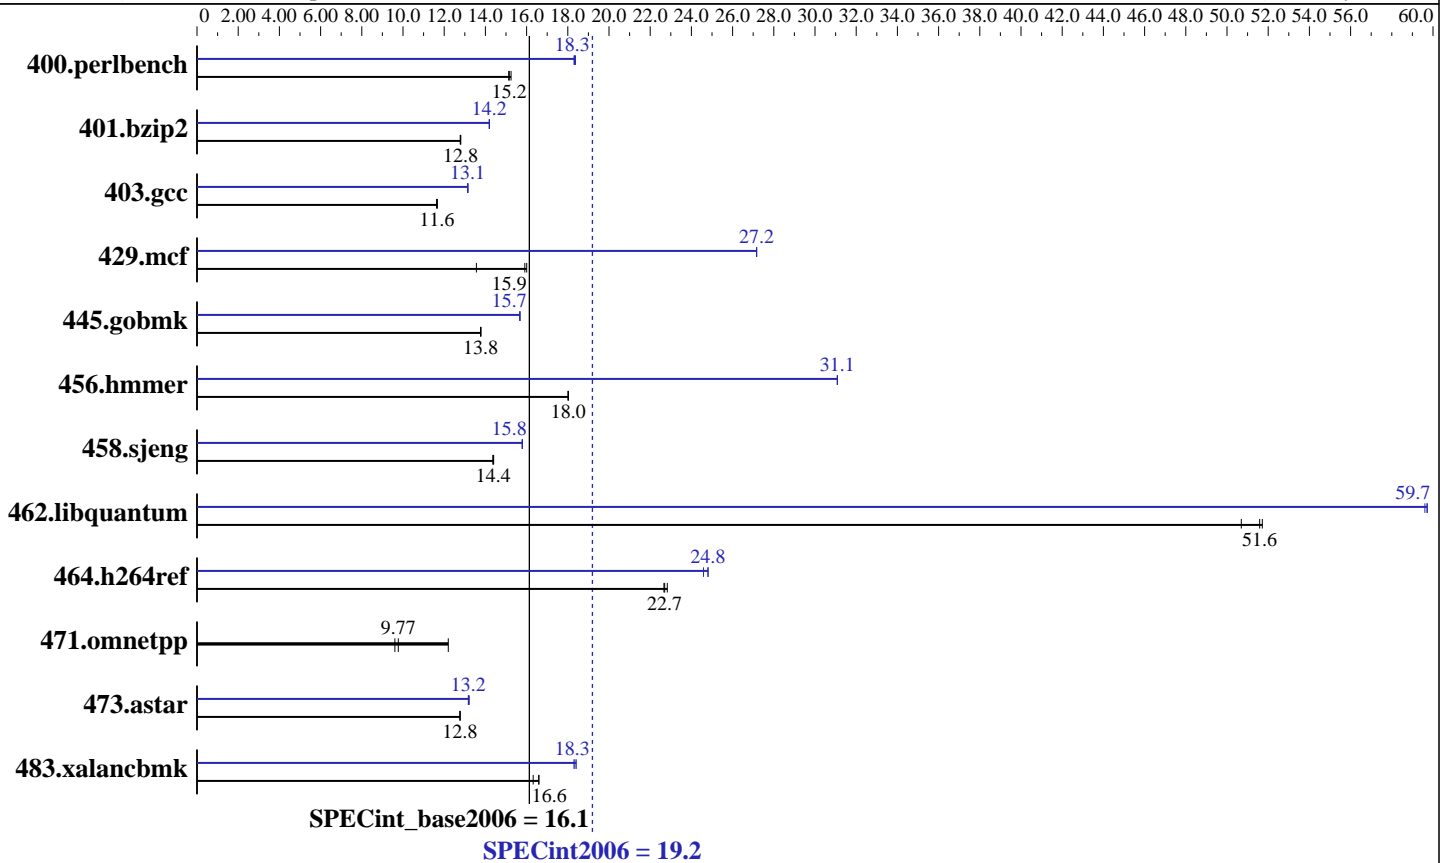

Hardware

CPU Name: AMD Opteron 8384
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core
 L3 Cache: 6 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16 x 4 GB DDR2-6400 ECC)
 Disk Subsystem: 1 x 73 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 7.2
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 32/64-bit
 Peak Pointers: 32/64-bit
 Other Software: binutils 2.18, 32-bit and 64-bit libhugetlbfs libraries, SmartHeap 8.1 32-bit Library for Linux



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 19.2

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint_base2006 = 16.1

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: May-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	646	15.1	644	15.2	641	15.2	533	18.3	532	18.4	534	18.3
401.bzip2	754	12.8	754	12.8	755	12.8	680	14.2	680	14.2	680	14.2
403.gcc	692	11.6	691	11.6	690	11.7	612	13.1	612	13.1	612	13.1
429.mcf	573	15.9	672	13.6	570	16.0	336	27.2	336	27.2	336	27.2
445.gobmk	762	13.8	761	13.8	762	13.8	669	15.7	670	15.7	669	15.7
456.hammer	517	18.0	518	18.0	518	18.0	300	31.1	300	31.1	300	31.1
458.sjeng	842	14.4	842	14.4	840	14.4	766	15.8	766	15.8	767	15.8
462.libquantum	401	51.7	402	51.6	409	50.7	347	59.7	348	59.6	347	59.7
464.h264ref	969	22.8	976	22.7	975	22.7	892	24.8	892	24.8	900	24.6
471.omnetpp	651	9.61	640	9.77	512	12.2	651	9.61	640	9.77	512	12.2
473.astar	550	12.8	550	12.8	550	12.8	533	13.2	533	13.2	531	13.2
483.xalancbmk	416	16.6	416	16.6	423	16.3	375	18.4	376	18.3	377	18.3

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores

General Notes

The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=14336 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages

Environment variables set by runspec before the start of the run:
LD_LIBRARY_PATH to "/cpu2006/pgi72/linux_lib32"
PGI_HUGE_PAGES = "14336"
SPEC_DIR = "/cpu2006"
NCPUS = "16"

Processor Performance States Disabled in BIOS
Memory ChipKill Disabled in BIOS



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 19.2

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint_base2006 = 16.1

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: May-2008

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Base Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 403.gcc: -DSPEC_CPU_LP64
 429.mcf: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mloop32
 -Mconcur=innermost -Mfprelaxed -Mipa=fast -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mloop32
 -Mfprelaxed --zc_eh -Mipa=fast -Mipa=inline:10 -tp barcelona-32
 -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:8

C++ benchmarks:

-Mipa=jobs:8



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 19.2

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint_base2006 = 16.1

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
 401.bzip2: -DSPEC_CPU_LP64
 445.gobmk: -DSPEC_CPU_LP64
 456.hmmer: -DSPEC_CPU_LP64
 458.sjeng: -DSPEC_CPU_LP64
 462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
 464.h264ref: -DSPEC_CPU_LP64
 483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=inline(pass 2)
 -Mvect=cachesize:6291456 -fastsse -O4 -Msmartalloc=huge
 -Mnovect -Mnounroll -Mfprelaxed -tp barcelona-64
 -Bstatic_pgi

401.bzip2: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mvect=cachesize:6291456 -fastsse -O4 -Msmartalloc=huge
 -Mprefetch=t0 -Mnounroll -tp barcelona-64 -Bstatic_pgi

403.gcc: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse
 -Msmartalloc=huge -Mprefetch=t0 -Mnodalign -Mloop32
 -Mfprelaxed -tp barcelona-32 -Bstatic_pgi

429.mcf: -Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
 -Mipa=fast -Mipa=inline:1 -tp barcelona-32 -Bstatic_pgi

445.gobmk: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mvect=cachesize:6291456 -fastsse -O4 -Msmartalloc=huge
 -Mnovect -Mfprelaxed -tp barcelona-64 -Bstatic_pgi

456.hmmer: -Mvect=cachesize:6291456 -fastsse -Mvect=partial
 -Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0
 -Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline
 -tp barcelona-64 -Bstatic_pgi

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 19.2

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint_base2006 = 16.1

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: May-2008

Peak Optimization Flags (Continued)

458.sjeng: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:1(pass 2) -Mipa=noarg(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8
-Msmartalloc=huge -Mpfetch=distance:8 -Mconcur=innermost
-Mconcur=noaltcode -Mfprelaxed -Mipa=fast -Mipa=noarg
-tp barcelona-64 -Bstatic_pgi

464.h264ref: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse
-O4 -Msmartalloc=huge -Msafeptr=global -Mloop32
-Mfprelaxed --zc_eh -tp barcelona-32 -Bstatic_pgi

483.xalancbmk: -Mvect=cachesize:6291456 --zc_eh -fastsse -O4 -Mfprelaxed
-Msmartalloc -Mipa=fast -Mipa=inline -tp barcelona-32
-Bstatic_pgi -lsmartheap

Peak Other Flags

C benchmarks (except as noted below):

-Mipa=jobs:8(pass 2)

401.bzip2: No flags used

C++ benchmarks (except as noted below):

-Mipa=jobs:8(pass 2)

483.xalancbmk: -Mipa=jobs:8 -L/proj/qa/smartheap/SmartHeap_8.1/lib

The flags file that was used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.00.html

You can also download the XML flags source by saving the following link:

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.20090713.00.xml



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 19.2

IBM BladeCenter LS42 (AMD Opteron 8384)

SPECint_base2006 = 16.1

CPU2006 license: 11

Test date: Nov-2008

Test sponsor: IBM Corporation

Hardware Availability: Nov-2008

Tested by: IBM Corporation

Software Availability: May-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 21:08:24 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 9 December 2008.