



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7420, 2.13 GHz)

SPECint®2006 = 19.2

SPECint_base2006 = 16.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

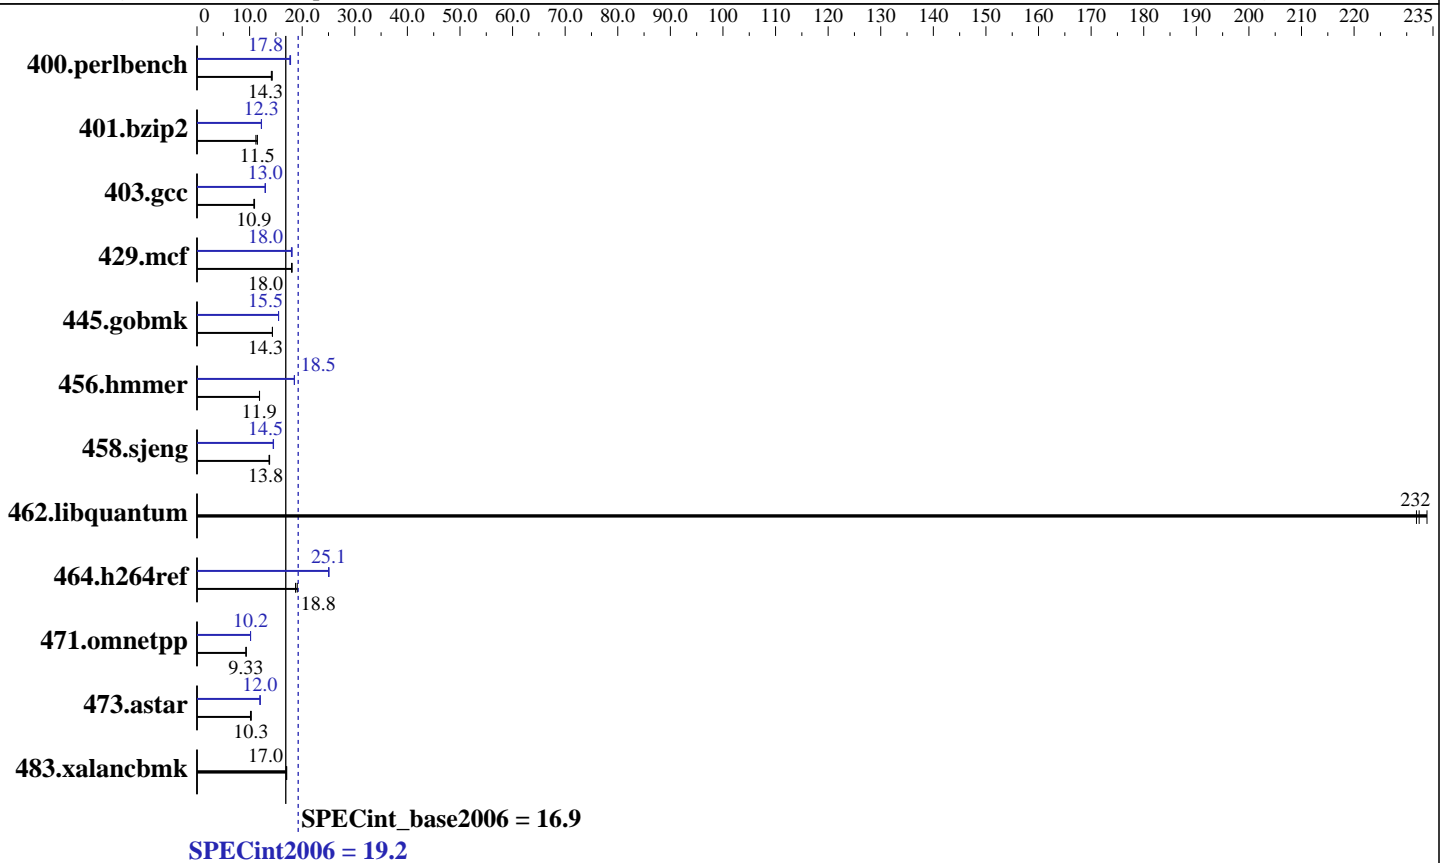

Hardware

CPU Name: Intel Xeon E7420
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 2133
 FPU: Integrated
 CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 6 MB I+D on chip per chip, 3 MB shared / 2 cores
 L3 Cache: 8 MB I+D on chip per chip
 Other Cache: None
 Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x73.2 GB SAS, 15000RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080730 Package ID: l_cproc_b_11.0.044
 Auto Parallel: Yes
 File System: ext2
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7420, 2.13 GHz)

SPECint2006 = 19.2

SPECint_base2006 = 16.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Nov-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	685	14.3	685	14.3	691	14.1	549	17.8	550	17.8	553	17.7
401.bzip2	862	11.2	842	11.5	841	11.5	789	12.2	787	12.3	787	12.3
403.gcc	743	10.8	736	10.9	741	10.9	620	13.0	621	13.0	620	13.0
429.mcf	508	18.0	505	18.0	505	18.1	505	18.1	508	18.0	505	18.0
445.gobmk	731	14.3	731	14.3	731	14.3	677	15.5	677	15.5	676	15.5
456.hammer	785	11.9	784	11.9	785	11.9	503	18.5	504	18.5	504	18.5
458.sjeng	878	13.8	876	13.8	883	13.7	834	14.5	832	14.6	834	14.5
462.libquantum	89.2	232	89.4	232	88.6	234	89.2	232	89.4	232	88.6	234
464.h264ref	1161	19.1	1180	18.8	1181	18.7	882	25.1	885	25.0	883	25.1
471.omnetpp	669	9.34	670	9.33	670	9.33	614	10.2	614	10.2	614	10.2
473.astar	682	10.3	690	10.2	683	10.3	585	12.0	586	12.0	585	12.0
483.xalancbmk	404	17.1	406	17.0	406	17.0	404	17.1	406	17.0	406	17.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"

Platform Notes

Bios settings:
Hardware Prefetcher: Enabled
Adjacent Cache Line Prefetch: Enabled

General Notes

The NEC Express5800/R140a-4(Intel Xeon E7420) and the Bull NovaScale R480 E1(Intel Xeon E7420, 2.13 GHz) models are electronically equivalent. The results have been measured on a NEC Express5800/R140a-4(Intel Xeon E7420) model.

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7420, 2.13 GHz)

SPECint2006 = 19.2

SPECint_base2006 = 16.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Nov-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel
-par-runtime-control -opt-prefetch
C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc
401.bzip2: /opt/intel/Compiler/11.0/044/bin/intel64/icc
-L/opt/intel/Compiler/11.0/044/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/044/ipp/em64t/include
456.hmmer: /opt/intel/Compiler/11.0/044/bin/intel64/icc
-L/opt/intel/Compiler/11.0/044/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/044/ipp/em64t/include
C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7420, 2.13 GHz)

SPECint2006 = 19.2

SPECint_base2006 = 16.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Nov-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -auto-ilp32 -opt-prefetch
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7420, 2.13 GHz)

SPECint2006 = 19.2

SPECint_base2006 = 16.9

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: NEC Corporation

Test date: Nov-2008
Hardware Availability: Nov-2008
Software Availability: Nov-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.20090713.html>
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revD.20090713.xml>
<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:57:12 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 6 January 2009.