



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.  
NTT Tytan S8 Series

**SPECfp®\_rate2006 = 65.4**  
**SPECfp\_rate\_base2006 = 61.8**

CPU2006 license: 9013


Test date: Dec-2008

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

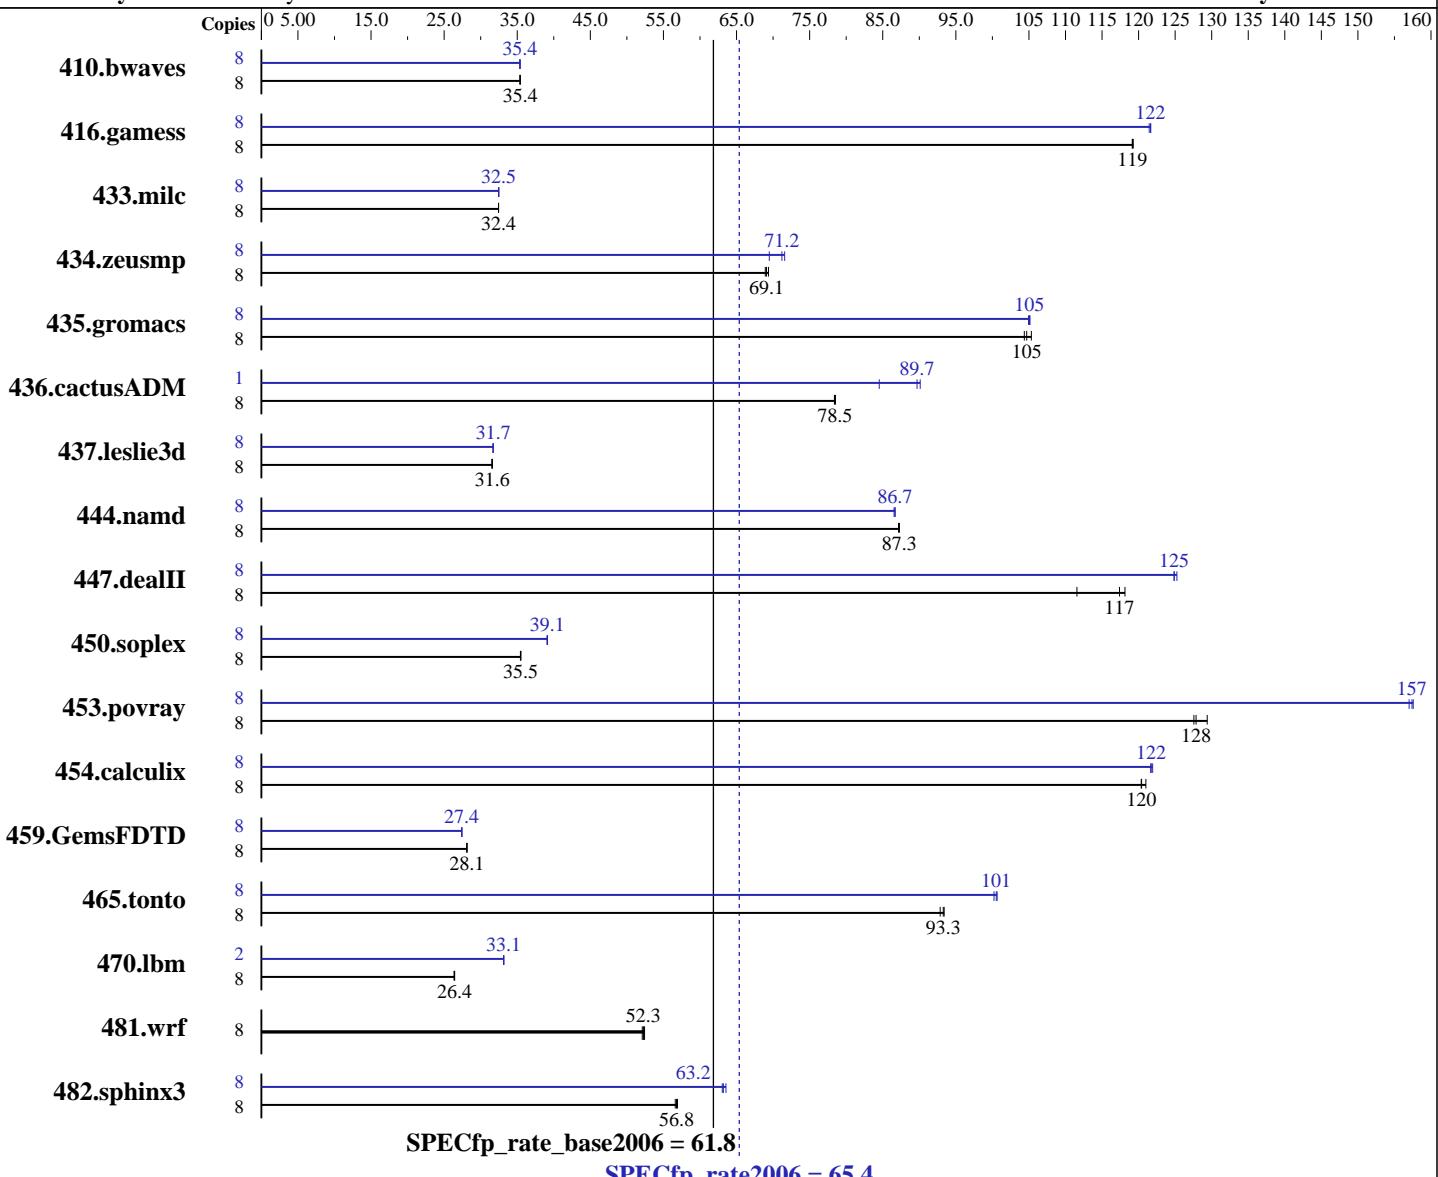

## Hardware

CPU Name: Intel Xeon E5405  
CPU Characteristics: 2 GHz, 2x6 MB P2 shared, 1333 MHz System Bus  
CPU MHz: 2000  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores

## Software

Operating System: SuSe Linux SLES10 SP1, Kernel 2.6.16.60-0.21-smp  
Compiler: Intel C++ and Fortran Compiler 11.0 for Linux Build 20080930 Package ID: l\_cproc\_p\_11.0.066, l\_cprof\_p\_11.0.066  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Run level 3 (multi-user)  
Base Pointers: 64-bit  
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECfp\_rate2006 = 65.4**

NTT Tytan S8 Series

**SPECfp\_rate\_base2006 = 61.8**

CPU2006 license: 9013

Test date: Dec-2008

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

L3 Cache:	None	Other Software:	Microquill SmartHeap V8.1
Other Cache:	None		Binutils 2.18.50.0.7.20080502
Memory:	16 GB (4x4GB)		
Disk Subsystem:	300 GB SATA, 7200RPM		
Other Hardware:	None		

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	3070	35.4	3075	35.4	<b>3070</b>	<b>35.4</b>	8	<b>3074</b>	<b>35.4</b>	3076	35.3	3070	35.4
416.gamess	8	<b>1314</b>	<b>119</b>	1315	119	1313	119	8	<b>1288</b>	<b>122</b>	1288	122	1290	121
433.milc	8	2264	32.4	2263	32.5	<b>2264</b>	<b>32.4</b>	8	<b>2262</b>	<b>32.5</b>	2262	32.5	<b>2262</b>	<b>32.5</b>
434.zeusmp	8	1049	69.4	<b>1054</b>	<b>69.1</b>	1056	68.9	8	1017	71.6	1048	69.5	<b>1022</b>	<b>71.2</b>
435.gromacs	8	<b>546</b>	<b>105</b>	542	105	547	104	8	543	105	<b>544</b>	<b>105</b>	544	105
436.cactusADM	8	1217	78.5	1220	78.4	<b>1219</b>	<b>78.5</b>	1	<b>133</b>	<b>89.7</b>	133	90.1	141	84.5
437.leslie3d	8	2379	31.6	<b>2380</b>	<b>31.6</b>	2386	31.5	8	2371	31.7	<b>2371</b>	<b>31.7</b>	2374	31.7
444.namd	8	736	87.2	735	87.3	<b>735</b>	<b>87.3</b>	8	741	86.6	740	86.7	<b>740</b>	<b>86.7</b>
447.dealII	8	775	118	<b>780</b>	<b>117</b>	820	112	8	731	125	<b>733</b>	<b>125</b>	733	125
450.soplex	8	<b>1881</b>	<b>35.5</b>	1883	35.4	1879	35.5	8	1704	39.1	1707	39.1	<b>1707</b>	<b>39.1</b>
453.povray	8	329	129	<b>333</b>	<b>128</b>	334	128	8	270	158	271	157	<b>270</b>	<b>157</b>
454.calculix	8	<b>548</b>	<b>120</b>	545	121	548	120	8	543	122	541	122	<b>542</b>	<b>122</b>
459.GemsFDTD	8	<b>3019</b>	<b>28.1</b>	3017	28.1	3022	28.1	8	3096	27.4	<b>3096</b>	<b>27.4</b>	3095	27.4
465.tonto	8	843	93.4	<b>844</b>	<b>93.3</b>	848	92.9	8	782	101	785	100	<b>783</b>	<b>101</b>
470.lbm	8	4171	26.4	<b>4160</b>	<b>26.4</b>	4158	26.4	2	829	33.1	<b>829</b>	<b>33.1</b>	828	33.2
481.wrf	8	1715	52.1	<b>1710</b>	<b>52.3</b>	1705	52.4	8	1715	52.1	<b>1710</b>	<b>52.3</b>	1705	52.4
482.sphinx3	8	<b>2746</b>	<b>56.8</b>	2739	56.9	2754	56.6	8	<b>2473</b>	<b>63.0</b>	<b>2467</b>	<b>63.2</b>	2453	63.6

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
taskset was used to bind processes to cores except  
for 436.cactusADM peak  
OMP\_NUM\_THREADS set to number of processors  
KMP\_AFFINITY set to "physical,0"  
KMP\_STACKSIZE set to 64M

## Base Compiler Invocation

C benchmarks:  
icc

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECfp\_rate2006 = 65.4**

NTT Tytan S8 Series

**SPECfp\_rate\_base2006 = 61.8**

CPU2006 license: 9013

Test date: Dec-2008

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

## Base Compiler Invocation (Continued)

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Base Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.games: -DSPEC_CPU_LP64
    433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
    444.namd: -DSPEC_CPU_LP64
    447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
    453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
    465.tonto: -DSPEC_CPU_LP64
    470.lbm: -DSPEC_CPU_LP64
    481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64
```

## Base Optimization Flags

C benchmarks:

-xSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Fortran benchmarks:

-xSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECfp\_rate2006 = 65.4**

NTT Tytan S8 Series

**SPECfp\_rate\_base2006 = 61.8**

CPU2006 license: 9013

Test date: Dec-2008

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

## Peak Compiler Invocation

C benchmarks:

icc

C++ benchmarks:

icpc

Fortran benchmarks:

ifort

Benchmarks using both Fortran and C:

icc ifort

## Peak Portability Flags

```
410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
  433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
  444.namd: -DSPEC_CPU_LP64
  447.dealII: -DSPEC_CPU_LP64
  453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
  465.tonto: -DSPEC_CPU_LP64
  470.lbm: -DSPEC_CPU_LP64
  481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
```

## Peak Optimization Flags

C benchmarks:

```
433.milc: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
           -no-prec-div -static -fno-alias
```

```
470.lbm: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch
           -auto-ilp32
```

```
482.sphinx3: -m32 -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2
```

C++ benchmarks:

```
444.namd: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
           -no-prec-div -static -fno-alias -auto-ilp32
```

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECfp\_rate2006 = 65.4**

NTT Tytan S8 Series

**SPECfp\_rate\_base2006 = 61.8**

CPU2006 license: 9013

Test date: Dec-2008

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

## Peak Optimization Flags (Continued)

447.dealII: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -ansi-alias -scalar-rep

450.soplex: -m32 -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3

453.povray: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSSE3 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -Obo -ansi-alias  
-scalar-rep

434.zeusmp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static

437.leslie3d: -m32 -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -Obo -opt-prefetch

465.tonto: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -opt-prefetch -auto-ilp32

436.cactusADM: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3  
-no-prec-div -static -unroll2 -opt-prefetch -parallel  
-auto-ilp32

454.calculix: -xSSSE3 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.03.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-fp-linux64-revA.20090710.03.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

SPECfp\_rate2006 = 65.4

NTT Tytan S8 Series

SPECfp\_rate\_base2006 = 61.8

CPU2006 license: 9013

Test date: Dec-2008

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:47:25 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 January 2009.