



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp®_rate2006 = 25.6

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 24.4

CPU2006 license: 6


Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Fujitsu Limited

Software Availability: Oct-2008

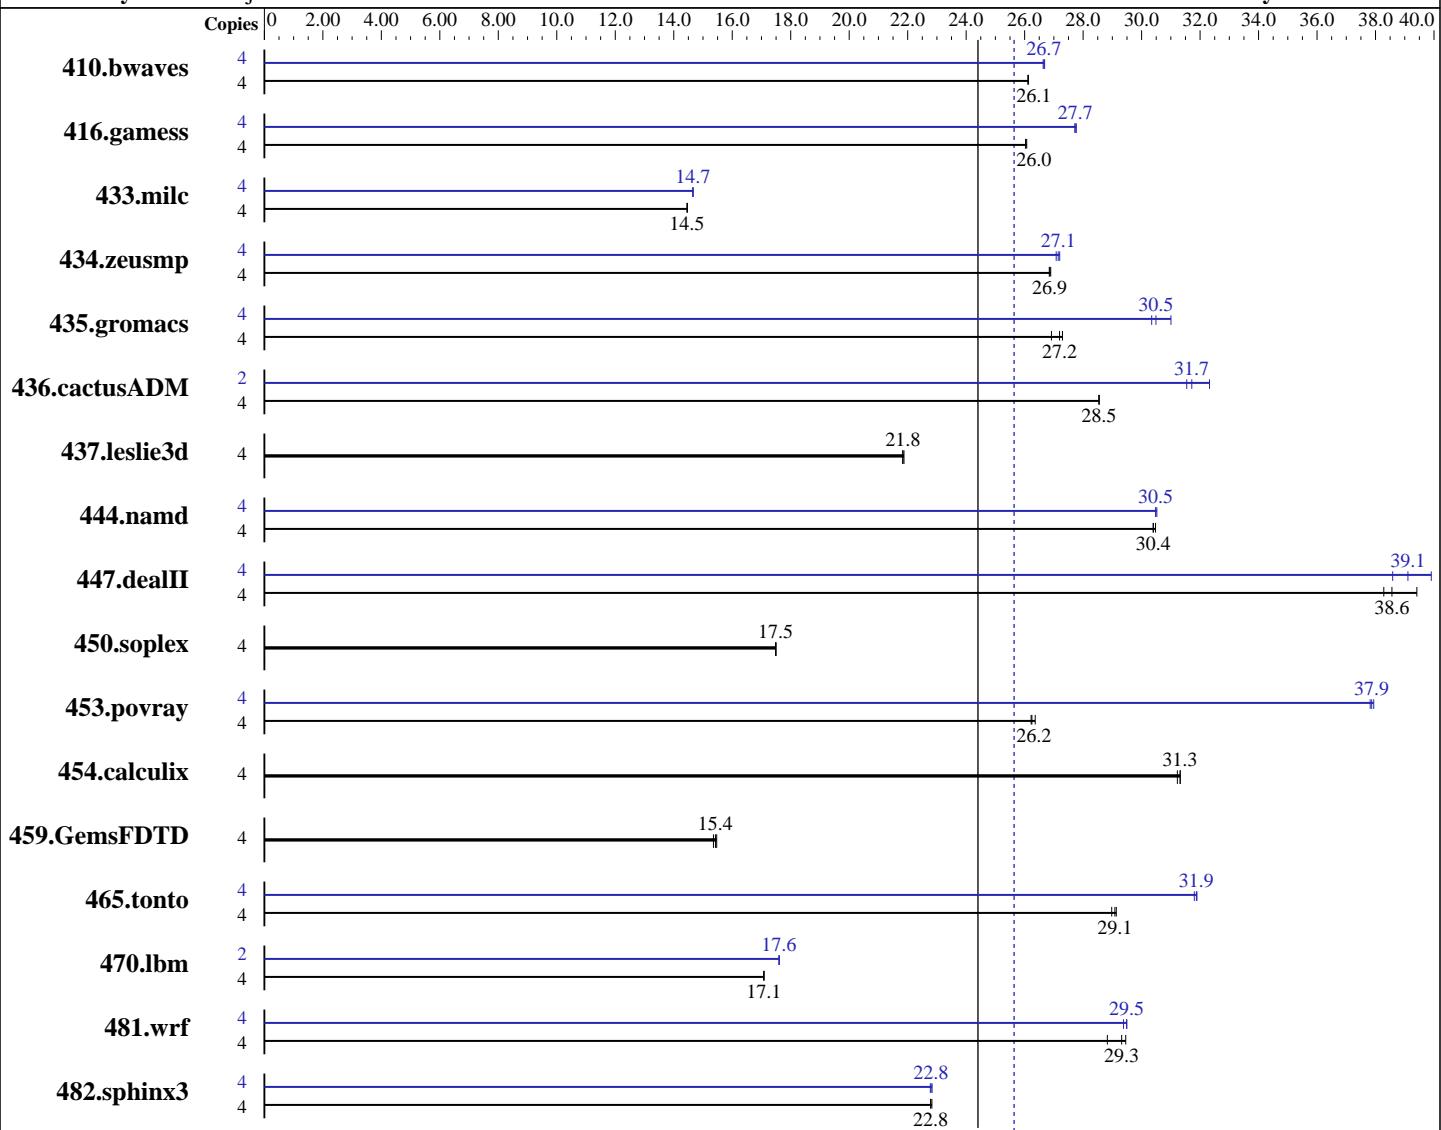

Hardware

CPU Name: SPARC64 VII
 CPU Characteristics: 2 Cores
 CPU MHz: 2520
 FPU: Integrated
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 5 MB I+D on chip per chip

Software

Operating System: Solaris 10 10/08
 Compiler: Sun Studio 12 with patches
 124861-08, 124863-06, 124867-07, 127143-03,
 127000-05, 127001-01
 (see patch information below)
 Auto Parallel: No
 File System: ufs
 System State: Default
 Base Pointers: 32-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M3000

SPECfp_rate2006 = 25.6

SPECfp_rate_base2006 = 24.4

CPU2006 license: 6

Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Fujitsu Limited

Software Availability: Oct-2008

L3 Cache: None
 Other Cache: None
 Memory: 16 GB (2 GB x 8), 2-way interleaved
 Disk Subsystem: 73 GB 10,000 RPM Fujitsu MAY2073RC SAS
 Other Hardware: None

Peak Pointers: 32-bit
 Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	4	2081	26.1	2081	26.1	2081	26.1	4	2041	26.6	2037	26.7	2039	26.7
416.gamess	4	3008	26.0	3008	26.0	3004	26.1	4	2824	27.7	2821	27.8	2826	27.7
433.milc	4	2540	14.5	2539	14.5	2540	14.5	4	2506	14.7	2504	14.7	2506	14.7
434.zeusmp	4	1354	26.9	1355	26.9	1356	26.8	4	1338	27.2	1341	27.1	1344	27.1
435.gromacs	4	1061	26.9	1050	27.2	1046	27.3	4	921	31.0	941	30.3	937	30.5
436.cactusADM	4	1674	28.5	1675	28.5	1675	28.5	2	758	31.5	754	31.7	739	32.3
437.leslie3d	4	1722	21.8	1719	21.9	1722	21.8	4	1722	21.8	1719	21.9	1722	21.8
444.namd	4	1053	30.5	1055	30.4	1055	30.4	4	1051	30.5	1052	30.5	1052	30.5
447.dealII	4	1195	38.3	1161	39.4	1187	38.6	4	1147	39.9	1186	38.6	1170	39.1
450.soplex	4	1908	17.5	1908	17.5	1907	17.5	4	1908	17.5	1908	17.5	1907	17.5
453.povray	4	812	26.2	807	26.4	811	26.2	4	563	37.8	562	37.9	561	37.9
454.calculix	4	1054	31.3	1054	31.3	1057	31.2	4	1054	31.3	1054	31.3	1057	31.2
459.GemsFDTD	4	2763	15.4	2744	15.5	2751	15.4	4	2763	15.4	2744	15.5	2751	15.4
465.tonto	4	1353	29.1	1351	29.1	1358	29.0	4	1235	31.9	1238	31.8	1234	31.9
470.lbm	4	3218	17.1	3216	17.1	3217	17.1	2	1561	17.6	1561	17.6	1561	17.6
481.wrf	4	1550	28.8	1517	29.5	1524	29.3	4	1521	29.4	1515	29.5	1515	29.5
482.sphinx3	4	3421	22.8	3415	22.8	3421	22.8	4	3423	22.8	3419	22.8	3414	22.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio compiler patches are available at

http://developers.sun.com/sunstudio/downloads/patches/ss12_patches.jsp

Submit Notes

Processes were assigned to specific processors using 'pbind' commands. The config file option 'submit' was used, along with a list of processors in the 'BIND' variable, to generate the pbind commands. (For details, please see the config file.)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 25.6

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 24.4

CPU2006 license: 6

Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Fujitsu Limited

Software Availability: Oct-2008

Operating System Notes

Shell Environments:
Default setting.

System Tunables:
(/etc/system parameters)

```
tune_t_fsflushr=10  
    Controls how many seconds elapse between runs of the  
    page flush daemon, fsflush.  
autoup=600  
    Causes pages older than the listed number of seconds to  
    be written by fsflush.  
bufhwm=3000  
    Memory byte limit for caching I/O buffers.  
segmap_percent=1  
    Set maximum percent memory for file system cache.
```

Other System Settings:

The webconsole service was turned off using svcadm disable webconsole.

Platform Notes

Memory is 2-way interleaved by filling all slots with the same capacity DIMMs.

This result is measured on a Fujitsu SPARC Enterprise M3000 Server.
Note that the Fujitsu SPARC Enterprise M3000 and Sun SPARC Enterprise M3000 are electrically equivalent.

Base Compiler Invocation

C benchmarks:
cc

C++ benchmarks:
CC

Fortran benchmarks:
f90

Benchmarks using both Fortran and C:
cc f90



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M3000

SPECfp_rate2006 = 25.6

SPECfp_rate_base2006 = 24.4

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Jan-2009

Software Availability: Oct-2008

Base Optimization Flags

C benchmarks:

```
-fast -fma=fused -xipo=2 -xpagemap=4M -xprefetch_level=1  
-xalias_level=std -xprefetch_auto_type=indirect_array_access
```

C++ benchmarks:

```
-library=stlport4 -fast -fma=fused -xipo=2 -xpagemap=4M  
-xprefetch_level=1 -xalias_level=compatible
```

Fortran benchmarks:

```
-fast -fma=fused -xipo=2 -xpagemap=4M -xprefetch_level=1
```

Benchmarks using both Fortran and C:

```
-fast(cc) -fast(f90) -fma=fused -xipo=2 -xpagemap=4M  
-xprefetch_level=1 -xalias_level=std  
-xprefetch_auto_type=indirect_array_access
```

Base Other Flags

C benchmarks:

```
-xjobs=4
```

C++ benchmarks:

```
-xjobs=4
```

Fortran benchmarks:

```
-xjobs=4
```

Benchmarks using both Fortran and C:

```
-xjobs=4
```

Peak Compiler Invocation

C benchmarks:

```
cc
```

C++ benchmarks:

```
CC
```

Fortran benchmarks:

```
f90
```

Benchmarks using both Fortran and C:

```
cc f90
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise M3000

SPECfp_rate2006 = 25.6

SPECfp_rate_base2006 = 24.4

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Fujitsu Limited

Test date: Sep-2008

Hardware Availability: Jan-2009

Software Availability: Oct-2008

Peak Optimization Flags

C benchmarks:

```
433.milc: -fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=2  
          -fsimple=1 -xprefetch_auto_type=indirect_array_access  
          -W2,-Ainline:rs=400 -xalias_level=std
```

```
470.lbm: -fast -fma=fused -xipo=2 -xpagesize=4M -xprefetch_level=3  
          -xvector -xarch=generic
```

```
482.sphinx3: -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
             -xpagesize=4M -xinline= -xprefetch=no -xalias_level=strong  
             -lfast -ll2amm
```

C++ benchmarks:

```
444.namd: -library=stlport4 -fast -fma=fused -xipo=2 -xpagesize=4M  
          -xdepend -xalias_level=compatible
```

```
447.dealII: -library=stlport4 -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
             -xpagesize=4M -xdepend -xalias_level=compatible -xrestrict  
             -xprefetch_level=2 -xprefetch_auto_type=indirect_array_access
```

```
450.soplex: basepeak = yes
```

```
453.povray: -library=stlport4 -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
             -xpagesize=4M -xdepend -xalias_level=compatible
```

Fortran benchmarks:

```
410.bwaves: -fast -xipo=2 -xprefetch_level=2  
             -xprefetch_auto_type=indirect_array_access
```

```
416.gamess: -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -fma=fused -xipo=2  
             -xpagesize=4M
```

```
434.zeusmp: -fast -fma=fused -xipo=2 -xpagesize=4M -lmopt
```

```
437.leslie3d: basepeak = yes
```

```
459.GemsFDTD: basepeak = yes
```

```
465.tonto: -xprofile=collect:./feedback(pass 1)  
             -xprofile=use:./feedback(pass 2) -fast -xipo=2 -lfast
```

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 25.6

Sun SPARC Enterprise M3000

SPECfp_rate_base2006 = 24.4

CPU2006 license: 6

Test date: Sep-2008

Test sponsor: Sun Microsystems

Hardware Availability: Jan-2009

Tested by: Fujitsu Limited

Software Availability: Oct-2008

Peak Optimization Flags (Continued)

435.gromacs: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast(cc) -fast(f90)
-fma=fused -xipo=2 -xpagesize=4M -xinline= -xchip=generic
-fsimple=0

436.cactusADM: -fast(cc) -fast(f90) -fma=fused -xipo=2 -xppagesize=4M
-xprefetch_level=3 -xalias_level=std
-xprefetch_auto_type=indirect_array_access

454.calculix: basepeak = yes

481.wrf: -fast(cc) -fast(f90) -fma=fused -xipo=2 -xppagesize=4M
-xprefetch_level=2 -xalias_level=std -xprefetch_level=3
-xprefetch_auto_type=indirect_array_access

Peak Other Flags

C benchmarks:

-xjobs=4

C++ benchmarks:

-xjobs=4

Fortran benchmarks:

-xjobs=4

Benchmarks using both Fortran and C:

-xjobs=4

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-and-gccfss4.2.r3.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:13:41 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 February 2009.