



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7310, 1.60 GHz)

SPECint®_rate2006 = 132

SPECint_rate_base2006 = 131

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Dec-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

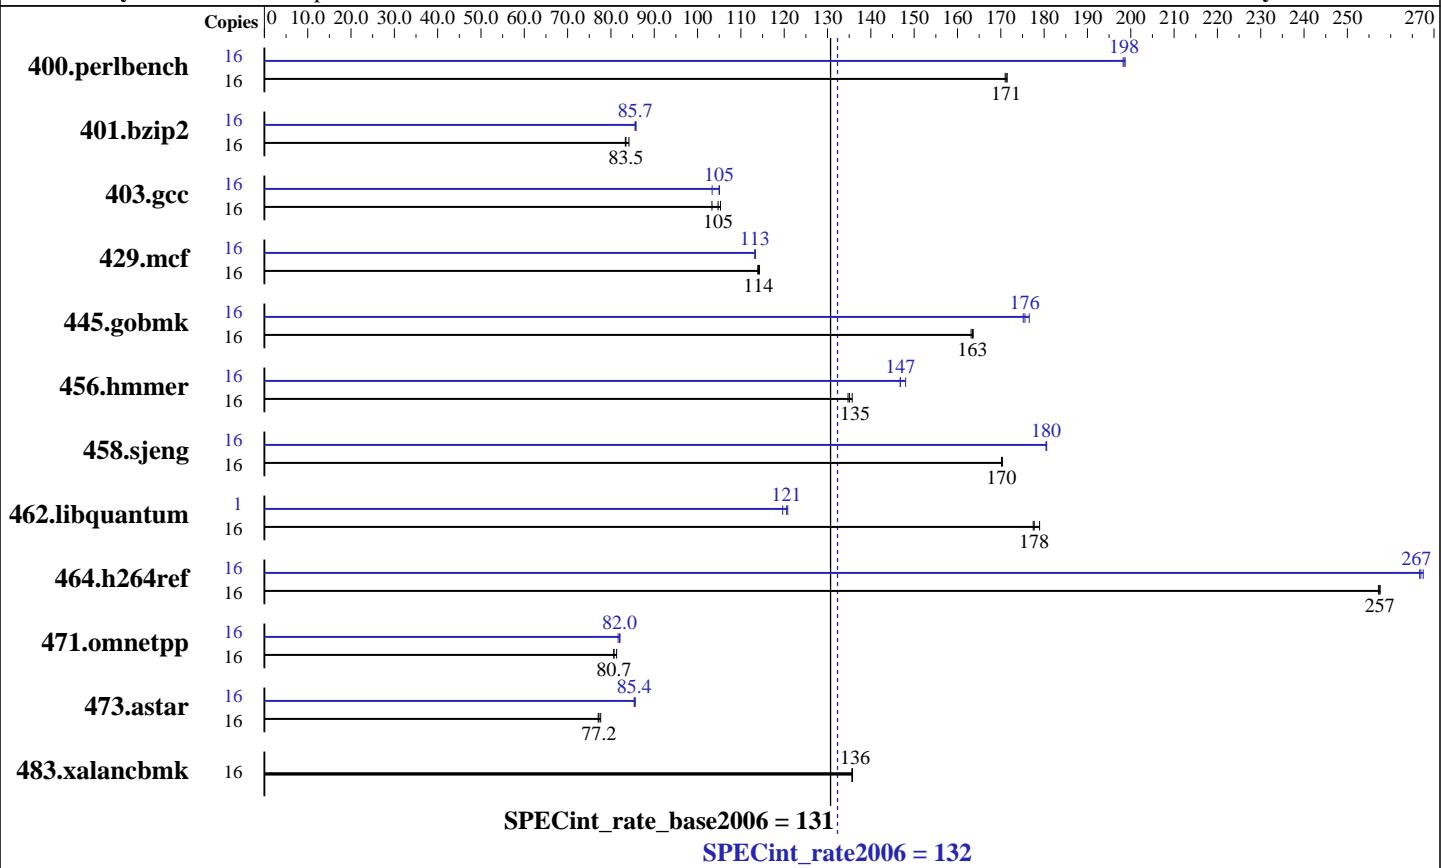

Hardware

CPU Name: Intel Xeon E7310
CPU Characteristics: 1066 MHz system bus
CPU MHz: 1600
FPU: Integrated
CPU(s) enabled: 16 cores, 4 chips, 4 cores/chip
CPU(s) orderable: 1,2,3,4 chips
Primary Cache: 32 KB I + 32 KB D on chip per core
Secondary Cache: 4 MB L1+D on chip per chip, 2 MB shared / 2 cores
L3 Cache: None
Other Cache: None
Memory: 32 GB (16x2 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
Disk Subsystem: 1x73.2 GB SAS, 15000 RPM
Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
Compiler: Intel C++ Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074
Auto Parallel: Yes
File System: ext2
System State: Run level 3 (multi-user)
Base Pointers: 32-bit
Peak Pointers: 32/64-bit
Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7310, 1.60 GHz)

SPECint_rate2006 = 132

SPECint_rate_base2006 = 131

CPU2006 license: 20

Test date: Dec-2008

Test sponsor: Bull SAS

Hardware Availability: Nov-2008

Tested by: NEC Corporation

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	912	171	914	171	913	171	16	789	198	787	199	788	198
401.bzip2	16	1850	83.5	1835	84.2	1853	83.3	16	1802	85.7	1799	85.8	1804	85.6
403.gcc	16	1230	105	1247	103	1223	105	16	1246	103	1226	105	1227	105
429.mcf	16	1277	114	1281	114	1279	114	16	1289	113	1289	113	1287	113
445.gobmk	16	1027	163	1029	163	1026	164	16	956	176	958	175	951	177
456.hammer	16	1100	136	1105	135	1108	135	16	1017	147	1008	148	1017	147
458.sjeng	16	1136	170	1138	170	1138	170	16	1073	180	1073	180	1072	181
462.libquantum	16	1853	179	1865	178	1868	177	1	172	121	171	121	173	120
464.h264ref	16	1375	257	1377	257	1375	258	16	1324	268	1326	267	1328	267
471.omnetpp	16	1230	81.3	1239	80.7	1240	80.7	16	1218	82.1	1220	82.0	1225	81.7
473.astar	16	1447	77.6	1454	77.2	1458	77.1	16	1312	85.6	1316	85.4	1315	85.4
483.xalancbmk	16	813	136	813	136	814	136	16	813	136	813	136	814	136

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 462.libquantum peak

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Platform Notes

Bios settings:
Hardware Prefetcher: Disabled
Adjacent Cache Line Prefetch: Disabled
FSB High Bandwidth Optimization: Disabled

General Notes

The NEC Express5800/R140a-4(Intel Xeon E7310) and
the Bull NovaScale R480 E1(Intel Xeon E7310, 1.60 GHz) models are electronically equivalent.
The results have been measured on a NEC Express5800/R140a-4(Intel Xeon E7310) model.



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7310, 1.60 GHz)

SPECint_rate2006 = 132

SPECint_rate_base2006 = 131

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Dec-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Base Compiler Invocation

C benchmarks:
 icc

C++ benchmarks:
 icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
 -xSSE3 -ipo -O3 -no-prec-div -static -inline-calloc
 -opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
 -xSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
 -L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:
 403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
 icc

401.bzip2: /opt/intel/Compiler/11.0/074/bin/intel64/icc
 -L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
 -I/opt/intel/Compiler/11.0/074/ipp/em64t/include

456.hmmr: /opt/intel/Compiler/11.0/074/bin/intel64/icc
 -L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
 -I/opt/intel/Compiler/11.0/074/ipp/em64t/include

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7310, 1.60 GHz)

SPECint_rate2006 = 132

SPECint_rate_base2006 = 131

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Dec-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Compiler Invocation (Continued)

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmmer: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSSE3 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

NovaScale R480 E1
(Intel Xeon E7310, 1.60 GHz)

SPECint_rate2006 = 132

SPECint_rate_base2006 = 131

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: NEC Corporation

Test date: Dec-2008

Hardware Availability: Nov-2008

Software Availability: Nov-2008

Peak Optimization Flags (Continued)

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:26:48 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 20 January 2009.