



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECint®2006 = 25.4**

NTT Tytan S8 Series

**SPECint\_base2006 = 22.3**

CPU2006 license: 9013


Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

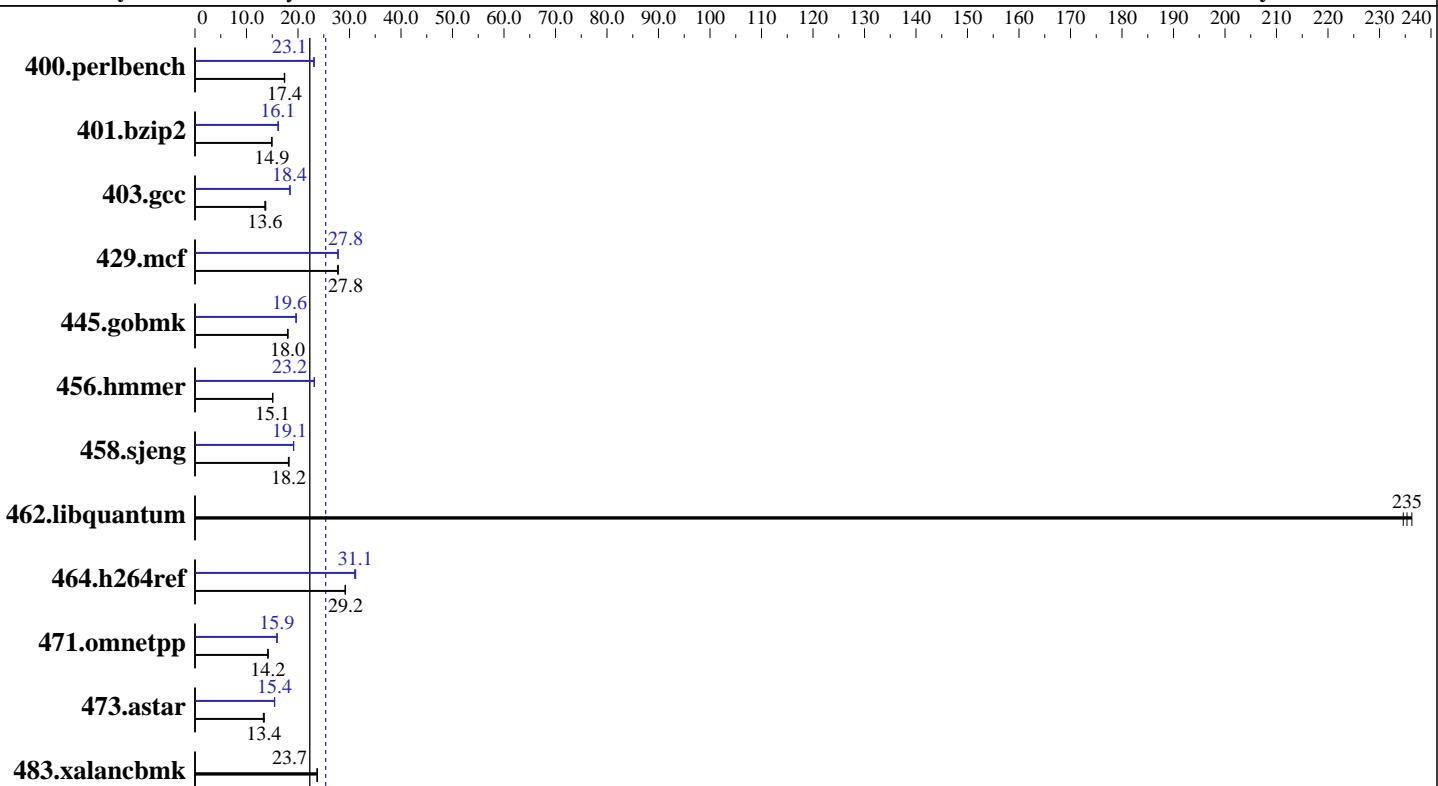

## Hardware

CPU Name: Intel Xeon E5430  
CPU Characteristics: 2.66 GHZ, 2x6 MB P2 shared, 1333 MHz System Bus  
CPU MHz: 2666  
FPU: Integrated  
CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
CPU(s) orderable: 2 chips  
Primary Cache: 32 KB I + 32 KB D on chip per core  
Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores  
L3 Cache: None  
Other Cache: None  
Memory: 16 GB (4 x 4GB DDR2-667 FBDIMM)  
Disk Subsystem: 300 GB SATA, 7200RPM  
Other Hardware: None

## Software

Operating System: SuSe Linux SLES10 SP1, Kernel 2.6.16.60-0.21-smp  
Compiler: Intel C++ Compiler 11.0 for Linux  
Build 20080930 Package ID: l\_cproc\_p\_11.0.066  
Auto Parallel: Yes  
File System: ReiserFS  
System State: Run level 3 (multi-user)  
Base Pointers: 32-bit  
Peak Pointers: 32/64-bit  
Other Software: Microquill SmartHeap V8.1  
Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECint2006 = 25.4**

NTT Tytan S8 Series

**SPECint\_base2006 = 22.3**

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	564	17.3	<b>562</b>	<b>17.4</b>	561	17.4	<b>424</b>	<b>23.1</b>	422	23.1	<b>423</b>	<b>23.1</b>
401.bzip2	649	14.9	646	14.9	<b>646</b>	<b>14.9</b>	<b>597</b>	<b>16.2</b>	<b>598</b>	<b>16.1</b>	598	16.1
403.gcc	<b>591</b>	<b>13.6</b>	592	13.6	586	13.7	<b>437</b>	<b>18.4</b>	437	18.4	437	18.4
429.mcf	329	27.7	<b>328</b>	<b>27.8</b>	328	27.8	<b>328</b>	<b>27.8</b>	<b>328</b>	<b>27.8</b>	329	27.8
445.gobmk	582	18.0	<b>582</b>	<b>18.0</b>	582	18.0	<b>534</b>	<b>19.6</b>	535	19.6	534	19.6
456.hmmer	619	15.1	618	15.1	<b>618</b>	<b>15.1</b>	<b>403</b>	<b>23.2</b>	402	23.2	403	23.2
458.sjeng	662	18.3	667	18.1	<b>665</b>	<b>18.2</b>	<b>632</b>	<b>19.1</b>	631	19.2	633	19.1
462.libquantum	88.3	235	<b>88.0</b>	<b>235</b>	87.7	236	88.3	235	<b>88.0</b>	<b>235</b>	87.7	236
464.h264ref	758	29.2	<b>758</b>	<b>29.2</b>	759	29.1	<b>711</b>	<b>31.1</b>	709	31.2	714	31.0
471.omnetpp	441	14.2	<b>441</b>	<b>14.2</b>	442	14.1	393	15.9	<b>392</b>	<b>15.9</b>	392	15.9
473.astar	522	13.4	529	13.3	<b>524</b>	<b>13.4</b>	<b>453</b>	<b>15.5</b>	455	15.4	<b>455</b>	<b>15.4</b>
483.xalancbmk	291	23.7	290	23.8	<b>291</b>	<b>23.7</b>	<b>291</b>	<b>23.7</b>	290	23.8	<b>291</b>	<b>23.7</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Base Compiler Invocation

C benchmarks:  
icc

C++ benchmarks:  
icpc

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -static -parallel  
-par-runtime-control -opt-prefetch

C++ benchmarks:  
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECint2006 = 25.4**

NTT Tytan S8 Series

**SPECint\_base2006 = 22.3**

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:

icpc

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32

401.bzip2: -DSPEC\_CPU\_LP64

456.hmmer: -DSPEC\_CPU\_LP64

462.libquantum: -DSPEC\_CPU\_LINUX

483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -auto-ilp32 -opt-prefetch  
-ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3

429.mcf: -xSSE4.1 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo  
-no-prec-div -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECint2006 = 25.4**

NTT Tytan S8 Series

**SPECint\_base2006 = 22.3**

CPU2006 license: 9013

Test date: Jan-2009

Test sponsor: NTT System S. A.

Hardware Availability: Dec-2008

Tested by: NTT System S. A.

Software Availability: Dec-2008

## Peak Optimization Flags (Continued)

456.hmmr: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll12  
-ansi-alias -auto-ilp32

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll14

462.libquantum: basepeak = yes

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -static -unroll12 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=block  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3  
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine  
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.html>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.xml>  
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml>



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.

**SPECint2006 = 25.4**

NTT Tytan S8 Series

**SPECint\_base2006 = 22.3**

**CPU2006 license:** 9013

**Test date:** Jan-2009

**Test sponsor:** NTT System S. A.

**Hardware Availability:** Dec-2008

**Tested by:** NTT System S. A.

**Software Availability:** Dec-2008

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 22:36:40 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 4 February 2009.