



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.
NTT Tytan S8 Series

SPECint[®]_rate2006 = 131
SPECint_rate_base2006 = 120

CPU2006 license: 9013


Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jan-2009

Hardware Availability: Dec-2008

Software Availability: Dec-2008

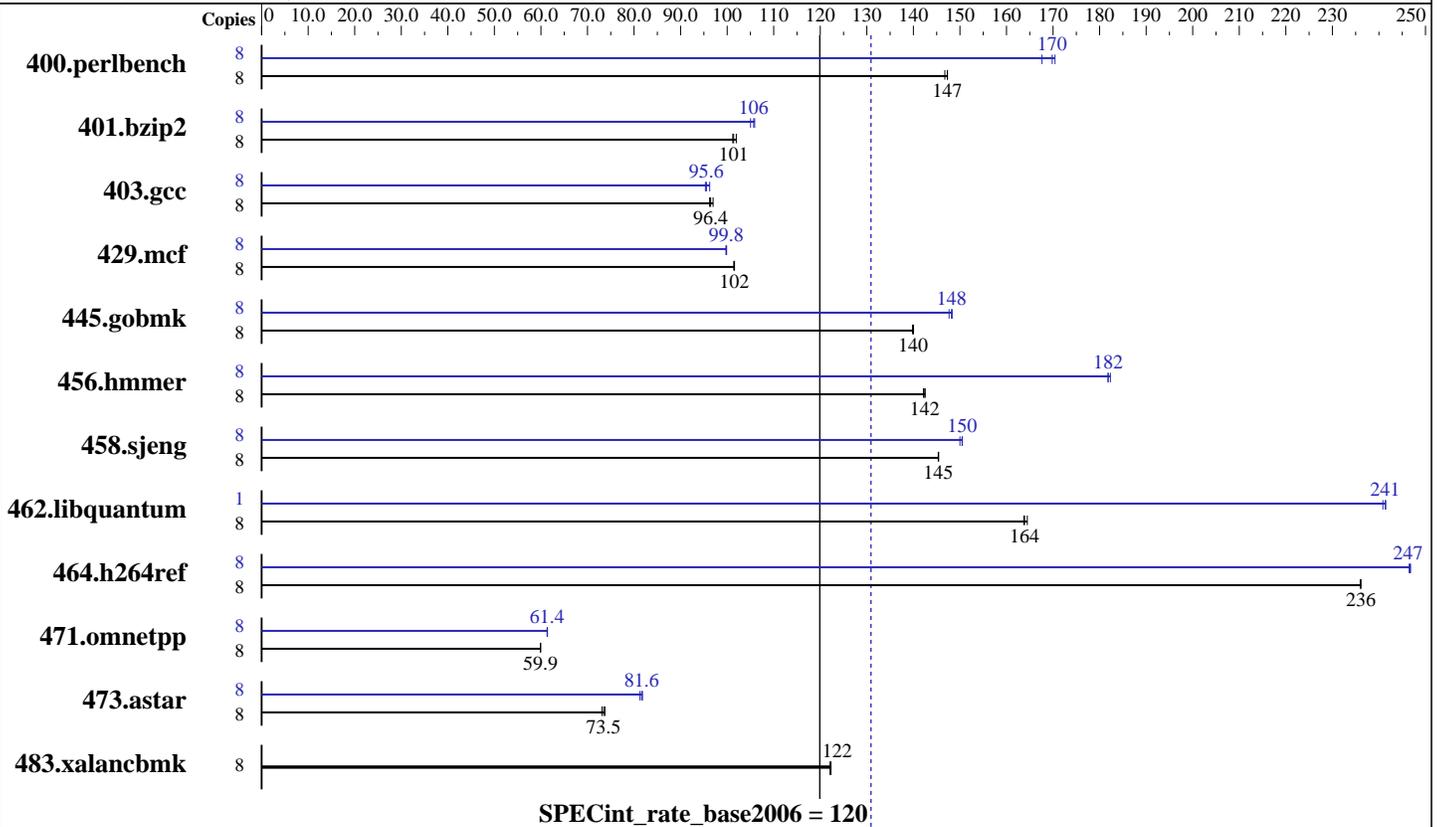

Hardware

CPU Name: Intel Xeon E5430
 CPU Characteristics: 2.66 GHz, 2x6 MB P2 shared, 1333 MHz System Bus
 CPU MHz: 2666
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 16 GB (4 x 4GB DDR2-667 FBDIMM)
 Disk Subsystem: 300 GB SATA, 7200RPM
 Other Hardware: None

Software

Operating System: SuSe Linux SLES10 SP1, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux
 Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.
NTT Tytan S8 Series

SPECint_rate2006 = 131
SPECint_rate_base2006 = 120

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	531	147	533	147	<u>531</u>	<u>147</u>	8	459	170	466	168	<u>460</u>	<u>170</u>
401.bzip2	8	<u>761</u>	<u>101</u>	757	102	763	101	8	735	105	<u>730</u>	<u>106</u>	729	106
403.gcc	8	669	96.2	<u>668</u>	<u>96.4</u>	664	97.0	8	676	95.3	669	96.3	<u>674</u>	<u>95.6</u>
429.mcf	8	<u>719</u>	<u>102</u>	718	102	719	101	8	730	99.9	731	99.7	<u>731</u>	<u>99.8</u>
445.gobmk	8	599	140	<u>600</u>	<u>140</u>	600	140	8	566	148	<u>566</u>	<u>148</u>	568	148
456.hammer	8	524	143	<u>524</u>	<u>142</u>	525	142	8	409	182	<u>410</u>	<u>182</u>	411	182
458.sjeng	8	<u>666</u>	<u>145</u>	666	145	666	145	8	<u>643</u>	<u>150</u>	643	150	645	150
462.libquantum	8	<u>1011</u>	<u>164</u>	1008	164	1012	164	1	<u>85.8</u>	<u>241</u>	86.0	241	85.8	241
464.h264ref	8	750	236	750	236	<u>750</u>	<u>236</u>	8	718	246	717	247	<u>718</u>	<u>247</u>
471.omnetpp	8	834	59.9	835	59.9	<u>834</u>	<u>59.9</u>	8	<u>815</u>	<u>61.4</u>	815	61.3	814	61.4
473.astar	8	<u>764</u>	<u>73.5</u>	768	73.1	762	73.7	8	686	81.8	691	81.3	<u>688</u>	<u>81.6</u>
483.xalancbmk	8	<u>452</u>	<u>122</u>	451	122	452	122	8	<u>452</u>	<u>122</u>	451	122	452	122

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 462.libquantum peak
OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.
NTT Tytan S8 Series

SPECint_rate2006 = 131
SPECint_rate_base2006 = 120

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc
401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc
456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:
icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:
400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.
NTT Tytan S8 Series

SPECint_rate2006 = 131
SPECint_rate_base2006 = 120

CPU2006 license: 9013
Test sponsor: NTT System S. A.
Tested by: NTT System S. A.

Test date: Jan-2009
Hardware Availability: Dec-2008
Software Availability: Dec-2008

Peak Optimization Flags (Continued)

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.html>
<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.html>



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NTT System S. A.
NTT Tytan S8 Series

SPECint_rate2006 = 131
SPECint_rate_base2006 = 120

CPU2006 license: 9013

Test sponsor: NTT System S. A.

Tested by: NTT System S. A.

Test date: Jan-2009

Hardware Availability: Dec-2008

Software Availability: Dec-2008

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.xml>

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:43:51 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 February 2009.