



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp®2006 = 21.5

ProLiant DL365 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.3

CPU2006 license: 3


Test sponsor: Hewlett-Packard Company

Test date: Dec-2008

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

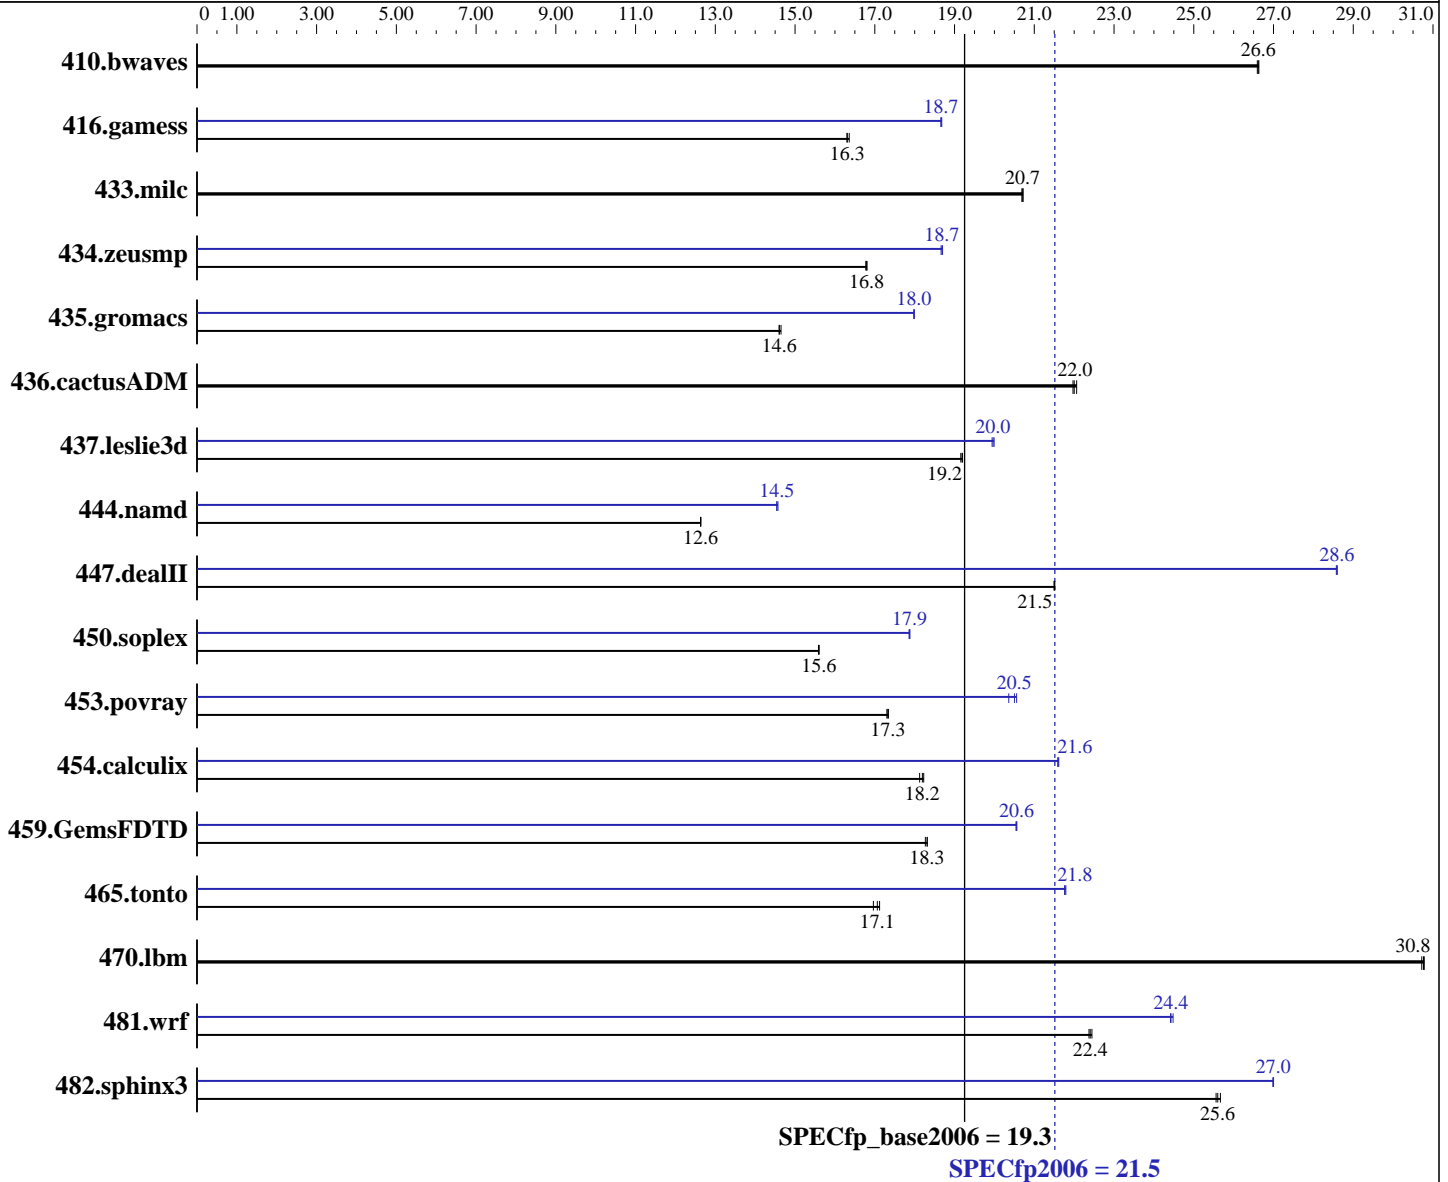

Hardware

CPU Name: AMD Opteron 2384
 CPU Characteristics:
 CPU MHz: 2700
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP1, Kernel 2.6.16.46-0.12-smp
 Compiler: PGI Server Complete Version 7.2 PathScale Compiler Suite Version 3.2
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = **21.5**

ProLiant DL365 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = **19.3**

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 32 GB (8x4 GB, PC2-6400P CL5)
Disk Subsystem: 1x72 GB 15 K SAS
Other Hardware: None

Other Software: binutils 2.17.50
32-bit and 64-bit libhugetlbfs libraries

Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	511	26.6	511	26.6	510	26.6	511	26.6	511	26.6	510	26.6
416.gamess	1197	16.4	1200	16.3	1201	16.3	1049	18.7	1049	18.7	1048	18.7
433.milc	443	20.7	443	20.7	444	20.7	443	20.7	443	20.7	444	20.7
434.zeusmp	543	16.8	542	16.8	542	16.8	487	18.7	488	18.7	487	18.7
435.gromacs	489	14.6	489	14.6	487	14.6	397	18.0	397	18.0	397	18.0
436.cactusADM	542	22.1	544	22.0	543	22.0	542	22.1	544	22.0	543	22.0
437.leslie3d	491	19.2	490	19.2	490	19.2	471	19.9	471	20.0	470	20.0
444.namd	635	12.6	635	12.6	635	12.6	552	14.5	550	14.6	551	14.5
447.dealII	532	21.5	532	21.5	532	21.5	400	28.6	400	28.6	400	28.6
450.soplex	535	15.6	535	15.6	535	15.6	467	17.9	466	17.9	467	17.9
453.povray	307	17.3	307	17.3	307	17.3	259	20.5	261	20.4	259	20.6
454.calculix	455	18.1	453	18.2	453	18.2	382	21.6	382	21.6	382	21.6
459.GemsFDTD	581	18.3	579	18.3	579	18.3	516	20.6	516	20.6	517	20.5
465.tonto	575	17.1	580	17.0	577	17.1	452	21.8	452	21.8	452	21.8
470.lbm	447	30.8	446	30.8	447	30.7	447	30.8	446	30.8	447	30.7
481.wrf	498	22.4	499	22.4	499	22.4	456	24.5	457	24.4	457	24.4
482.sphinx3	763	25.6	759	25.7	761	25.6	722	27.0	722	27.0	722	27.0

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

Environment stack size set to 'unlimited'
Max locked memory set to 2097152
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.
PGI_HUGE_PAGES set to 896.
Total number of huge pages available is 7168.
NCPUS set to number of cores



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.5

ProLiant DL365 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.3

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Platform Notes

BIOS configuration:
Power Regulator set to Static High Performance Mode

General Notes

Environment variables set by runspec before the start of the run:
HUGETLB_MORECORE = "yes"

Base Compiler Invocation

C benchmarks:
pgcc

C++ benchmarks:
pgcpp

Fortran benchmarks:
pgf95

Benchmarks using both Fortran and C:
pgcc pgf95

Base Portability Flags

```

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.deallI: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.5

ProLiant DL365 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.3

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Base Optimization Flags

C benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

C++ benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

Fortran benchmarks:

`-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc=huge
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

Benchmarks using both Fortran and C:

`-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi`

Base Other Flags

C benchmarks:

`-Mipa=jobs:4`

C++ benchmarks:

`-Mipa=jobs:4`

Fortran benchmarks:

`-Mipa=jobs:4`

Benchmarks using both Fortran and C:

`-Mipa=jobs:4`

Peak Compiler Invocation

C benchmarks:

`pgcc`

C++ benchmarks (except as noted below):

`pathCC`

`444.namd: pgcpp`

Fortran benchmarks (except as noted below):

`pathf95`

`410.bwaves: pgf95`

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.5

ProLiant DL365 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.3

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Compiler Invocation (Continued)

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: pathcc pathf95

481.wrf: pathcc pathf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64

416.gamess: -DSPEC_CPU_LP64

433.milc: -DSPEC_CPU_LP64

434.zeusmp: -DSPEC_CPU_LP64

435.gromacs: -DSPEC_CPU_LP64

436.cactusADM: -DSPEC_CPU_LP64 -Mnomain

437.leslie3d: -DSPEC_CPU_LP64

444.namd: -DSPEC_CPU_LP64

453.povray: -DSPEC_CPU_LP64

454.calculix: -DSPEC_CPU_LP64 -Mnomain

459.GemsFDTD: -DSPEC_CPU_LP64

465.tonto: -DSPEC_CPU_LP64

470.lbm: -DSPEC_CPU_LP64

481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX -fno-second-underscore

482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: basepeak = yes

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)

-Mipa=fast(pass 2) -Mipa=inline(pass 2)

-Mvect=cachesize:6291456 -fastsse -Mfprelaxed -Msmartalloc

-tp barcelona-64 -Bstatic_pgi

C++ benchmarks:

444.namd: -Mphi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)

-Mipa=inline(pass 2) -Mvect=cachesize:6291456 -fastsse

-Munroll=n:4 -Munroll=m:8 -Msmartalloc=huge -Mnodepchk

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.5

ProLiant DL365 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.3

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

444.namd (continued):

-Mfprelaxed --zc_eh -tp barcelona-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
-fno-exceptions -m32

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -L/usr/lib -lhugetlbfs(pass 2) -O3
-INLINE:aggressive=on -OPT:IEEE_arith=3
-OPT:IEEE_NaN_Inf=off -OPT:fold_unsigned_relops=on
-OPT:malloc_alg=1 -CG:load_exe=0 -fno-exceptions -m32

453.povray: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on

Fortran benchmarks:

410.bwaves: basepeak = yes

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
-fb_opt fbdata(pass 2)
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT(pass 2)
-L/usr/lib64 -lhugetlbfs(pass 2) -O2 -OPT:Ofast -OPT:ro=3
-OPT:unroll_size=256

434.zeusmp: -Mvect=cachesize:6291456 -fastsse -Mfprelaxed
-Mprefetch=distance:8 -Mprefetch=t0 -Msmartalloc=huge
-Msmartalloc=hugebss -Mipa=fast -Mipa=inline
-tp barcelona-64 -Bstatic_pgi

437.leslie3d: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Mvect=fuse
-Msmartalloc=huge -Mprefetch=distance:8 -Mprefetch=t0
-Mfprelaxed -tp barcelona-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
-LNO:prefetch_ahead=1 -CG:load_exe=0 -CG:prefer_lru_reg=off
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
-LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525
-OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lhugetlbfs

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp2006 = 21.5

ProLiant DL365 G5
(2.7 GHz AMD Opteron 2384)

SPECfp_base2006 = 19.3

CPU2006 license: 3

Test date: Dec-2008

Test sponsor: Hewlett-Packard Company

Hardware Availability: Nov-2008

Tested by: Hewlett-Packard Company

Software Availability: Jun-2008

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -OPT:malloc_alg=1
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lugetlbfs

436.cactusADM: basepeak = yes

454.calculix: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2)
-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge
-Mprefetch=t0 -Mpre -Mfprelaxed -tp barcelona-64
-Bstatic_pgi

481.wrf: -march=barcelona -Ofast -LNO:blocking=off
-LNO:prefetch_ahead=10 -LANG:copyinout=off
-IPA:callee_limit=5000 -GRA:prioritize_by_density=on
-OPT:malloc_alg=1 -m3dnow
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf_x86_64.xBDT
-L/usr/lib64 -lugetlbfs

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks (except as noted below):

-Mipa=jobs:4(pass 2)

416.gamess: No flags used

459.GemsFDTD: No flags used

465.tonto: No flags used

Benchmarks using both Fortran and C (except as noted below):

-Mipa=jobs:4(pass 2)

435.gromacs: No flags used

481.wrf: No flags used

The flags files that were used to format this result can be browsed at

http://www.spec.org/cpu2006/flags/pgi72_linux_flags.html

http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.html

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant DL365 G5
(2.7 GHz AMD Opteron 2384)

SPECfp2006 = 21.5

SPECfp_base2006 = 19.3

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: Dec-2008

Hardware Availability: Nov-2008

Software Availability: Jun-2008

You can also download the XML flags sources by saving the following links:

- http://www.spec.org/cpu2006/flags/pgi72_linux_flags.xml
- http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.xml
- <http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Tue Jul 22 22:37:49 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 4 February 2009.