



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

### SPECint®\_rate2006 = 150

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

### SPECint\_rate\_base2006 = 127

CPU2006 license: 3


Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

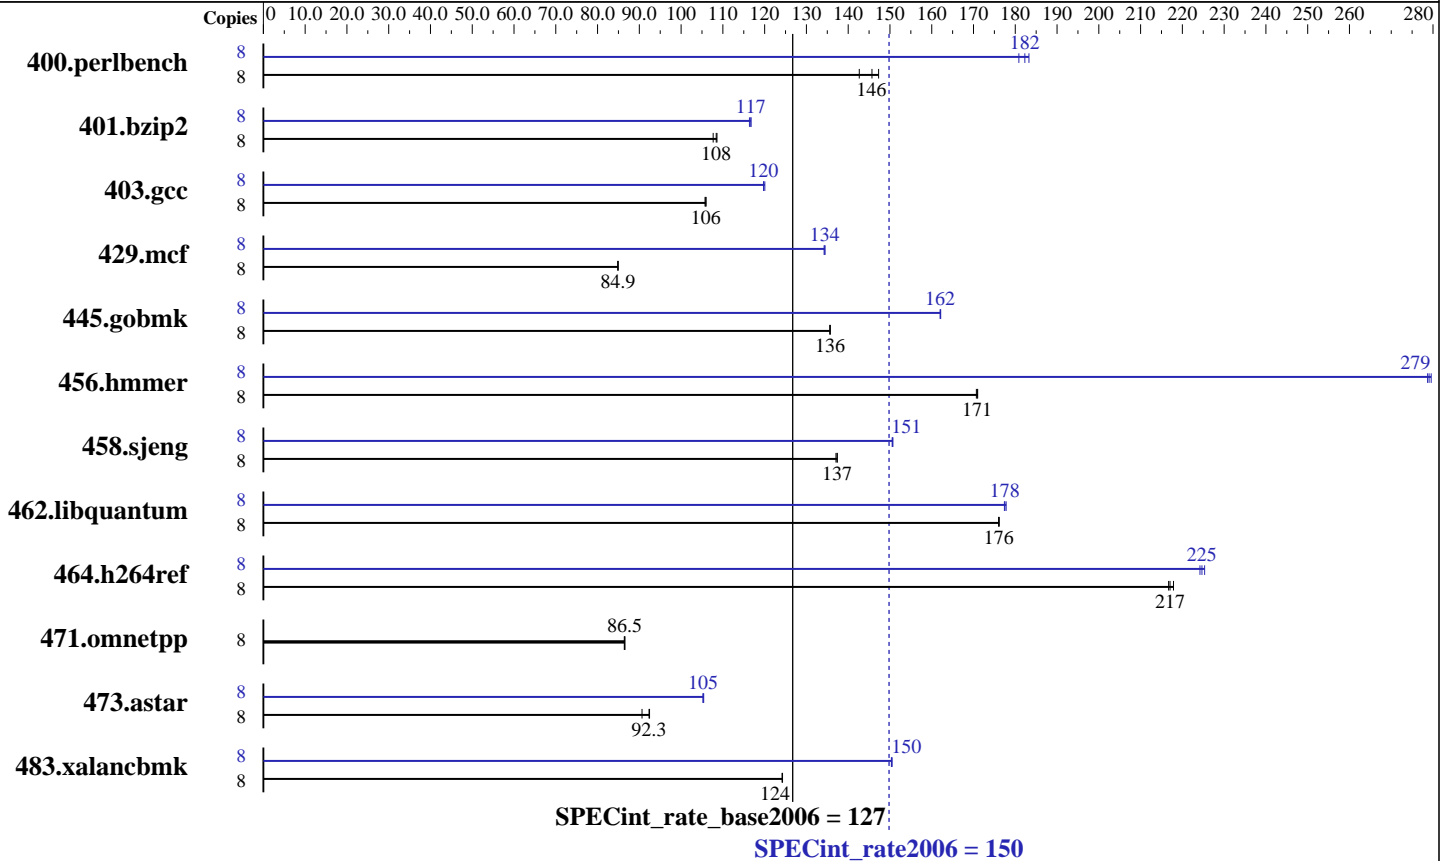

### Hardware

CPU Name: AMD Opteron 8393 SE  
 CPU Characteristics:  
 CPU MHz: 3100  
 FPU: Integrated  
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip  
 CPU(s) orderable: 2,4 chips  
 Primary Cache: 64 KB I + 64 KB D on chip per core  
 Secondary Cache: 512 KB I+D on chip per core  
 L3 Cache: 6 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 32 GB (8x4 GB, PC2-6400P CL5)  
 Disk Subsystem: 1x72 GB 15 K SAS  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Advanced Platform, Kernel 2.6.18-128.el5  
 Compiler: PGI Server Complete Version 8.0 PathScale Compiler Suite Version 3.2  
 Auto Parallel: No  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32/64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: binutils 2.18  
 32-bit and 64-bit libhugetlbfs libraries  
 SmartHeap 8.1 32-bit Library for Linux



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Hewlett-Packard Company

SPECint\_rate2006 = 150

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

SPECint\_rate\_base2006 = 127

CPU2006 license: 3

Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	548	143	531	147	<b>536</b>	<b>146</b>	8	432	181	426	183	<b>429</b>	<b>182</b>
401.bzip2	8	717	108	711	109	<b>712</b>	<b>108</b>	8	661	117	<b>661</b>	<b>117</b>	663	116
403.gcc	8	<b>608</b>	<b>106</b>	609	106	608	106	8	536	120	538	120	<b>538</b>	<b>120</b>
429.mcf	8	860	84.8	859	84.9	<b>859</b>	<b>84.9</b>	8	543	134	<b>543</b>	<b>134</b>	544	134
445.gobmk	8	<b>619</b>	<b>136</b>	619	136	618	136	8	518	162	518	162	<b>518</b>	<b>162</b>
456.hammer	8	436	171	437	171	<b>437</b>	<b>171</b>	8	<b>267</b>	<b>279</b>	267	280	268	279
458.sjeng	8	<b>705</b>	<b>137</b>	705	137	706	137	8	642	151	643	151	<b>643</b>	<b>151</b>
462.libquantum	8	941	176	942	176	<b>942</b>	<b>176</b>	8	934	177	<b>934</b>	<b>178</b>	932	178
464.h264ref	8	813	218	<b>816</b>	<b>217</b>	817	217	8	<b>788</b>	<b>225</b>	790	224	786	225
471.omnetpp	8	<b>578</b>	<b>86.5</b>	579	86.4	578	86.5	8	<b>578</b>	<b>86.5</b>	579	86.4	578	86.5
473.astar	8	608	92.4	<b>608</b>	<b>92.3</b>	620	90.6	8	533	105	534	105	<b>533</b>	<b>105</b>
483.xalancbmk	8	<b>444</b>	<b>124</b>	444	124	444	124	8	367	151	367	150	<b>367</b>	<b>150</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

Environment stack size set to 'unlimited'  
Max locked memory set to 2097152  
The libhugetlbfs libraries were installed using the installation rpms that came with the distribution.  
PGI\_HUGE\_PAGES set to 896.  
Total number of huge pages available is 7168.

## Platform Notes

BIOS configuration:  
Power Regulator set to Static High Performance Mode

## General Notes

Environment variables set by runspec before the start of the run:  
HUGETLB\_MORECORE = "yes"



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 150**

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

**SPECint\_rate\_base2006 = 127**

**CPU2006 license:** 3

**Test date:** Apr-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2009

## Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

## Base Portability Flags

```

400.perlbench: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX_X64
401.bzip2: -DSPEC_CPU_LP64
403.gcc: -DSPEC_CPU_LP64
429.mcf: -DSPEC_CPU_LP64
445.gobmk: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
464.h264ref: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

```

## Base Optimization Flags

C benchmarks:

```

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
-Mipa=fast -Mipa=inline -tp barcelona-64 -Bstatic_pgi

```

C++ benchmarks:

```

-Mvect=cachesize:6291456 -fastsse -Msmartalloc=huge -Mfprelaxed
--zc_eh -Mipa=fast -Mipa=inline:6 -tp barcelona-32 -Bstatic_pgi

```

## Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

## Peak Compiler Invocation

C benchmarks (except as noted below):

pathcc

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 150**

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

**SPECint\_rate\_base2006 = 127**

**CPU2006 license:** 3

**Test date:** Apr-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2009

## Peak Compiler Invocation (Continued)

456.hmmcr: pgcc

462.libquantum: pgcc

C++ benchmarks (except as noted below):

pgcpp

483.xalancbmk: pathCC

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
401.bzip2: -DSPEC\_CPU\_LP64  
445.gobmk: -DSPEC\_CPU\_LP64  
456.hmmcr: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
464.h264ref: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -Ofast -IPA:plimit=20000  
-IPA:field\_reorder=on -LNO:opt=0 -WOPT:if\_conv=0  
-CG:local\_sched\_alg=1

401.bzip2: -march=barcelona -O3 -OPT:alias=disjoint -OPT:Ofast  
-OPT:goto=off -INLINE:aggressive=on -CG:local\_sched\_alg=1  
-m3dnow  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT  
-L/usr/lib64 -lhugetlbfs

403.gcc: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2) -Ofast -OPT:malloc\_alg=1  
-LNO:trip\_count=256 -LNO:prefetch\_ahead=10  
-CG:prefer\_lru\_reg=off -m32

429.mcf: -march=barcelona -O3 -ipa -INLINE:aggressive=on  
-CG:gcm=off -GRA:prioritize\_by\_density=on -m32  
-L/usr/lib -lhugetlbfs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint\_rate2006 = 150

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

SPECint\_rate\_base2006 = 127

CPU2006 license: 3

Test date: Apr-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Apr-2009

Tested by: Hewlett-Packard Company

Software Availability: Mar-2009

## Peak Optimization Flags (Continued)

445.gobmk: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -OPT:alias=restrict  
-LNO:prefetch=1 -LNO:ignore\_feedback=off -CG:p2align=on

456.hmmcr: -Mvect=cachesize:6291456 -fastsse -Mvect=partial  
-Munroll=n:8 -Msmartalloc=huge -Msafeptr -Mprefetch=t0  
-Mfprelaxed -Mipa=const -Mipa=ptr -Mipa=arg -Mipa=inline  
-tp barcelona-64 -Bstatic\_pgi

458.sjeng: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -ipa  
-LNO:ignore\_feedback=off -LNO:full\_unroll=10 -LNO:fusion=0  
-LNO:fission=2 -IPA:pu\_reorder=2 -CG:ptr\_load\_use=0  
-OPT:unroll\_times\_max=8 -INLINE:aggressive=on

462.libquantum: -Mvect=cachesize:6291456 -fastsse -Munroll=m:8  
-Msmartalloc=huge -Mprefetch=distance:4 -Mfprelaxed  
-Mipa=fast -Mipa=inline -Mipa=noarg -tp barcelona-64  
-Bstatic\_pgi

464.h264ref: -march=barcelona -fb\_create fbdata(pass 1)  
-fb\_opt fbdata(pass 2)  
-Wl,-T/usr/share/libhugetlbfs/ldscripts/elf\_x86\_64.xBDT(pass 2)  
-L/usr/lib64 -lhugetlbfs(pass 2) -O3 -IPA:plimit=20000  
-OPT:alias=disjoint -LNO:prefetch=0 -CG:ptr\_load\_use=0  
-CG:push\_pop\_int\_saved\_regs=off -CG:prefer\_lru\_reg=off

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -Mphi(pass 1) -Mphi(pass 2) -Mipa=fast(pass 2)  
-Mipa=inline:6(pass 2) -Mvect=cachesize:6291456 -fastsse  
-O4 -Msmartalloc=huge -Msafeptr=global -Mfprelaxed  
--zc\_eh -tp barcelona-32 -Bstatic\_pgi

483.xalancbmk: -march=barcelona -Ofast -INLINE:aggressive=on -m32  
-L/cpu2006/SmartHeap\_8.1/lib -lsmartheap

## Peak Other Flags

C benchmarks:

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Hewlett-Packard Company**

**SPECint\_rate2006 = 150**

ProLiant DL585 G5  
(3.1 GHz AMD Opteron 8393 SE)

**SPECint\_rate\_base2006 = 127**

**CPU2006 license:** 3

**Test date:** Apr-2009

**Test sponsor:** Hewlett-Packard Company

**Hardware Availability:** Apr-2009

**Tested by:** Hewlett-Packard Company

**Software Availability:** Mar-2009

## Peak Other Flags (Continued)

456.hmmmer: -Mipa=jobs:4

462.libquantum: -Mipa=jobs:4

C++ benchmarks (except as noted below):  
-Mipa=jobs:4(pass 2)

483.xalancbmk: No flags used

The flags files that were used to format this result can be browsed at

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.00.html](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.html)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.00.html](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.00.html)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.html>

You can also download the XML flags sources by saving the following links:

[http://www.spec.org/cpu2006/flags/pgi80\\_linux\\_flags.20090710.00.xml](http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.00.xml)

[http://www.spec.org/cpu2006/flags/CPU2006\\_flags.20090710.00.xml](http://www.spec.org/cpu2006/flags/CPU2006_flags.20090710.00.xml)

<http://www.spec.org/cpu2006/flags/amd-platform-amd909gh.20090710.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 01:53:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 28 April 2009.