



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherboard X7DVL-I

SPECint®_rate2006 = 115

SPECint_rate_base2006 = 106

CPU2006 license: 001176


Test sponsor: Supermicro

Tested by: Supermicro

Test date: Apr-2009

Hardware Availability: Nov-2007

Software Availability: Nov-2008

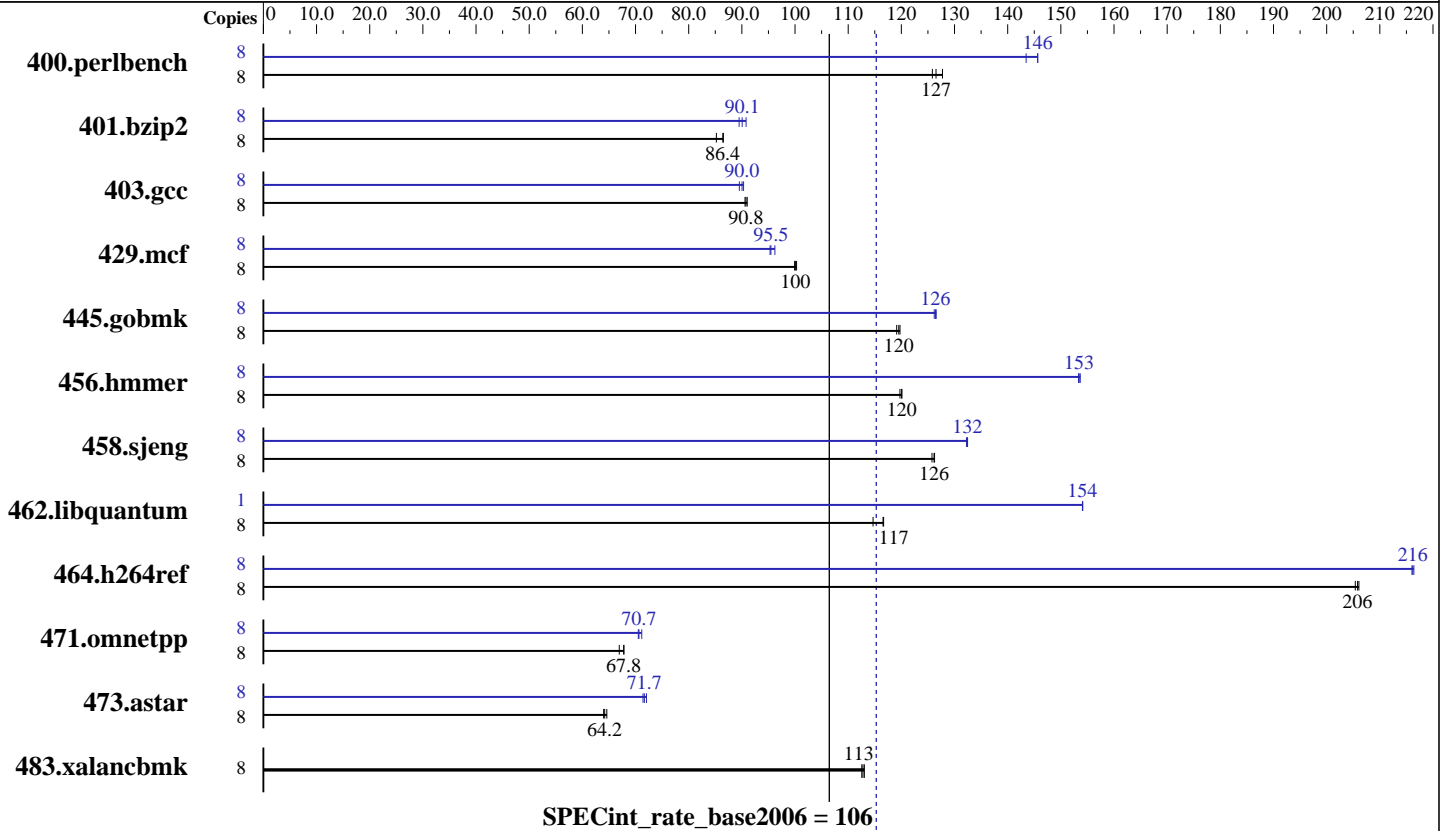

Hardware

CPU Name: Intel Xeon E5410
 CPU Characteristics: Quad Core, 2.33 GHz, 1333 MHz System Bus
 CPU MHz: 2333
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 12 MB I+D on chip per chip, 6 MB shared / 2 cores
 L3 Cache: None
 Other Cache: None
 Memory: 12 GB (6 x 2 GB DDR2-667 FBD, CL5)
 Disk Subsystem: 1 x 750 GB SATA II, 7200 RPM
 Other Hardware: None

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.37_f594963d-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20080930 Package ID: l_cproc_p_11.0.066
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro Motherboard X7DVL-I

SPECint_rate2006 = 115

SPECint_rate_base2006 = 106

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2009
Hardware Availability: Nov-2007
Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	612	128	618	127	621	126	8	545	143	537	146	537	146
401.bzip2	8	906	85.2	893	86.4	892	86.5	8	863	89.5	857	90.1	850	90.8
403.gcc	8	709	90.8	708	91.0	711	90.6	8	715	90.0	713	90.3	719	89.5
429.mcf	8	730	99.9	727	100	729	100	8	758	96.2	764	95.5	766	95.3
445.gobmk	8	702	120	704	119	701	120	8	663	127	664	126	665	126
456.hammer	8	623	120	622	120	622	120	8	487	153	486	153	486	154
458.sjeng	8	767	126	767	126	770	126	8	731	132	731	132	732	132
462.libquantum	8	1445	115	1422	117	1421	117	1	135	154	134	154	134	154
464.h264ref	8	862	205	859	206	860	206	8	819	216	818	216	819	216
471.omnetpp	8	747	66.9	737	67.8	738	67.8	8	703	71.2	708	70.7	709	70.5
473.astar	8	877	64.0	869	64.6	875	64.2	8	784	71.7	786	71.4	779	72.1
483.xalancbmk	8	490	113	489	113	488	113	8	490	113	489	113	488	113

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 462.libquantum peak

Operating System Notes

'ulimit -S unlimited' was used to set the stacksize to unlimited prior to run

General Notes

OMP_NUM_THREADS set to number of processors
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M
Tested system is built in open environment,
to ensure system stability, a 500W (minimum) ATX power supply
[8-pin (+12V) and 24-pin are required]
Product description can be obtained at
<http://www.supermicro.com/products/motherboard/Xeon1333/5000V/X7DVL-i.cfm>

Base Compiler Invocation

C benchmarks:
icc

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
Motherboard X7DVL-I

SPECint_rate2006 = 115

SPECint_rate_base2006 = 106

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2009
Hardware Availability: Nov-2007
Software Availability: Nov-2008

Base Compiler Invocation (Continued)

C++ benchmarks:
icpc

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:
-xSSE4.1 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:
403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):
icc

401.bzip2: /opt/intel/Compiler/11.0/066/bin/intel64/icc
456.hmmer: /opt/intel/Compiler/11.0/066/bin/intel64/icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
Motherboard X7DVL-I

SPECint_rate2006 = 115

SPECint_rate_base2006 = 106

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2009
Hardware Availability: Nov-2007
Software Availability: Nov-2008

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch
401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias
403.gcc: -xSSE4.1 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3
429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -opt-prefetch
445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -O2 -ipo
-no-prec-div -ansi-alias
456.hmmer: -xSSE4.1 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias
458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll4
462.libquantum: -xSSE4.1 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch
464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap
473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSE4.1 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmarheap

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Supermicro
Motherboard X7DVL-I

SPECint_rate2006 = 115
SPECint_rate_base2006 = 106

CPU2006 license: 001176
Test sponsor: Supermicro
Tested by: Supermicro

Test date: Apr-2009
Hardware Availability: Nov-2007
Software Availability: Nov-2008

Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.00.html>
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-Linux64-Platform.20090710.00.xml>
<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.01.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:38:01 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 3 June 2009.