



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7450)

SPECint®_rate2006 = 194

SPECint_rate_base2006 = 182

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

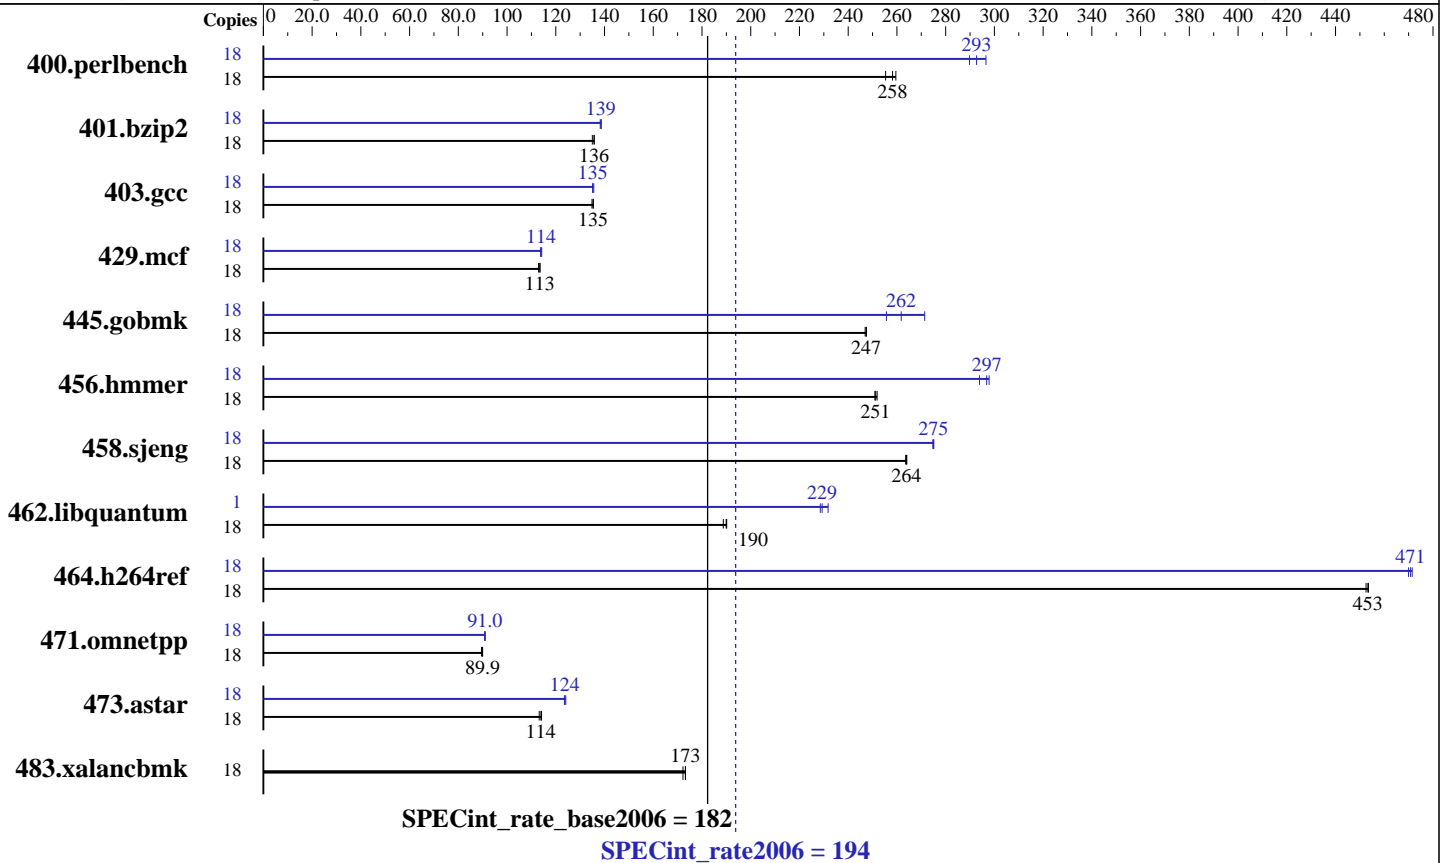

Hardware

CPU Name: Intel Xeon E7450
 CPU Characteristics: 1066 MHz system bus
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 18 cores, 3 chips, 6 cores/chip
 CPU(s) orderable: 1,2,3,4 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 9 MB I+D on chip per chip, 3 MB shared / 2 cores
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 64 GB (16x4 GB PC2-5300F, 2 rank, CL5-5-5, ECC)
 Disk Subsystem: 1x146.5 GB SAS, 10000 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: Intel C++ Compiler 11.0 for Linux Build 20081105 Package ID: l_cproc_p_11.0.074
 Auto Parallel: Yes
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: MicroQuill SmartHeap Library 8.1 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7450)

SPECint_rate2006 = 194

SPECint_rate_base2006 = 182

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	18	681	258	689	255	678	260	18	607	290	593	297	601	293
401.bzip2	18	1287	135	1280	136	1279	136	18	1253	139	1254	139	1257	138
403.gcc	18	1074	135	1070	135	1071	135	18	1073	135	1072	135	1069	136
429.mcf	18	1454	113	1447	113	1446	114	18	1443	114	1437	114	1440	114
445.gobmk	18	763	247	763	247	765	247	18	696	271	721	262	738	256
456.hammer	18	669	251	668	251	667	252	18	571	294	564	298	566	297
458.sjeng	18	825	264	826	264	825	264	18	793	275	792	275	792	275
462.libquantum	18	1976	189	1964	190	1961	190	1	90.7	229	90.4	229	89.4	232
464.h264ref	18	880	453	879	453	878	454	18	846	471	845	471	848	470
471.omnetpp	18	1257	89.5	1251	89.9	1250	90.0	18	1239	90.8	1236	91.0	1237	91.0
473.astar	18	1116	113	1109	114	1107	114	18	1023	124	1021	124	1018	124
483.xalancbmk	18	721	172	717	173	717	173	18	721	172	717	173	717	173

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
taskset was used to bind processes to cores except
for 462.libquantum peak

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run
OMP_NUM_THREADS set to number of cores
KMP_AFFINITY set to "physical,0"
KMP_STACKSIZE set to 64M

Platform Notes

Bios settings:
Hardware Prefetcher: Disabled
Adjacent Cache Line Prefetch: Disabled
FSB High Bandwidth Optimization: Disabled

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7450)

SPECint_rate2006 = 194

SPECint_rate_base2006 = 182

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSSE3 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/opt/SmartHeap_8.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

456.hmmer: /opt/intel/Compiler/11.0/074/bin/intel64/icc
-L/opt/intel/Compiler/11.0/074/ipp/em64t/lib
-I/opt/intel/Compiler/11.0/074/ipp/em64t/include

C++ benchmarks:

icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

SPECint_rate2006 = 194

Express5800/B140a-T
(Intel Xeon E7450)

SPECint_rate_base2006 = 182

CPU2006 license: 9006

Test date: Apr-2009

Test sponsor: NEC Corporation

Hardware Availability: Feb-2009

Tested by: NEC Corporation

Software Availability: Nov-2008

Peak Portability Flags (Continued)

462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -ansi-alias -opt-prefetch

401.bzip2: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch -ansi-alias

403.gcc: -xSSSE3 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3

429.mcf: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -opt-prefetch

445.gobmk: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -O2 -ipo
-no-prec-div -ansi-alias

456.hmmcr: -xSSSE3 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias

458.sjeng: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll4

462.libquantum: -xSSSE3 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -parallel -par-runtime-control
-opt-prefetch

464.h264ref: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -static -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=block
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

473.astar: -prof-gen(pass 1) -prof-use(pass 2) -xSSSE3 -ipo -O3
-no-prec-div -ansi-alias -opt-ra-region-strategy=routine
-Wl,-z,muldefs -L/opt/SmartHeap_8.1/lib -lsmartheap

483.xalancbmk: basepeak = yes



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

NEC Corporation

Express5800/B140a-T
(Intel Xeon E7450)

SPECint_rate2006 = 194

SPECint_rate_base2006 = 182

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Apr-2009

Hardware Availability: Feb-2009

Software Availability: Nov-2008

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.html>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revE.xml>

<http://www.spec.org/cpu2006/flags/NEC-Intel-Linux-Settings-flags-revB.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Tue Jul 22 23:40:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 12 May 2009.