



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint®_rate2006 = 127

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECint_rate_base2006 = 117

CPU2006 license: 3


Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

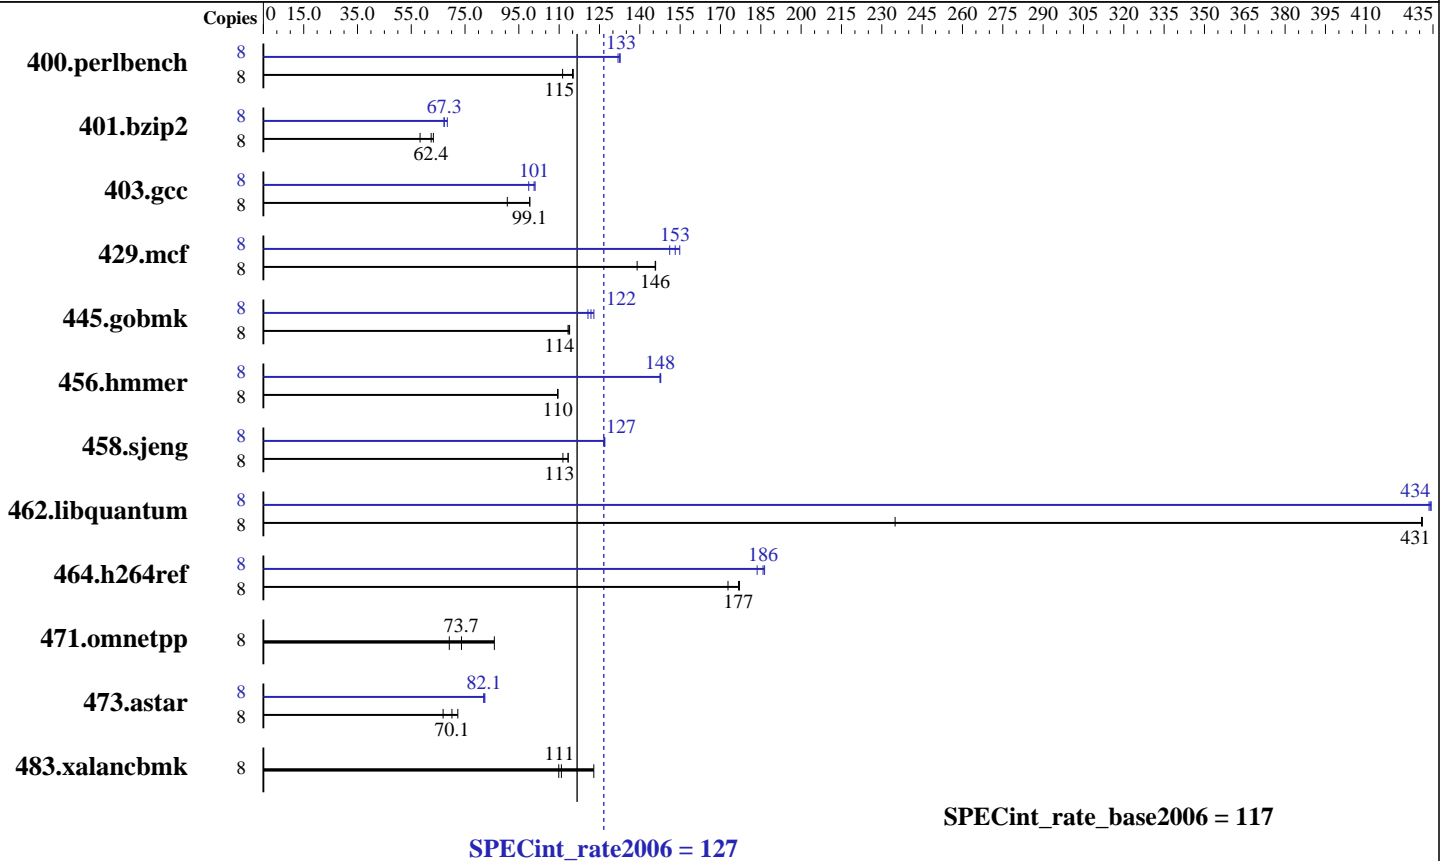

Hardware

CPU Name: Intel Xeon E5504
 CPU Characteristics:
 CPU MHz: 2000
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6x4 GB PC3-10600R CL9)
 Disk Subsystem: 2x146 GB 10 K SAS
 Other Hardware: None

Software

Operating System: Red Hat Enterprise Linux Server release 5.3
 Kernel 2.6.18-128.el5
 Compiler: Intel C++ Compiler 11.0 for Linux
 Build 20090131 Package ID: l_cproc_p_11.0.080
 Auto Parallel: No
 File System: ext3
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECint_rate2006 = 127

SPECint_rate_base2006 = 117

CPU2006 license: 3

Test sponsor: Hewlett-Packard Company

Tested by: Hewlett-Packard Company

Test date: May-2009

Hardware Availability: Mar-2009

Software Availability: Feb-2009

Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	702	111	680	115	678	115	8	593	132	589	133	590	133
401.bzip2	8	1325	58.3	1221	63.2	1237	62.4	8	1148	67.3	1128	68.4	1149	67.2
403.gcc	8	710	90.7	650	99.1	650	99.1	8	653	98.7	637	101	640	101
429.mcf	8	525	139	501	146	500	146	8	483	151	471	155	476	153
445.gobmk	8	737	114	738	114	741	113	8	683	123	689	122	695	121
456.hammer	8	681	110	682	109	682	110	8	506	148	505	148	506	148
458.sjeng	8	869	111	854	113	854	113	8	763	127	764	127	762	127
462.libquantum	8	705	235	385	431	385	431	8	382	434	382	434	382	434
464.h264ref	8	1002	177	1000	177	1025	173	8	950	186	953	186	964	184
471.omnetpp	8	723	69.1	582	85.9	679	73.7	8	723	69.1	582	85.9	679	73.7
473.astar	8	840	66.8	777	72.3	801	70.1	8	685	81.9	684	82.1	682	82.4
483.xalancbmk	8	502	110	449	123	498	111	8	502	110	449	123	498	111

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS configuration:
HP Power Profile set to Maximum Performance
HP Power Regulator set to HP Static High Performance Mode
Thermal Configuration set to Increased Cooling

Base Compiler Invocation

C benchmarks:
icc

C++ benchmarks:
icpc



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 127

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECint_rate_base2006 = 117

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalancbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/spec/cpu2006.1.1/lib -lsmartheap

Base Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

Peak Compiler Invocation

C benchmarks (except as noted below):

icc

401.bzip2: /opt/intel/Compiler/11.0/080/bin/intel64/icc

456.hmmer: /opt/intel/Compiler/11.0/080/bin/intel64/icc

458.sjeng: /opt/intel/Compiler/11.0/080/bin/intel64/icc

C++ benchmarks (except as noted below):

icpc

473.astar: /opt/intel/Compiler/11.0/080/bin/intel64/icpc

Peak Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
401.bzip2: -DSPEC_CPU_LP64
456.hmmer: -DSPEC_CPU_LP64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 127

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECint_rate_base2006 = 117

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Peak Portability Flags (Continued)

458.sjeng: -DSPEC_CPU_LP64
462.libquantum: -DSPEC_CPU_LINUX
473.astar: -DSPEC_CPU_LP64
483.xalancbmk: -DSPEC_CPU_LINUX

Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias -opt-prefetch
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc
-opt-malloc-options=3
429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static
-opt-malloc-options=3 -opt-prefetch
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: basepeak = yes
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
-Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECint_rate2006 = 127

ProLiant BL460c G6
(2.00 GHz, Intel Xeon E5504)

SPECint_rate_base2006 = 117

CPU2006 license: 3

Test date: May-2009

Test sponsor: Hewlett-Packard Company

Hardware Availability: Mar-2009

Tested by: Hewlett-Packard Company

Software Availability: Feb-2009

Peak Optimization Flags (Continued)

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=_alloca

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090710.html>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.10.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/HP-Intel-Linux-Settings-flags.20090710.xml>

<http://www.spec.org/cpu2006/flags/Intel-ic11.0-int-linux64-revA.20090710.10.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 00:16:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 26 May 2009.