



SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5440

SPECint_rate2006 = 360

SPECint_rate_base2006 = 338

CPU2006 license: 6


Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

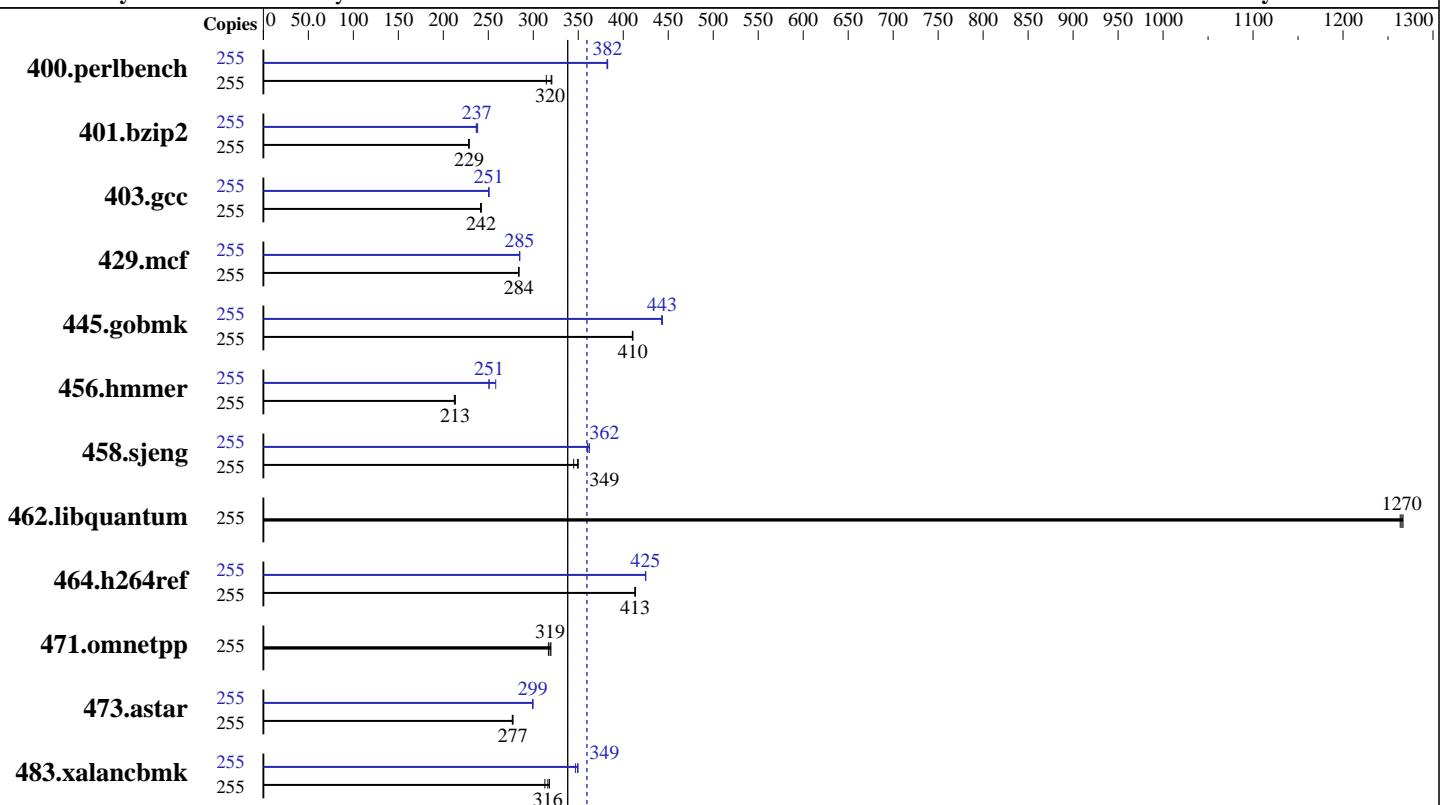

SPECint_rate_base2006 = 338

SPECint_rate2006 = 360

Hardware

CPU Name:	UltraSPARC T2 Plus
CPU Characteristics:	
CPU MHz:	1596
FPU:	Integrated
CPU(s) enabled:	32 cores, 4 chips, 8 cores/chip, 8 threads/core
CPU(s) orderable:	1 to 4 chips
Primary Cache:	16 KB I + 8 KB D on chip per core
Secondary Cache:	4 MB I+D on chip per chip
L3 Cache:	None
Other Cache:	None
Memory:	256 GB (64 x 4 GB)
Disk Subsystem:	536 GB (zfs 8 x 3-way mirrors) on 24x 73GB 15000RPM FC-AL disks in 2x SE3510 enclosures
Other Hardware:	None

Software

Operating System:	Solaris 10 5/09
Compiler:	Sun Studio 12 Update 1 and gccfss V4.2.1 (see additional detail below)
Auto Parallel:	No
File System:	zfs
System State:	Default
Base Pointers:	32-bit
Peak Pointers:	32-bit
Other Software:	None



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5440

SPECint_rate2006 = 360

SPECint_rate_base2006 = 338

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	255	7771	321	7789	320	7922	314	255	6524	382	6514	382	6510	383
401.bzip2	255	10759	229	10766	229	10790	228	255	10402	237	10332	238	10369	237
403.gcc	255	8476	242	8478	242	8504	241	255	8190	251	8186	251	8199	250
429.mcf	255	8193	284	8198	284	8184	284	255	8161	285	8168	285	8165	285
445.gobmk	255	6517	410	6514	411	6523	410	255	6032	443	6034	443	6042	443
456.hmmer	255	11162	213	11210	212	11158	213	255	9212	258	9489	251	9482	251
458.sjeng	255	8834	349	8817	350	8946	345	255	8519	362	8564	360	8519	362
462.libquantum	255	4182	1260	4175	1270	4171	1270	255	4182	1260	4175	1270	4171	1270
464.h264ref	255	13671	413	13646	414	13651	413	255	13284	425	13277	425	13289	425
471.omnetpp	255	5031	317	4987	320	5001	319	255	5031	317	4987	320	5001	319
473.astar	255	6470	277	6458	277	6456	277	255	5981	299	5978	299	5977	299
483.xalancbmk	255	5535	318	5623	313	5564	316	255	5073	347	5039	349	5031	350

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Compiler Invocation Notes

Sun Studio 12 Update 1 pre-release build 41.1 was used.

Peak also uses "GCC for SPARC Systems 4.2.1", which combines gcc with the Sun Code Generator for SPARC systems. It is invoked as "gcc", and accepts source code compatible with GCC 4.2.

For more information, including support, see
<http://cooltools.sunsource.net/gcc/>

Submit Notes

A processor set was created using
`psrset -c 1-255`

and the runspec process was placed into the set using
`psrset -e 1`

The config file option 'submit' was used to select specific processors within the set, along with the pbind command.

Operating System Notes

`ulimit -s 131072` was used to allow the stack to grow up to 131072 KB (aka 128 MB). Note that saying "131072" is preferable to "unlimited", because there is a tradeoff between space for the stack vs. space for the heap.

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5440

SPECint_rate2006 = 360

SPECint_rate_base2006 = 338

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

Operating System Notes (Continued)

/etc/system parameters

autoup=600

Causes pages older than the listed number of seconds to
be written by fsflush.

tune_t_fsflushr=10

Controls how many seconds elapse between runs of the
page flush daemon, fsflush.

tsb_rss_factor=128

Suggests that the size of the TSB (Translation Storage Buffer)
may be increased if it is more than 25% (128/512) full. Doing so
may reduce TSB traps, at the cost of additional kernel memory.

zfs:zfs_arc_max = 0x100000000

Limits the consumption of memory by the zfs file system

The "webconsole" service was turned off using
svcadm disable webconsole

The system had 137 GB of swap space.

Platform Notes

This result was measured on a Sun SPARC Enterprise T5440.
The Sun SPARC Enterprise T5440 and the Fujitsu SPARC
Enterprise T5440 are electrically equivalent.

Base Compiler Invocation

C benchmarks:

cc

C++ benchmarks:

CC

Base Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

403.gcc: -DSPEC_CPU_SOLARIS

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5440

SPECint_rate2006 = 360

SPECint_rate_base2006 = 338

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

Base Optimization Flags

C benchmarks:

```
-g -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto -xalias_level=std  
-M /usr/lib/ld/map.bssalign
```

C++ benchmarks:

```
-g0 -library=stlport4 -fast -xipo=2 -xpagesize=4M -xprefetch=no%auto  
-xdepend -xalias_level=compatible -M /usr/lib/ld/map.bssalign
```

Base Other Flags

C benchmarks:

```
-xjobs=32 -V -#
```

C++ benchmarks:

```
-xjobs=32 -verbose=diags,version
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
cc
```

403.gcc: gcc

456.hmmr: gcc

C++ benchmarks:

```
CC
```

Peak Portability Flags

400.perlbench: -DSPEC_CPU_SOLARIS_SPARC

462.libquantum: -DSPEC_CPU_SOLARIS

483.xalancbmk: -DSPEC_CPU_SOLARIS

Peak Optimization Flags

C benchmarks:

```
400.perlbench: -g -xprofile=collect:./feedback(pass 1)  
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M  
-xprefetch=no%auto -M /usr/lib/ld/map.bssalign  
-xalias_level=std -xipo=2 -Xc -xrestrict -lfast
```

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5440

SPECint_rate2006 = 360

SPECint_rate_base2006 = 338

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

Peak Optimization Flags (Continued)

401.bzip2: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-M /usr/lib/ld/map.bssalign -xalias_level=strong

403.gcc: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -Wl,-M,/usr/lib/ld/map.bssalign -xiyo=2
-xalias_level=std

429.mcf: -g -fast -xprefetch=no%auto -M /usr/lib/ld/map.bssalign
-xiyo=2 -xrestrict -xalias_level=std -lfast

445.gobmk: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -M /usr/lib/ld/map.bssalign
-xalias_level=std -xrestrict

456.hmmr: -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-Wl,-M,/usr/lib/ld/map.bssalign -xiyo=2 -xalias_level=std

458.sjeng: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -M /usr/lib/ld/map.bssalign -xiyo=2

462.libquantum: basepeak = yes

464.h264ref: -g -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize=4M
-xprefetch=no%auto -M /usr/lib/ld/map.bssalign -xiyo=2
-xalias_level=std

C++ benchmarks:

471.omnetpp: basepeak = yes

473.astar: -g0 -library=stlport4 -xprofile=collect:./feedback(pass 1)
-xprofile=use:./feedback(pass 2) -fast -xpagesize_heap=4M
-xpagesize_stack=64K -xprefetch=no%auto -xdepend
-xalias_level=compatible -M /usr/lib/ld/map.bssalign
-xiyo=2 -xarch=v8plusb -lfast -lbsdmalloc

483.xalancbmk: -g0 -library=stlport4 -fast -xpagesize=4M
-xprefetch=no%auto -xdepend -xalias_level=compatible
-M /usr/lib/ld/map.bssalign -xiyo=2 -lfast



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

Sun SPARC Enterprise T5440

SPECint_rate2006 = 360

SPECint_rate_base2006 = 338

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: May-2009

Hardware Availability: Jul-2009

Software Availability: Jun-2009

Peak Other Flags

C benchmarks (except as noted below):

-xjobs=32 -V -#

403.gcc: -v

456.hammer: -v

C++ benchmarks:

-xjobs=32 -verbose=diags,version

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r3.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Sun-Solaris-Studio12-12u1-and-gccfss4.2.r3.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 03:19:54 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 5 August 2009.