



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp[®]_rate2006 = 247

Sun Blade X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate_base2006 = 224

CPU2006 license: 6


Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Apr-2009

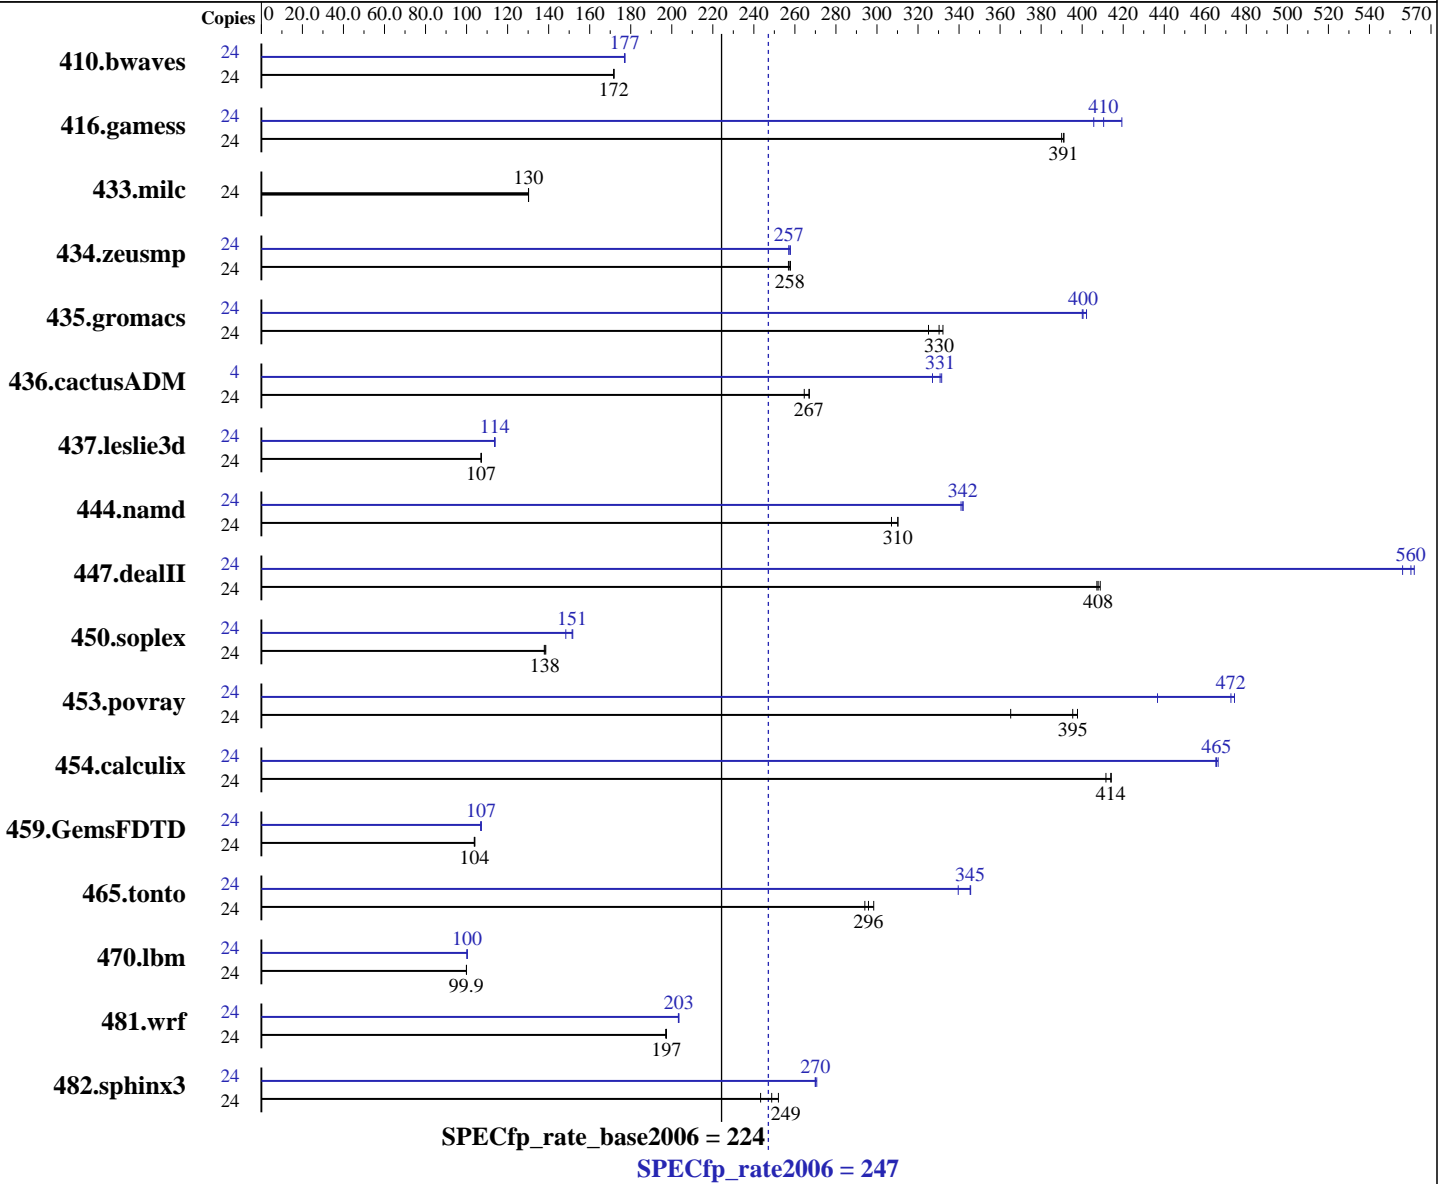

Hardware

CPU Name: AMD Opteron 8435
 CPU Characteristics:
 CPU MHz: 2600
 FPU: Integrated
 CPU(s) enabled: 24 cores, 4 chips, 6 cores/chip
 CPU(s) orderable: 2 or 4 chips
 Primary Cache: 64 KB I + 64 KB D on chip per core
 Secondary Cache: 512 KB I+D on chip per core

Continued on next page

Software

Operating System: SuSE Linux Enterprise Server 10 (x86_64) SP2, Kernel 2.6.16.60-0.21-smp
 Compiler: PGI Server Complete Version 8.0 x86 Open64 4.2.2 Compiler Suite (from AMD)
 Auto Parallel: Yes
 File System: NFSv3
 System State: Run level 3 (Full multiuser with network)
 Base Pointers: 64-bit
 Peak Pointers: 32/64-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 247

Sun Blade X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate_base2006 = 224

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Apr-2009

L3 Cache: 6 MB I+D on chip per chip
Other Cache: None
Memory: 64 GB (16x4GB, DDR2-667, CL5, Reg, Dual Rank)
Disk Subsystem: 48 x 250GB 7200RPM SATA via NFS
Other Hardware: See additional details below

Other Software: binutils 2.18

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	24	1899	172	1899	172	1898	172	24	1843	177	1842	177	1841	177
416.gamess	24	1205	390	1201	391	1202	391	24	1121	419	1158	406	1145	410
433.milc	24	1693	130	1692	130	1692	130	24	1693	130	1692	130	1692	130
434.zeusmp	24	850	257	847	258	848	258	24	847	258	850	257	849	257
435.gromacs	24	527	325	519	330	516	332	24	426	402	428	400	428	400
436.cactusADM	24	1084	265	1075	267	1074	267	4	146	327	144	332	145	331
437.leslie3d	24	2104	107	2105	107	2108	107	24	1986	114	1984	114	1981	114
444.namd	24	621	310	620	310	627	307	24	564	341	563	342	563	342
447.dealII	24	673	408	674	407	672	409	24	494	556	489	562	490	560
450.soplex	24	1452	138	1448	138	1444	139	24	1349	148	1322	151	1319	152
453.povray	24	321	398	323	395	350	365	24	270	472	292	437	269	474
454.calculix	24	478	414	481	412	478	414	24	426	465	425	465	425	466
459.GemsFDTD	24	2454	104	2450	104	2448	104	24	2377	107	2383	107	2376	107
465.tonto	24	803	294	791	298	798	296	24	683	346	684	345	695	340
470.lbm	24	3300	99.9	3299	100	3300	99.9	24	3290	100	3289	100	3287	100
481.wrf	24	1358	197	1358	197	1361	197	24	1318	203	1318	203	1319	203
482.sphinx3	24	1923	243	1856	252	1881	249	24	1728	271	1733	270	1733	270

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
'numactl' was used to bind copies to the cores.
See the configuration file for details.

Operating System Notes

'ulimit -s unlimited' was used to set environment stack size
'ulimit -l 2097152' was used to set environment locked pages in memory limit

Set vm/nr_hugepages=10800 in /etc/sysctl.conf
mount -t hugetlbfs nodev /mnt/hugepages



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 247

Sun Blade X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate_base2006 = 224

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

Platform Notes

Default BIOS settings used except:
DCT Unganged Mode set to "Always" to enable Unganged Mode

General Notes

Environment variables set by runspec before the start of the run:

HUGETLB_LIMIT = "450"

LD_LIBRARY_PATH = "/ctmp0/gnana/pegasus-istanbul-sles10sp2/amd0905is-libs/64:/ctmp0/gnana/pegasus-istanbul-sles10sp2/amd0905is-libs/32"

NCPUS = "6"

PGI_HUGE_PAGES = "450"

The NFS server used was a Sun Fire X4540 containing 48 x 250GB 7200RPM SATA disks. Connections to the clients were via gigabit ethernet.

The x86 Open64 Compiler Suite is only available from (and supported by) AMD at <http://developer.amd.com/cpu/open64>.

Base Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks:

pgcpp

Fortran benchmarks:

pgf95

Benchmarks using both Fortran and C:

pgcc pgf95

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -Mnomain
436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -Mnomain
459.GemsFDTD: -DSPEC_CPU_LP64

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 247

Sun Blade X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate_base2006 = 224

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Apr-2009

Base Portability Flags (Continued)

465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Bstatic_pgi

C++ benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed --zc_eh -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Fortran benchmarks:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mvect=short -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

Benchmarks using both Fortran and C:

-fastsse -Msmartalloc=huge -Mfprelaxed -Mipa=fast -Mipa=inline
-tp shanghai-64 -Mvect=short -Bstatic_pgi

Base Other Flags

C benchmarks:

-Mipa=jobs:4

C++ benchmarks:

-Mipa=jobs:4

Fortran benchmarks:

-Mipa=jobs:4

Benchmarks using both Fortran and C:

-Mipa=jobs:4

Peak Compiler Invocation

C benchmarks:

pgcc

C++ benchmarks (except as noted below):

openCC

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 247

Sun Blade X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate_base2006 = 224

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Apr-2009

Peak Compiler Invocation (Continued)

444.namd: pgcpp

Fortran benchmarks (except as noted below):

openf95

410.bwaves: pgf95

434.zeusmp: pgf95

437.leslie3d: pgf95

Benchmarks using both Fortran and C (except as noted below):

pgcc pgf95

435.gromacs: opencc openf95

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64
 436.cactusADM: -DSPEC_CPU_LP64 -Mnomain
 437.leslie3d: -DSPEC_CPU_LP64
 444.namd: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -Mnomain
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
 482.sphinx3: -DSPEC_CPU_LP64

Peak Optimization Flags

C benchmarks:

433.milc: basepeak = yes

470.lbm: -fastsse -Msmartalloc=huge -Mprefetch=t0 -Mloop32
-Mfprelaxed -Mipa=fast -Mipa=inline -tp shanghai-64
-Bstatic_pgi

482.sphinx3: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mfprelaxed -Msmartalloc -tp shanghai-64 -Bstatic_pgi

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 247

Sun Blade X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate_base2006 = 224

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

C++ benchmarks:

444.namd: -Mpfi(pass 1) -Mpfo(pass 2) -Mipa=fast(pass 2)
 -Mipa=inline(pass 2) -fastsse -Munroll=n:4 -Munroll=m:8
 -Msmartalloc=huge -Mnodepchk -Mfprelaxed --zc_eh
 -tp shanghai-64 -Bstatic_pgi

447.dealII: -march=barcelona -Ofast -static -INLINE:aggressive=on
 -LNO:opt=0 -Wf,-fno-exceptions -m32 -OPT:unroll_times_max=8
 -OPT:unroll_size=256 -OPT:unroll_level=2 -HP:bdt=2m:heap=2m
 -GRA:unspill=on -CG:cmp_peep=on -TENV:frame_pointer=off

450.soplex: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O3 -INLINE:aggressive=on
 -OPT:IEEE_arith=3 -OPT:IEEE_NaN_Inf=off
 -OPT:fold_unsigned_relops=on -OPT:malloc_alg=1
 -CG:load_exe=0 -fno-exceptions -m32 -HP:bdt=2m

453.povray: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -Ofast -INLINE:aggressive=on
 -HP:bdt=2m:heap=2m

Fortran benchmarks:

410.bwaves: -fastsse -Msmartalloc -Mprefetch=nta -Mfprelaxed
 -Mipa=fast -Mipa=inline -tp shanghai-64 -Bstatic_pgi

416.gamess: -march=barcelona -fb_create fbdata(pass 1)
 -fb_opt fbdata(pass 2) -O2 -OPT:Ofast -OPT:ro=3
 -OPT:unroll_size=256 -HP:bdt=2m:heap=2m

434.zeusmp: -fastsse -Mfprelaxed -Mprefetch=distance:8 -Mprefetch=t0
 -Msmartalloc=huge -Msmartalloc=hugebss -Mipa=fast
 -Mipa=inline -tp shanghai-64 -Bstatic_pgi

437.leslie3d: -Mpfi=indirect(pass 1) -Mpfo=indirect(pass 2)
 -Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
 -Mvect=fuse -Msmartalloc=huge -Mprefetch=distance:8
 -Mprefetch=t0 -Mfprelaxed -tp shanghai-64 -Bstatic_pgi

459.GemsFDTD: -march=barcelona -Ofast -LNO:fission=2 -LNO:simd=2
 -LNO:prefetch_ahead=1 -CG:load_exe=0 -HP

465.tonto: -march=barcelona -Ofast -OPT:alias=no_f90_pointer_alias
 -LNO:blocking=off -CG:load_exe=1 -IPA:plimit=525 -HP

Benchmarks using both Fortran and C:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 247

Sun Blade X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate_base2006 = 224

CPU2006 license: 6

Test date: Aug-2009

Test sponsor: Sun Microsystems

Hardware Availability: Jul-2009

Tested by: Sun Microsystems

Software Availability: Apr-2009

Peak Optimization Flags (Continued)

435.gromacs: -march=barcelona -Ofast -OPT:rsqrt=2 -HP:bdt=2m:heap=2m

436.cactusADM: -fastsse -Mconcur -Msmartalloc=huge -Mfprelaxed -Mipa=fast
-Mipa=inline -tp shanghai-64 -Bstatic_pgi

454.calculix: -Mphi=indirect(pass 1) -Mpfo=indirect(pass 2)
-Mipa=fast(pass 2) -Mipa=inline(pass 2) -fastsse
-Mvect=short -Msmartalloc=huge -Mprefetch=t0 -Mpre
-Mfprelaxed -tp shanghai-64 -Bstatic_pgi

481.wrf: -fastsse -Mvect=noaltcode -Msmartalloc=huge
-Mprefetch=distance:8 -Mfprelaxed -tp shanghai-64
-Bstatic_pgi

Peak Other Flags

C benchmarks:

-Mipa=jobs:4(pass 2)

C++ benchmarks:

444.namd: -Mipa=jobs:4(pass 2)

Fortran benchmarks:

410.bwaves: -Mipa=jobs:4

434.zeusmp: -Mipa=jobs:4

437.leslie3d: -Mipa=jobs:4(pass 2)

Benchmarks using both Fortran and C:

436.cactusADM: -Mipa=jobs:4

454.calculix: -Mipa=jobs:4(pass 2)

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.html>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.html

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/x86-open64-4.2.2-flags-revE.xml>

http://www.spec.org/cpu2006/flags/pgi80_linux_flags.20090710.xml

<http://www.spec.org/cpu2006/flags/amd-platform.20090710.xml>



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Sun Microsystems

SPECfp_rate2006 = 247

Sun Blade X6440 (AMD Opteron 8435 2.6GHz)

SPECfp_rate_base2006 = 224

CPU2006 license: 6

Test sponsor: Sun Microsystems

Tested by: Sun Microsystems

Test date: Aug-2009

Hardware Availability: Jul-2009

Software Availability: Apr-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 02:10:33 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 1 September 2009.