



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint®\_rate2006 = 106

PowerEdge R210 (Intel Xeon X3440, 2.53 GHz)

SPECint\_rate\_base2006 = 97.9

CPU2006 license: 55


Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

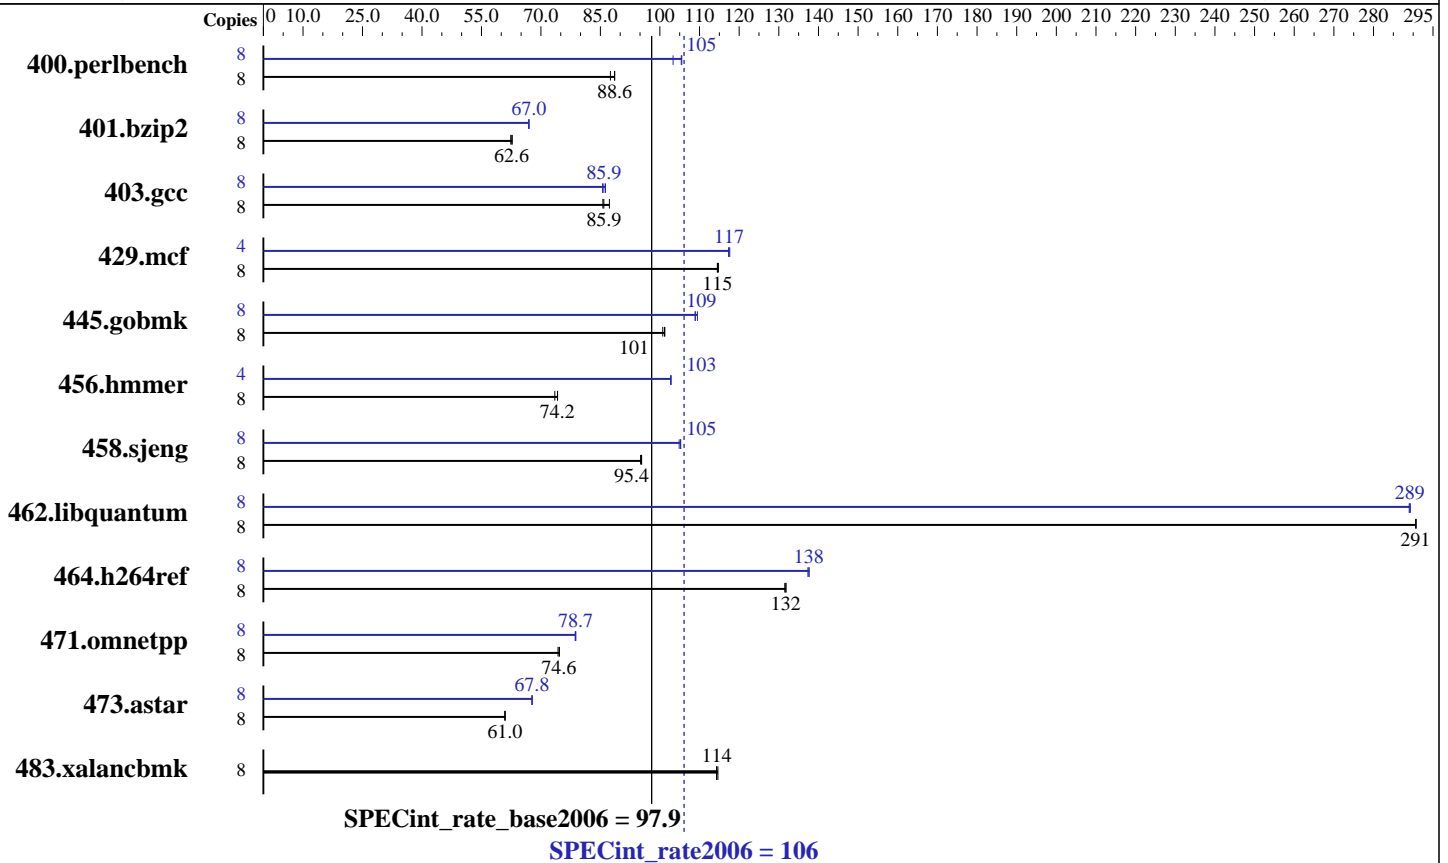

## Hardware

CPU Name: Intel Xeon X3440  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.93 GHz  
 CPU MHz: 2533  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 8 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)  
 Disk Subsystem: 1 x 160 GB 7200 RPM SATA  
 Other Hardware: None

## Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: Intel C++ Compiler Professional Edition 11.1 for Linux Build 20090511 Package ID: I\_cproc\_p\_11.1.040  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 106

PowerEdge R210 (Intel Xeon X3440, 2.53 GHz)

SPECint\_rate\_base2006 = 97.9

CPU2006 license: 55  
Test sponsor: Dell Inc.  
Tested by: Dell Inc.

Test date: Sep-2009  
Hardware Availability: Sep-2009  
Software Availability: Jul-2009

## Results Table

Benchmark	Base						Peak							
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	8	<b>882</b>	<b>88.6</b>	882	88.6	893	87.5	8	756	103	<b>742</b>	<b>105</b>	741	106
401.bzip2	8	1230	62.8	1237	62.4	<b>1232</b>	<b>62.6</b>	8	1153	67.0	<b>1153</b>	<b>67.0</b>	1153	66.9
403.gcc	8	752	85.6	738	87.3	<b>750</b>	<b>85.9</b>	8	753	85.5	746	86.3	<b>750</b>	<b>85.9</b>
429.mcf	8	<b>637</b>	<b>115</b>	636	115	637	115	4	311	117	310	118	<b>311</b>	<b>117</b>
445.gobmk	8	833	101	829	101	<b>829</b>	<b>101</b>	8	771	109	767	109	<b>770</b>	<b>109</b>
456.hammer	8	1006	74.2	1015	73.5	<b>1006</b>	<b>74.2</b>	4	363	103	<b>363</b>	<b>103</b>	363	103
458.sjeng	8	1017	95.1	<b>1015</b>	<b>95.4</b>	1015	95.4	8	923	105	920	105	<b>920</b>	<b>105</b>
462.libquantum	8	570	291	<b>570</b>	<b>291</b>	570	291	8	574	289	573	289	<b>573</b>	<b>289</b>
464.h264ref	8	1346	132	<b>1343</b>	<b>132</b>	1343	132	8	1286	138	1289	137	<b>1287</b>	<b>138</b>
471.omnetpp	8	669	74.7	673	74.3	<b>670</b>	<b>74.6</b>	8	634	78.8	636	78.6	<b>635</b>	<b>78.7</b>
473.astar	8	921	61.0	<b>921</b>	<b>61.0</b>	922	60.9	8	829	67.7	828	67.8	<b>829</b>	<b>67.8</b>
483.xalancbmk	8	481	115	483	114	<b>483</b>	<b>114</b>	8	481	115	483	114	<b>483</b>	<b>114</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

The Dell PowerEdge R210 and the Bull NovaScale R410 F2 models are electronically equivalent.  
This result was measured on a Dell PowerEdge R210.

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 106

PowerEdge R210 (Intel Xeon X3440, 2.53 GHz)

SPECint\_rate\_base2006 = 97.9

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
-opt-malloc-options=3 -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 106

PowerEdge R210 (Intel Xeon X3440, 2.53 GHz)

SPECint\_rate\_base2006 = 97.9

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## Peak Portability Flags (Continued)

458.sjeng: -DSPEC\_CPU\_LP64  
462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias -opt-prefetch  
401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -auto-ilp32  
403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-alloc  
-opt-malloc-options=3  
429.mcf: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch  
445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias  
456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32  
458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32  
462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static  
-opt-malloc-options=3 -opt-prefetch  
464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/spec/cpu2006.1.1/lib -lsmartheap

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECint\_rate2006 = 106

PowerEdge R210 (Intel Xeon X3440, 2.53 GHz)

SPECint\_rate\_base2006 = 97.9

CPU2006 license: 55

Test date: Sep-2009

Test sponsor: Dell Inc.

Hardware Availability: Sep-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

## Peak Optimization Flags (Continued)

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
          -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
          -ansi-alias -opt-ra-region-strategy=routine -auto-ilp32
          -Wl,-z,muldefs -L/spec/cpu2006.1.1/lib -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 03:51:52 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 22 December 2009.