



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp®_rate2006 = 82.8

NovaScale R410 F2 (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 78.5

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Sep-2009

Hardware Availability: Dec-2009

Software Availability: Jul-2009

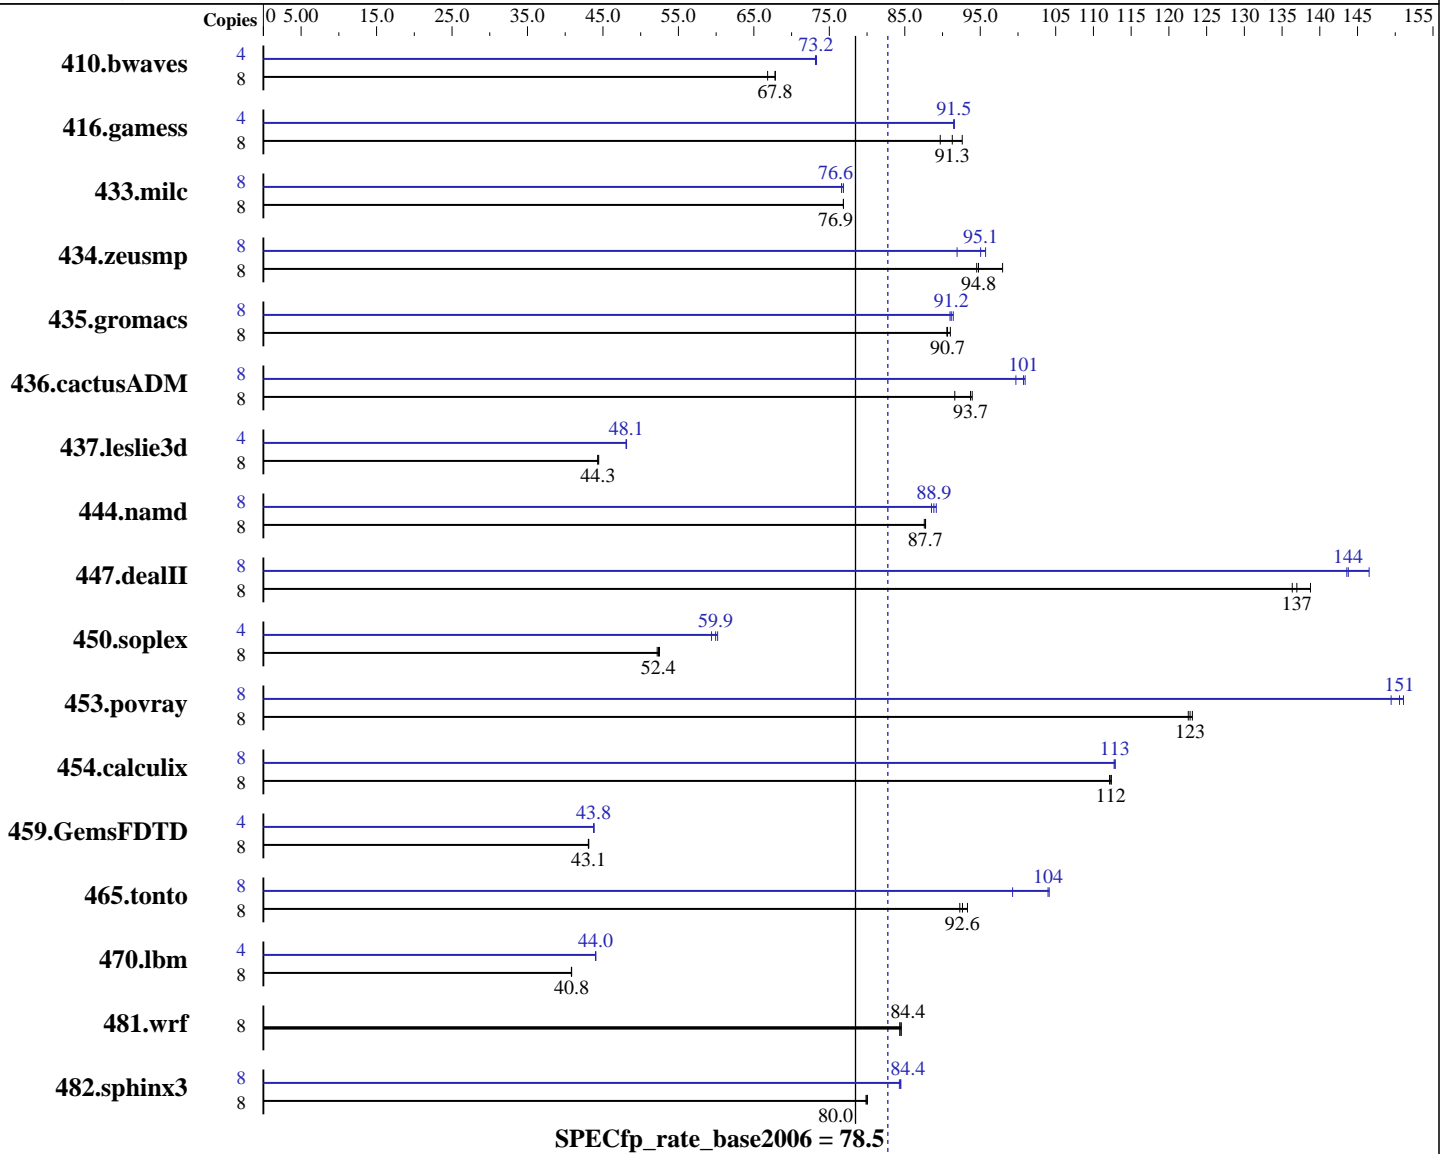

Hardware

CPU Name: Intel Xeon X3460
 CPU Characteristics: Intel Turbo Boost Technology up to 3.46 GHz
 CPU MHz: 2800
 FPU: Integrated
 CPU(s) enabled: 4 cores, 1 chip, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1 chip
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5
 Compiler: Intel Fortran Compiler and Intel C++ Compiler Professional Edition 11.1 For Linux Build 20090511 Package ID: l_cproc_p_11.1.040, l_cprof_p_11.1.040
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 82.8

NovaScale R410 F2 (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 78.5

CPU2006 license: 20

Test date: Sep-2009

Test sponsor: Bull SAS

Hardware Availability: Dec-2009

Tested by: Dell Inc.

Software Availability: Jul-2009

L3 Cache: 8 MB I+D on chip per chip
Other Cache: None
Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)
Disk Subsystem: 1 x 160 GB 7200 RPM SATA
Other Hardware: None

Base Pointers: 64-bit
Peak Pointers: 32/64-bit
Other Software: Binutils 2.18.50.0.7.20080502

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	1627	66.8	1602	67.9	1604	67.8	4	742	73.2	742	73.3	743	73.2
416.gamess	8	1716	91.3	1746	89.7	1691	92.6	4	855	91.6	856	91.5	856	91.5
433.milc	8	955	76.9	955	76.9	955	76.9	8	955	76.9	958	76.6	958	76.6
434.zeusmp	8	768	94.8	770	94.5	743	98.0	8	761	95.7	792	91.9	766	95.1
435.gromacs	8	631	90.6	627	91.0	630	90.7	8	625	91.4	627	91.2	628	91.0
436.cactusADM	8	1018	93.9	1043	91.6	1020	93.7	8	947	101	949	101	959	99.7
437.leslie3d	8	1696	44.3	1697	44.3	1692	44.4	4	782	48.1	781	48.1	782	48.1
444.namd	8	731	87.8	733	87.6	731	87.7	8	719	89.2	725	88.5	722	88.9
447.dealII	8	668	137	671	136	660	139	8	625	147	637	144	637	144
450.soplex	8	1271	52.5	1274	52.4	1278	52.2	4	562	59.4	557	59.9	554	60.2
453.povray	8	347	123	346	123	347	123	8	283	151	285	149	282	151
454.calculix	8	589	112	588	112	587	112	8	585	113	585	113	585	113
459.GemsFDTD	8	1971	43.1	1969	43.1	1969	43.1	4	969	43.8	969	43.8	970	43.8
465.tonto	8	850	92.6	853	92.3	844	93.3	8	793	99.3	757	104	756	104
470.lbm	8	2691	40.8	2691	40.8	2693	40.8	4	1249	44.0	1249	44.0	1247	44.1
481.wrf	8	1057	84.5	1059	84.4	1059	84.4	8	1057	84.5	1059	84.4	1059	84.4
482.sphinx3	8	1950	80.0	1952	79.9	1948	80.1	8	1846	84.4	1850	84.3	1846	84.5

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

Platform Notes

BIOS Settings:
Power Management = Maximum Performance (Default = Active Power Controller)



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 82.8

NovaScale R410 F2 (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 78.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Sep-2009
Hardware Availability: Dec-2009
Software Availability: Jul-2009

General Notes

The Dell PowerEdge R210 (Intel Xeon X3460, 2.80 GHz) and the Bull NovaScale R410 F2 (Intel Xeon X3460, 2.80 GHz) models are electronically equivalent. The results have been measured on a Dell PowerEdge R210 (Intel Xeon X3460, 2.80 GHz) model.

Base Compiler Invocation

C benchmarks:
icc -m64

C++ benchmarks:
icpc -m64

Fortran benchmarks:
ifort -m64

Benchmarks using both Fortran and C:
icc -m64 ifort -m64

Base Portability Flags

410.bwaves: -DSPEC_CPU_LP64
416.gamess: -DSPEC_CPU_LP64
433.milc: -DSPEC_CPU_LP64
434.zeusmp: -DSPEC_CPU_LP64
435.gromacs: -DSPEC_CPU_LP64 -nofor_main
436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
437.leslie3d: -DSPEC_CPU_LP64
444.namd: -DSPEC_CPU_LP64
447.dealII: -DSPEC_CPU_LP64
450.soplex: -DSPEC_CPU_LP64
453.povray: -DSPEC_CPU_LP64
454.calculix: -DSPEC_CPU_LP64 -nofor_main
459.GemsFDTD: -DSPEC_CPU_LP64
465.tonto: -DSPEC_CPU_LP64
470.lbm: -DSPEC_CPU_LP64
481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX
482.sphinx3: -DSPEC_CPU_LP64

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 82.8

NovaScale R410 F2 (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 78.5

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Sep-2009

Hardware Availability: Dec-2009

Software Availability: Jul-2009

Base Optimization Flags (Continued)

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

482.sphinx3: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

450.soplex: icpc -m32

Fortran benchmarks (except as noted below):

ifort -m64

437.leslie3d: ifort -m32

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

Peak Portability Flags

410.bwaves: -DSPEC_CPU_LP64
 416.gamess: -DSPEC_CPU_LP64
 433.milc: -DSPEC_CPU_LP64
 434.zeusmp: -DSPEC_CPU_LP64
 435.gromacs: -DSPEC_CPU_LP64 -nofor_main
 436.cactusADM: -DSPEC_CPU_LP64 -nofor_main
 444.namd: -DSPEC_CPU_LP64
 447.dealII: -DSPEC_CPU_LP64
 453.povray: -DSPEC_CPU_LP64
 454.calculix: -DSPEC_CPU_LP64 -nofor_main
 459.GemsFDTD: -DSPEC_CPU_LP64
 465.tonto: -DSPEC_CPU_LP64
 470.lbm: -DSPEC_CPU_LP64
 481.wrf: -DSPEC_CPU_LP64 -DSPEC_CPU_CASE_FLAG -DSPEC_CPU_LINUX



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 82.8

NovaScale R410 F2 (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 78.5

CPU2006 license: 20
Test sponsor: Bull SAS
Tested by: Dell Inc.

Test date: Sep-2009
Hardware Availability: Dec-2009
Software Availability: Jul-2009

Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -opt-malloc-options=3 -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-fno-alias -auto-ilp32

447.dealIII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -ansi-alias -scalar-rep-

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)

437.leslie3d: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-malloc-options=3 -opt-prefetch

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -Ob0 -opt-prefetch

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Bull SAS

SPECfp_rate2006 = 82.8

NovaScale R410 F2 (Intel Xeon X3460, 2.80 GHz)

SPECfp_rate_base2006 = 78.5

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Sep-2009

Hardware Availability: Dec-2009

Software Availability: Jul-2009

Peak Optimization Flags (Continued)

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll4 -auto

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)
-unroll2 -opt-prefetch -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-fp-linux64-revA.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 04:00:23 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 22 December 2009.