



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

### SPECint®\_rate2006 = 61.3

### NovaScale T810 F2 (Intel Core i3-530, 2.93 GHz)

### SPECint\_rate\_base2006 = 56.9

CPU2006 license: 20


Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

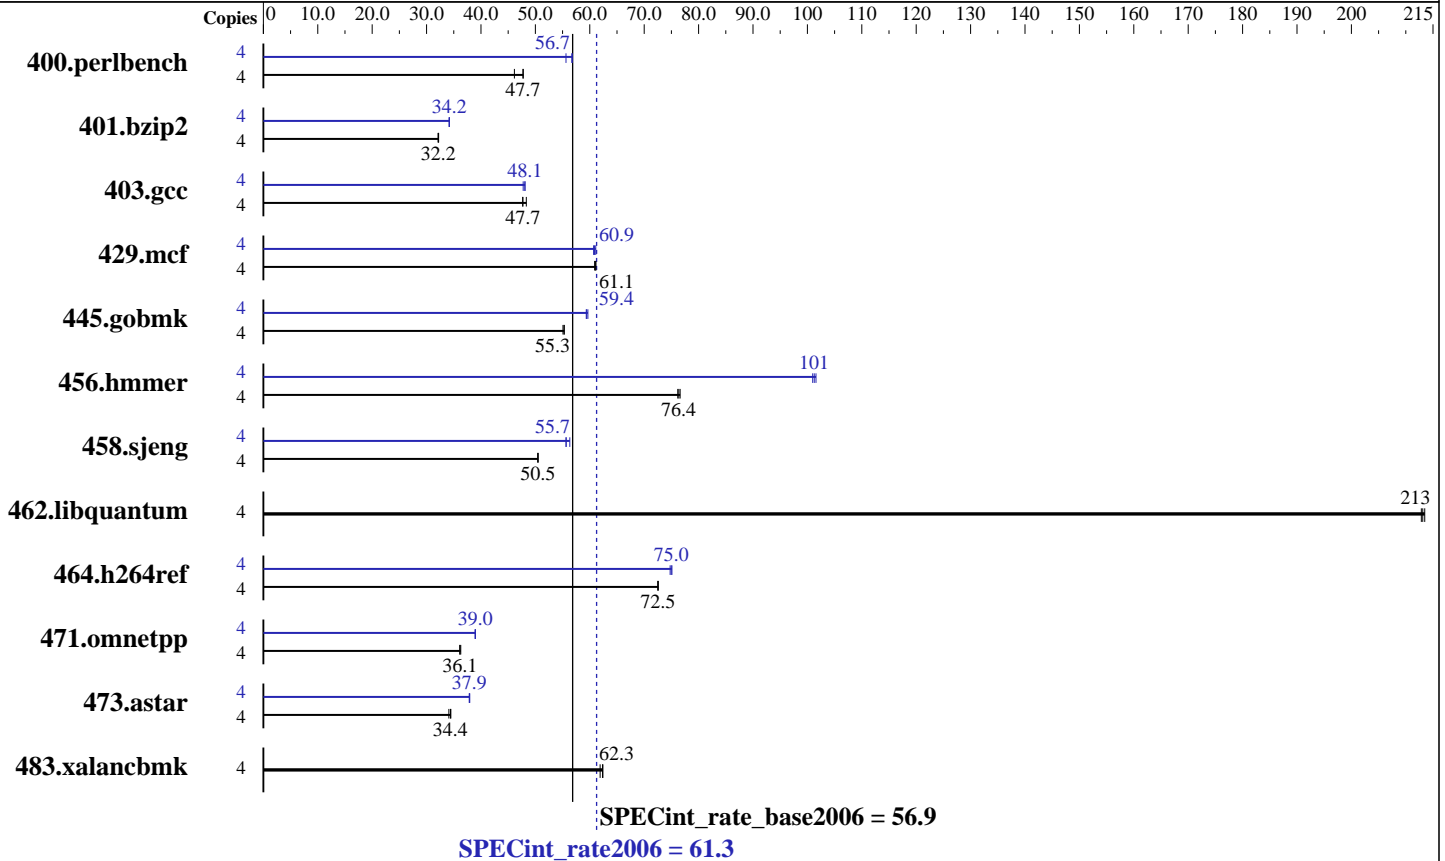

### Hardware

CPU Name: Intel Core i3-530  
 CPU Characteristics:  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 2 cores, 1 chip, 2 cores/chip, 2 threads/core  
 CPU(s) orderable: 1 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 4 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 8 GB (4 x 2 GB DDR3-1333 DR UDIMM)  
 Disk Subsystem: 1 x 160 GB 7200 RPM SATA  
 Other Hardware: None

### Software

Operating System: Red Hat Enterprise Linux Server release 5.3, Kernel 2.6.18-128.el5  
 Compiler: Intel C++ Compiler Professional Edition 11.1 for Linux Build 20091012 Package ID: 1\_cproc\_p\_11.1.059  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1 Binutils 2.18.50.0.7.20080502



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 61.3

NovaScale T810 F2 (Intel Core i3-530, 2.93 GHz)

SPECint\_rate\_base2006 = 56.9

CPU2006 license: 20  
Test sponsor: Bull SAS  
Tested by: Dell Inc.

Test date: Jan-2010  
Hardware Availability: Jan-2010  
Software Availability: Dec-2009

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	4	818	47.8	847	46.1	<b>819</b>	<b>47.7</b>	4	688	56.8	703	55.6	<b>689</b>	<b>56.7</b>
401.bzip2	4	<b>1200</b>	<b>32.2</b>	1202	32.1	1198	32.2	4	1129	34.2	<b>1129</b>	<b>34.2</b>	1130	34.1
403.gcc	4	666	48.3	<b>675</b>	<b>47.7</b>	676	47.7	4	<b>670</b>	<b>48.1</b>	674	47.8	669	48.1
429.mcf	4	597	61.1	599	60.9	<b>597</b>	<b>61.1</b>	4	<b>599</b>	<b>60.9</b>	597	61.1	601	60.7
445.gobmk	4	762	55.1	759	55.3	<b>759</b>	<b>55.3</b>	4	703	59.6	707	59.4	<b>706</b>	<b>59.4</b>
456.hammer	4	487	76.6	490	76.2	<b>489</b>	<b>76.4</b>	4	370	101	<b>369</b>	<b>101</b>	367	102
458.sjeng	4	959	50.5	<b>959</b>	<b>50.5</b>	959	50.5	4	859	56.3	<b>870</b>	<b>55.7</b>	870	55.6
462.libquantum	4	389	213	<b>389</b>	<b>213</b>	388	213	4	389	213	<b>389</b>	<b>213</b>	388	213
464.h264ref	4	<b>1220</b>	<b>72.5</b>	1220	72.6	1221	72.5	4	1184	74.8	<b>1181</b>	<b>75.0</b>	1179	75.1
471.omnetpp	4	689	36.3	<b>692</b>	<b>36.1</b>	692	36.1	4	641	39.0	<b>642</b>	<b>39.0</b>	642	38.9
473.astar	4	824	34.1	815	34.5	<b>817</b>	<b>34.4</b>	4	740	37.9	<b>742</b>	<b>37.9</b>	742	37.9
483.xalancbmk	4	<b>443</b>	<b>62.3</b>	446	61.9	442	62.4	4	<b>443</b>	<b>62.3</b>	446	61.9	442	62.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS Settings:  
Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

The Dell PowerEdge T110 and the Bull NovaScale T810 F2 models are electronically equivalent.  
This result was measured on a Dell PowerEdge T110.

## Base Compiler Invocation

C benchmarks:  
icc -m32  
  
C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 61.3**

NovaScale T810 F2 (Intel Core i3-530, 2.93 GHz)

**SPECint\_rate\_base2006 = 56.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jan-2010

**Hardware Availability:** Jan-2010

**Software Availability:** Dec-2009

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libic11.1-32bit -lsmartheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64  
456.hmmer: -DSPEC\_CPU\_LP64  
458.sjeng: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Bull SAS

SPECint\_rate2006 = 61.3

NovaScale T810 F2 (Intel Core i3-530, 2.93 GHz)

SPECint\_rate\_base2006 = 56.9

CPU2006 license: 20

Test sponsor: Bull SAS

Tested by: Dell Inc.

Test date: Jan-2010

Hardware Availability: Jan-2010

Software Availability: Dec-2009

## Peak Portability Flags (Continued)

462.libquantum: -DSPEC\_CPU\_LINUX  
473.astar: -DSPEC\_CPU\_LP64  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
-ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**Bull SAS**

**SPECint\_rate2006 = 61.3**

NovaScale T810 F2 (Intel Core i3-530, 2.93 GHz)

**SPECint\_rate\_base2006 = 56.9**

**CPU2006 license:** 20

**Test sponsor:** Bull SAS

**Tested by:** Dell Inc.

**Test date:** Jan-2010

**Hardware Availability:** Jan-2010

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

483.xalanbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.20100216.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-int-linux64-revA.20100216.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 06:35:59 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 16 February 2010.