



SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp®_rate2006 = 1760

IBM Power 770 (3.5 GHz, 48 core)

SPECfp_rate_base2006 = 1560

CPU2006 license: 11


Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

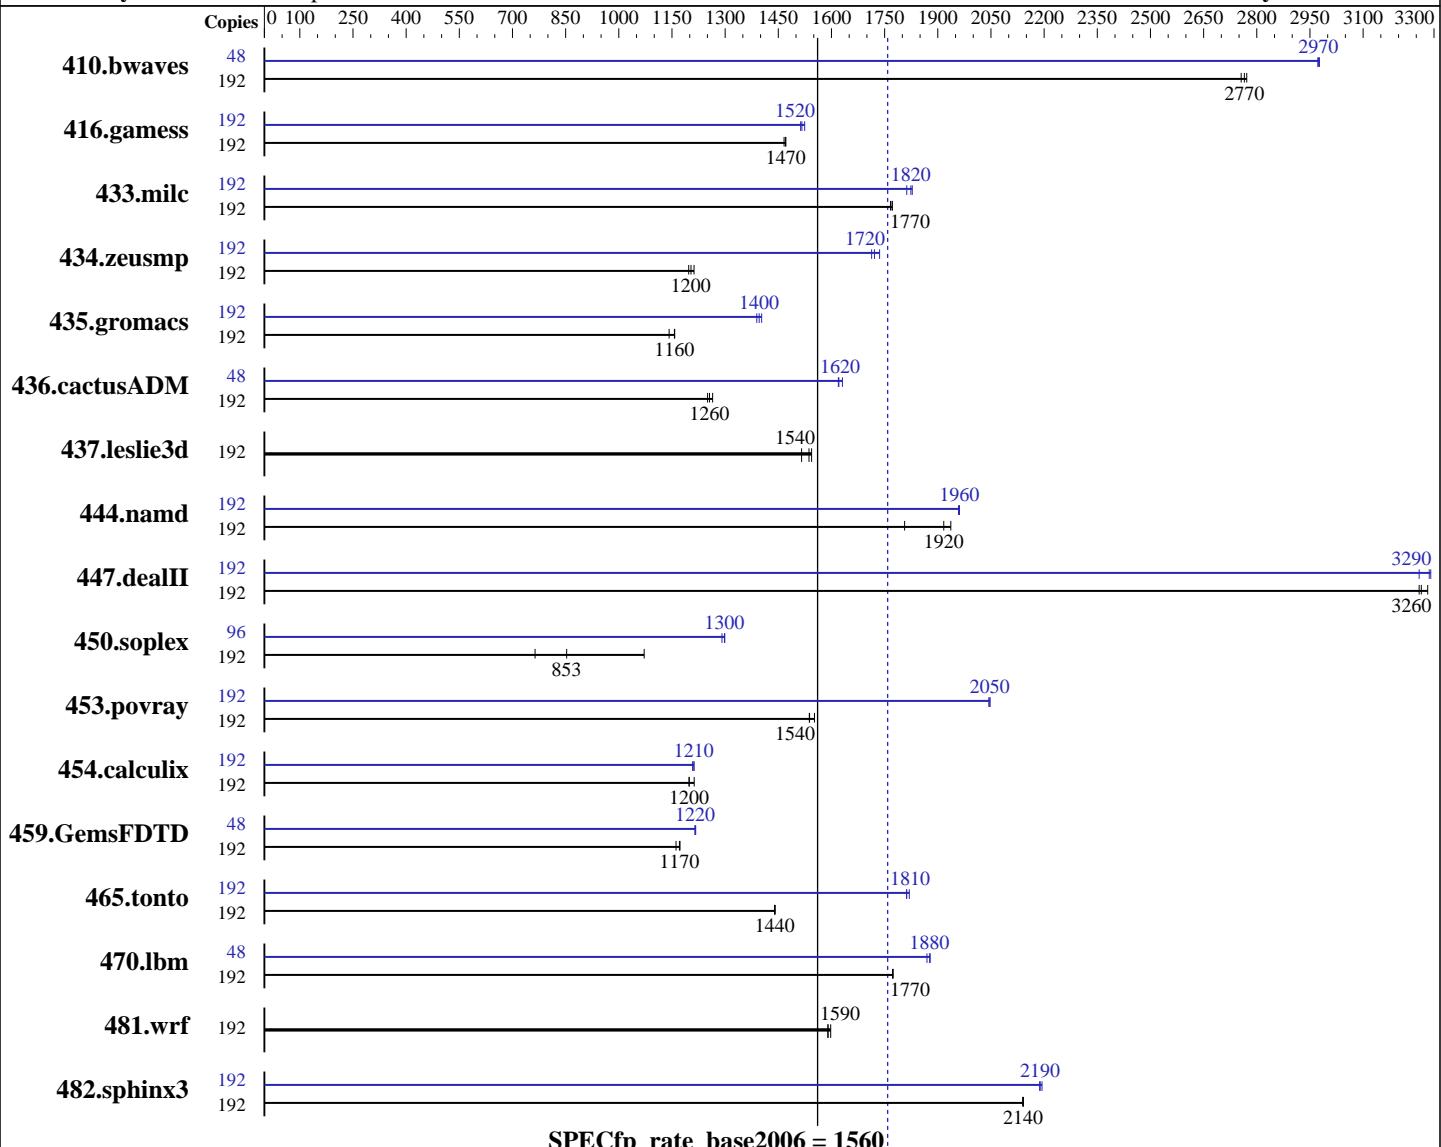

SPECfp_rate_base2006 = 1560

SPECfp_rate2006 = 1760

Hardware

CPU Name: POWER7
CPU Characteristics: Intelligent Energy Optimization enabled, up to 3.75 GHz
CPU MHz: 3500
FPU: Integrated
CPU(s) enabled: 48 cores, 8 chips, 6 cores/chip, 4 threads/core
CPU(s) orderable: 12,16,24,32,36,48,64 cores
Primary Cache: 32 KB I + 32 KB D on chip per core

Software

Operating System: IBM AIX V6.1 with the 6100-04 Technology Level and Service Pack 3
Compiler: XL C/C++ Enterprise Edition V10.1.0.5 for AIX
XL Fortran Enterprise Edition V12.1.0.6 for AIX
Auto Parallel: No
File System: AIX/JFS2
System State: Multi-user
Base Pointers: 32-bit
Peak Pointers: 32/64-bit

Continued on next page

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1760

IBM Power 770 (3.5 GHz, 48 core)

SPECfp_rate_base2006 = 1560

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 4 MB I+D on chip per core
 Other Cache: None
 Memory: 512 GB (64x8 GB) DDR3 1066 MHz
 Disk Subsystem: 12x146.8 GB SAS SFF 15K RPM
 Other Hardware: None

Other Software: None

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	192	941	2770	947	2760	944	2770	48	219	2970	219	2980	219	2970
416.gamess	192	2556	1470	2556	1470	2564	1470	192	2466	1520	2485	1510	2479	1520
433.milc	192	995	1770	998	1770	995	1770	192	964	1830	973	1810	966	1820
434.zeusmp	192	1452	1200	1459	1200	1441	1210	192	1020	1710	1015	1720	1007	1740
435.gromacs	192	1200	1140	1184	1160	1185	1160	192	987	1390	982	1400	977	1400
436.cactusADM	192	1827	1260	1814	1260	1835	1250	48	354	1620	354	1620	352	1630
437.leslie3d	192	1191	1520	1169	1540	1175	1540	192	1191	1520	1169	1540	1175	1540
444.namd	192	852	1810	803	1920	795	1940	192	785	1960	785	1960	786	1960
447.dealII	192	669	3280	673	3260	674	3260	192	674	3260	667	3290	668	3290
450.soplex	192	1494	1070	2097	764	1877	853	96	617	1300	616	1300	620	1290
453.povray	192	658	1550	664	1540	664	1540	192	499	2050	499	2050	500	2040
454.calculix	192	1322	1200	1322	1200	1306	1210	192	1307	1210	1307	1210	1311	1210
459.GemsFDTD	192	1740	1170	1737	1170	1754	1160	48	419	1220	418	1220	419	1210
465.tonto	192	1313	1440	1312	1440	1311	1440	192	1043	1810	1043	1810	1038	1820
470.lbm	192	1488	1770	1487	1770	1488	1770	48	353	1870	351	1880	351	1880
481.wrf	192	1349	1590	1349	1590	1342	1600	192	1349	1590	1349	1590	1342	1600
482.sphinx3	192	1749	2140	1748	2140	1748	2140	192	1711	2190	1706	2190	1710	2190

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Peak Tuning Notes

fdpr binary optimization tool used for 410.bwaves
 with options -O3 -vrox -pbsi -A 64
 fdpr binary optimization tool used for 433.milc
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 434.zeusmp
 with options -O3 -vrox -sdp 9
 fdpr binary optimization tool used for 435.gromacs
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 437.leslie3d
 with options -O4 -vrox -pbsi
 fdpr binary optimization tool used for 450.soplex
 with options -O3 -vrox -sdp 9
 fdpr binary optimization tool used for 453.povray

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1760

IBM Power 770 (3.5 GHz, 48 core)

SPECfp_rate_base2006 = 1560

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Tuning Notes (Continued)

```
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 454.calculix
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 459.GemsFDTD
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 470.lbm
with options -O3 -vrox -sdp 9
fdpr binary optimization tool used for 481.wrf
with options -O4 -vrox -pbsi
fdpr binary optimization tool used for 482.sphinx3
with options -O4 -vrox -pbsi
```

Submit Notes

The config file option 'submit' was used
to assign benchmark copy to specific kernel thread using
the "bindprocessor" command (see flags file for details).

Operating System Notes

all ulimits set to unlimited.
19200 16M large pages defined with vmo command

General Notes

Environment variables set by runspec before the start of the run:
MALLOCOPTIONS = "pool"
MEMORY_AFFINITY = "MCM"
XLF RTEOPTS = "intrinthds=1"

See the flags file for details on settings.

Base Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1760

IBM Power 770 (3.5 GHz, 48 core)

SPECfp_rate_base2006 = 1560

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Base Portability Flags

```
410.bwaves: -qfixed  
416.gamess: -qfixed  
434.zeusmp: -qfixed  
435.gromacs: -qfixed -qextname  
436.cactusADM: -qfixed -qextname  
437.leslie3d: -qfixed  
454.calculix: -qfixed -qextname  
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE  
482.sphinx3: -qchars=signed
```

Base Optimization Flags

C benchmarks:

```
-bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS -blpdata
```

C++ benchmarks:

```
-bmaxdata:0x50000000 -O5 -qlargepage -D_ILS_MACROS -qrtti=all  
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
```

Fortran benchmarks:

```
-bmaxdata:0x60000000 -O5 -qlargepage -qsmallstack=dynlenonheap  
-qalias=nostd -blpdata
```

Benchmarks using both Fortran and C:

```
-bmaxdata:0x60000000 -O5 -qlargepage -D_ILS_MACROS  
-qsmallstack=dynlenonheap -qalias=nostd -blpdata
```

Base Other Flags

C benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

C++ benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-036
```

Fortran benchmarks:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```

Benchmarks using both Fortran and C:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1760

IBM Power 770 (3.5 GHz, 48 core)

SPECfp_rate_base2006 = 1560

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Compiler Invocation

C benchmarks:

/usr/vac/bin/xlc -qlanglvl=extc99

C++ benchmarks:

/usr/vacpp/bin/xlc

Fortran benchmarks:

/usr/bin/xlf95

Benchmarks using both Fortran and C:

/usr/vac/bin/xlc -qlanglvl=extc99 /usr/bin/xlf95

Peak Portability Flags

410.bwaves: -qfixed
416.gamess: -qfixed
434.zeusmp: -qfixed
435.gromacs: -qfixed -qextname
436.cactusADM: -qfixed -qextname
437.leslie3d: -qfixed
454.calculix: -qfixed -qextname
481.wrf: -DSPEC_CPU_AIX -DNOUNDERSCORE
482.sphinx3: -qchars=signed

Peak Optimization Flags

C benchmarks:

433.milc: -bmaxdata:0x40000000 -O5 -qlargepage -D_ILS_MACROS
-qalign=natural -qfdpr -blpdata

470.lbm: -qpdf1(pass 1) -qpdf2(pass 2) -O3 -qarch=auto -qtune=auto
-qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

482.sphinx3: -qpdf1(pass 1) -qpdf2(pass 2) -O4 -qlargepage
-D_ILS_MACROS -qfdpr -blpdata

C++ benchmarks:

444.namd: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -qlargepage
-D_ILS_MACROS -blpdata

447.dealII: -bmaxdata:0x50000000 -O5 -D_ILS_MACROS -qrtti=all
-D__IBM_FAST_VECTOR -D__IBM_FAST_SET_MAP_ITERATOR -blpdata
-btextpsize:64K

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1760

IBM Power 770 (3.5 GHz, 48 core)

SPECfp_rate_base2006 = 1560

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

450.soplex: -O3 -qarch=auto -qtune=auto -qlargepage -q64
-D_ILS_MACROS -qfdpr -blpdata

453.povray: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS
-qalign=natural -qfdpr -btextpsize:64K

Fortran benchmarks:

410.bwaves: -bmaxdata:0x50000000 -O5 -qlargepage -qenablevmx -qvecnvol
-qfdpr -qsmallstack=dynlenonheap -blpdata

416.gamess: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-qlargepage -qalias=nostd -blpdata

434.zeusmp: -bmaxdata:0x40000000 -qpdf1(pass 1) -qpdf2(pass 2) -O3
-qarch=auto -qtune=auto -qlargepage -qenablevmx -qvecnvol
-qxl90=nosignedzero -qfdpr -blpdata

437.leslie3d: basepeak = yes

459.GemsFDTD: -O4 -qlargepage -q64 -qfdpr -blpdata

465.tonto: -bmaxdata:0x50000000 -qpdf1(pass 1) -qpdf2(pass 2) -O5
-blpdata -btextpsize:64K

Benchmarks using both Fortran and C:

435.gromacs: -qpdf1(pass 1) -qpdf2(pass 2) -O5 -D_ILS_MACROS -qfdpr

436.cactusADM: -bmaxdata:0x60000000 -qpdf1(pass 1) -qpdf2(pass 2) -O2
-qarch=auto -qtune=auto -qenablevmx -qvecnvol
-D_ILS_MACROS -qfdpr -qnostrict -blpdata -btextpsize:64K

454.calculix: -O4 -qlargepage -q64 -D_ILS_MACROS -qfdpr -blpdata

481.wrf: basepeak = yes

Peak Other Flags

C benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

C++ benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-036

Fortran benchmarks:

-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg
-qsuppress=1500-036

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECfp_rate2006 = 1760

IBM Power 770 (3.5 GHz, 48 core)

SPECfp_rate_base2006 = 1560

CPU2006 license: 11

Test date: Jan-2010

Test sponsor: IBM Corporation

Hardware Availability: Mar-2010

Tested by: IBM Corporation

Software Availability: Mar-2010

Peak Other Flags (Continued)

Benchmarks using both Fortran and C:

```
-qipa=threads -qipa=noobject -qsuppress=1500-010 -qsuppress=cmpmsg  
-qsuppress=1500-036
```

The flags files that were used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.html>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.html>

You can also download the XML flags sources by saving the following links:

<http://www.spec.org/cpu2006/flags/IBM-XL.20100303.xml>
<http://www.spec.org/cpu2006/flags/IBM-AIX.20100303.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:04:02 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 3 March 2010.