



SPEC[®] CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp[®]_rate2006 = 136

HP Integrity BL860c i2 (1.73 GHz/24MB Quad-Core Intel Itanium 9350)

SPECfp_rate_base2006 = 132

CPU2006 license: 03


Test date: Jan-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

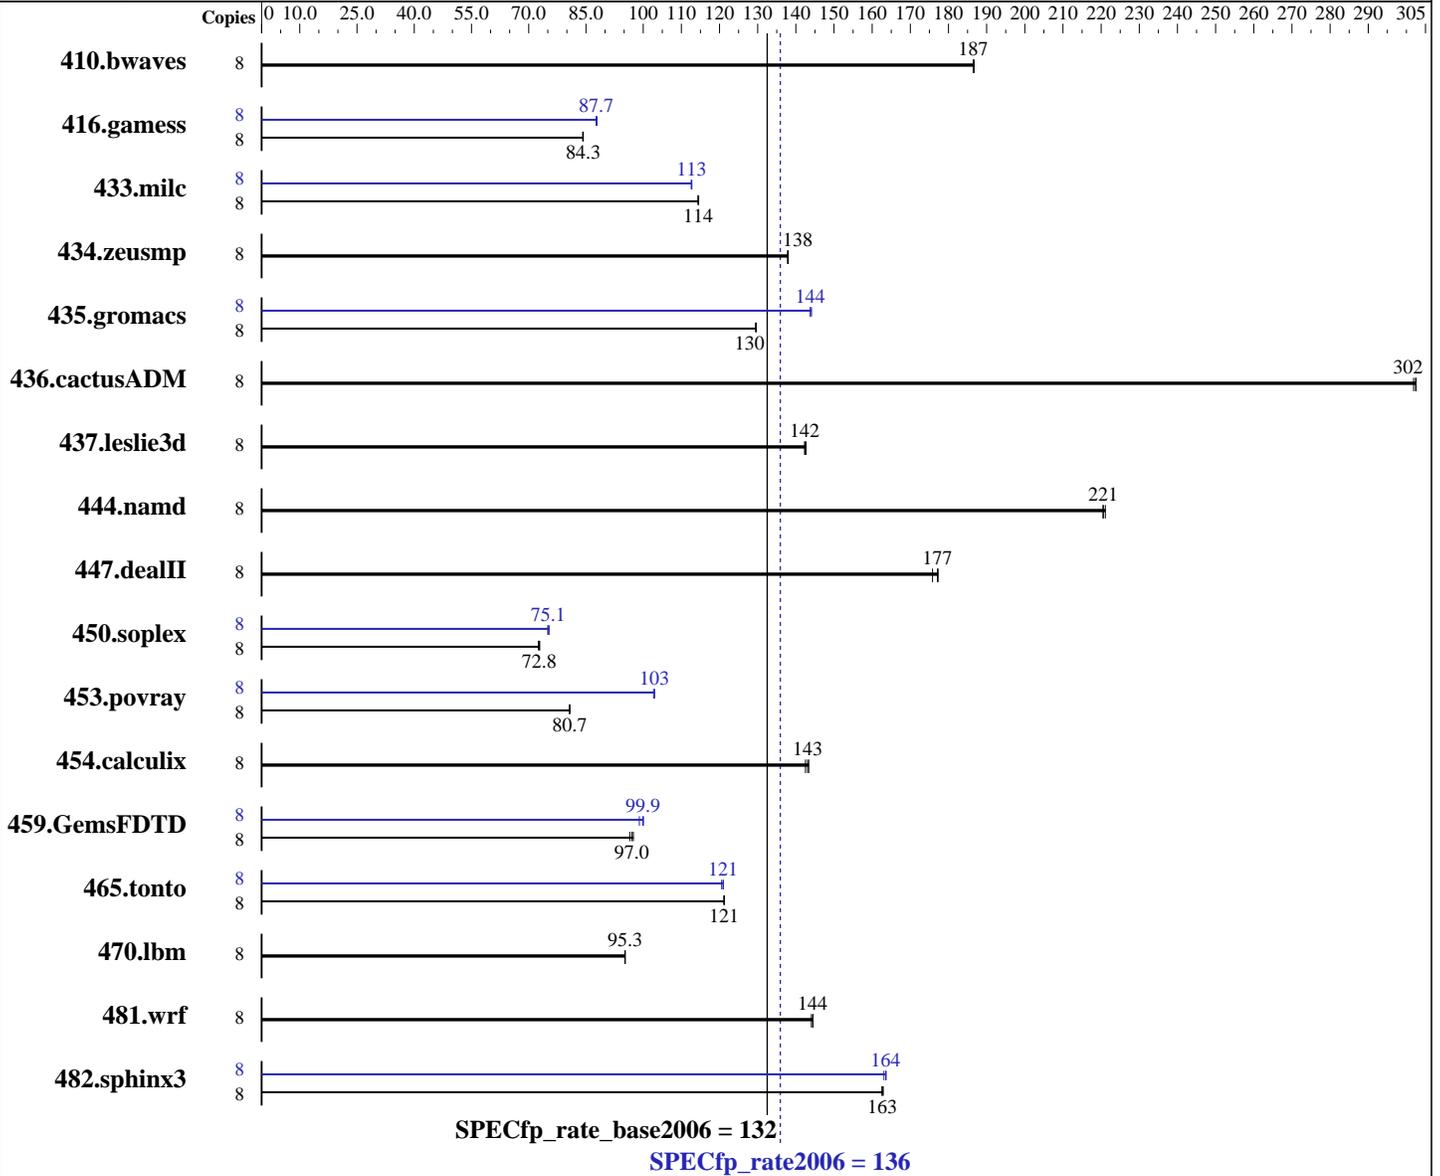

Hardware

CPU Name: Intel Itanium 9350
 CPU Characteristics: Intel Turbo Boost Technology up to 1.86 GHz
 CPU MHz: 1730
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1-2 chips
 Primary Cache: 16 KB I + 16 KB D on chip per core
 Secondary Cache: 512 KB I + 256 KB D on chip per core

Continued on next page

Software

Operating System: HP-UX 11i v3 Data Center Operating Environment B.11.31.1003
 Compiler: HP C/aC++ Developer's Bundle C.11.31.05
 HP Fortran 90 Compiler B.11.31.10
 Auto Parallel: No
 File System: vxfs
 System State: Multi-user
 Base Pointers: 32-bit
 Peak Pointers: 32-bit

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 136

HP Integrity BL860c i2 (1.73 GHz/24MB Quad-Core Intel Itanium 9350)

SPECfp_rate_base2006 = 132

CPU2006 license: 03

Test date: Jan-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

L3 Cache: 6 MB I+D on chip per core
Other Cache: None
Memory: 32 GB (16 x 2GB 2Rx8 PC3-10600R)
Disk Subsystem: 1 x 73 GB 15K RPM SAS
Other Hardware: None

Other Software: MallocNextGen B.11.31.0903.02

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	8	582	187	583	187	583	186	8	582	187	583	187	583	186
416.gamess	8	1858	84.3	1859	84.3	1862	84.1	8	1782	87.9	1787	87.6	1787	87.7
433.milc	8	642	114	642	114	641	115	8	651	113	652	113	652	113
434.zeusmp	8	528	138	528	138	528	138	8	528	138	528	138	528	138
435.gromacs	8	441	130	441	130	441	129	8	396	144	397	144	397	144
436.cactusADM	8	316	302	316	303	317	302	8	316	302	316	303	317	302
437.leslie3d	8	528	142	527	143	528	142	8	528	142	527	143	528	142
444.namd	8	291	221	290	221	291	220	8	291	221	290	221	291	220
447.dealII	8	521	176	517	177	516	177	8	521	176	517	177	516	177
450.soplex	8	920	72.5	917	72.8	915	72.9	8	889	75.0	889	75.1	885	75.4
453.povray	8	527	80.7	527	80.8	528	80.6	8	414	103	413	103	414	103
454.calculix	8	463	143	461	143	460	143	8	463	143	461	143	460	143
459.GemsFDTD	8	875	97.0	880	96.5	871	97.4	8	848	100	858	99.0	850	99.9
465.tonto	8	649	121	650	121	649	121	8	651	121	653	121	651	121
470.lbm	8	1154	95.2	1154	95.3	1154	95.3	8	1154	95.2	1154	95.3	1154	95.3
481.wrf	8	620	144	618	144	619	144	8	620	144	618	144	619	144
482.sphinx3	8	959	163	957	163	958	163	8	956	163	953	164	953	164

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.

Operating System Notes

The following kernel tunables were set, in addition to the defaults set by the Base Operating Environment:

```
filecache_max=25%
filecache_min=25%
maxdsiz=3221225472
fcache_fb_policy=1
base_pagesize=64
pagezero_daemon_enabled=0
```

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 136

HP Integrity BL860c i2 (1.73 GHz/24MB
Quad-Core Intel Itanium 9350)

SPECfp_rate_base2006 = 132

CPU2006 license: 03

Test date: Jan-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Operating System Notes (Continued)

```
vxfs_ifree_timelag=-1
maxssiz=0x17f00000
lcpu_attr=0
```

Platform Notes

Use of Hardware Threading by the OS was disabled via kctune
The following config file entry was used to bind
processes to cores using the HP-UX "mpsched" utility:
submit = let "MYCPU=\\$SPECCOPYNUM*2" ;mpsched -c \\$MYCPU \$command

Base Compiler Invocation

C benchmarks:

```
/opt/ansic/bin/cc -AC99
```

C++ benchmarks:

```
/opt/aCC/bin/aCC -Aa
```

Fortran benchmarks:

```
/opt/fortran90/bin/f90
```

Benchmarks using both Fortran and C:

```
/opt/ansic/bin/cc -AC99 /opt/fortran90/bin/f90
```

Base Portability Flags

```
453.povray: -DSPEC_CPU_NEED_INVHYP
481.wrf: -DNOUNDERSCORE +noppu
```

Base Optimization Flags

C benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-aarchive_shared -Wl,+pd,64M
-Wl,+pi,64K -Wl,-N
```

C++ benchmarks:

```
+Ofaster +Otype_safety=ansi -Wl,-aarchive_shared -Wl,+pd,64M
-Wl,+pi,64K -Wl,-N -lmallocong
```

Fortran benchmarks:

```
+Ofaster -Wl,-aarchive_shared -Wl,+pd,64M -Wl,+pi,64K -Wl,-N
```

Benchmarks using both Fortran and C:

```
+Ofaster +Otype_safety=ansi -Wl,-aarchive_shared -Wl,+pd,64M
-Wl,+pi,64K -Wl,-N
```



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 136

HP Integrity BL860c i2 (1.73 GHz/24MB
Quad-Core Intel Itanium 9350)

SPECfp_rate_base2006 = 132

CPU2006 license: 03

Test date: Jan-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Peak Compiler Invocation

C benchmarks:

`/opt/ansic/bin/cc -AC99`

C++ benchmarks:

`/opt/aCC/bin/aCC -Aa`

Fortran benchmarks:

`/opt/fortran90/bin/f90`

Benchmarks using both Fortran and C:

`/opt/ansic/bin/cc -AC99 /opt/fortran90/bin/f90`

Peak Portability Flags

453.povray: `-DSPEC_CPU_NEED_INVHYP`

481.wrf: `-DNOUNDERSCORE +noppu`

Peak Optimization Flags

C benchmarks:

433.milc: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N`

470.lbm: `basepeak = yes`

482.sphinx3: `Same as 433.milc`

C++ benchmarks:

444.namd: `basepeak = yes`

447.dealII: `basepeak = yes`

450.soplex: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M +Onoparmsoverlap -Wl,-N -lmallocng`

453.povray: `+Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl,-a,archive_shared -Wl,+pd,64M
-Wl,+pi,64M -Wl,-N -lmallocng`

Fortran benchmarks:

Continued on next page



SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Hewlett-Packard Company

SPECfp_rate2006 = 136

HP Integrity BL860c i2 (1.73 GHz/24MB
Quad-Core Intel Itanium 9350)

SPECfp_rate_base2006 = 132

CPU2006 license: 03

Test date: Jan-2010

Test sponsor: Hewlett-Packard Company

Hardware Availability: May-2010

Tested by: Hewlett-Packard Company

Software Availability: Mar-2010

Peak Optimization Flags (Continued)

410.bwaves: basepeak = yes

416.gamess: +Ofaster -Wl, -a, archive_shared -Wl, +pd, 64M -Wl, +pi, 64M
+Odataprefetch=direct -Wl, -N

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
-Wl, -a, archive_shared -Wl, +pd, 64M -Wl, +pi, 64M
+Odataprefetch=direct -Wl, -N

465.tonto: Same as 459.GemsFDTD

Benchmarks using both Fortran and C:

435.gromacs: +Oprofile=collect:all(pass 1) +Oprofile=use(pass 2) +Ofaster
+Otype_safety=ansi -Wl, -a, archive_shared -Wl, +pd, 64M
-Wl, +pi, 64M +Onoparmsoverlap -Wl, -N

436.cactusADM: basepeak = yes

454.calculix: basepeak = yes

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Itanium-HPUX-1003-flags.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Itanium-HPUX-1003-flags.xml>

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 06:44:44 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 2 March 2010.