



# SPEC® CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## Dell Inc.

SPECfp®2006 = 32.1

PowerEdge R810 (Intel Xeon E6540, 2.00 GHz)

SPECfp\_base2006 = 30.0

CPU2006 license: 55


Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

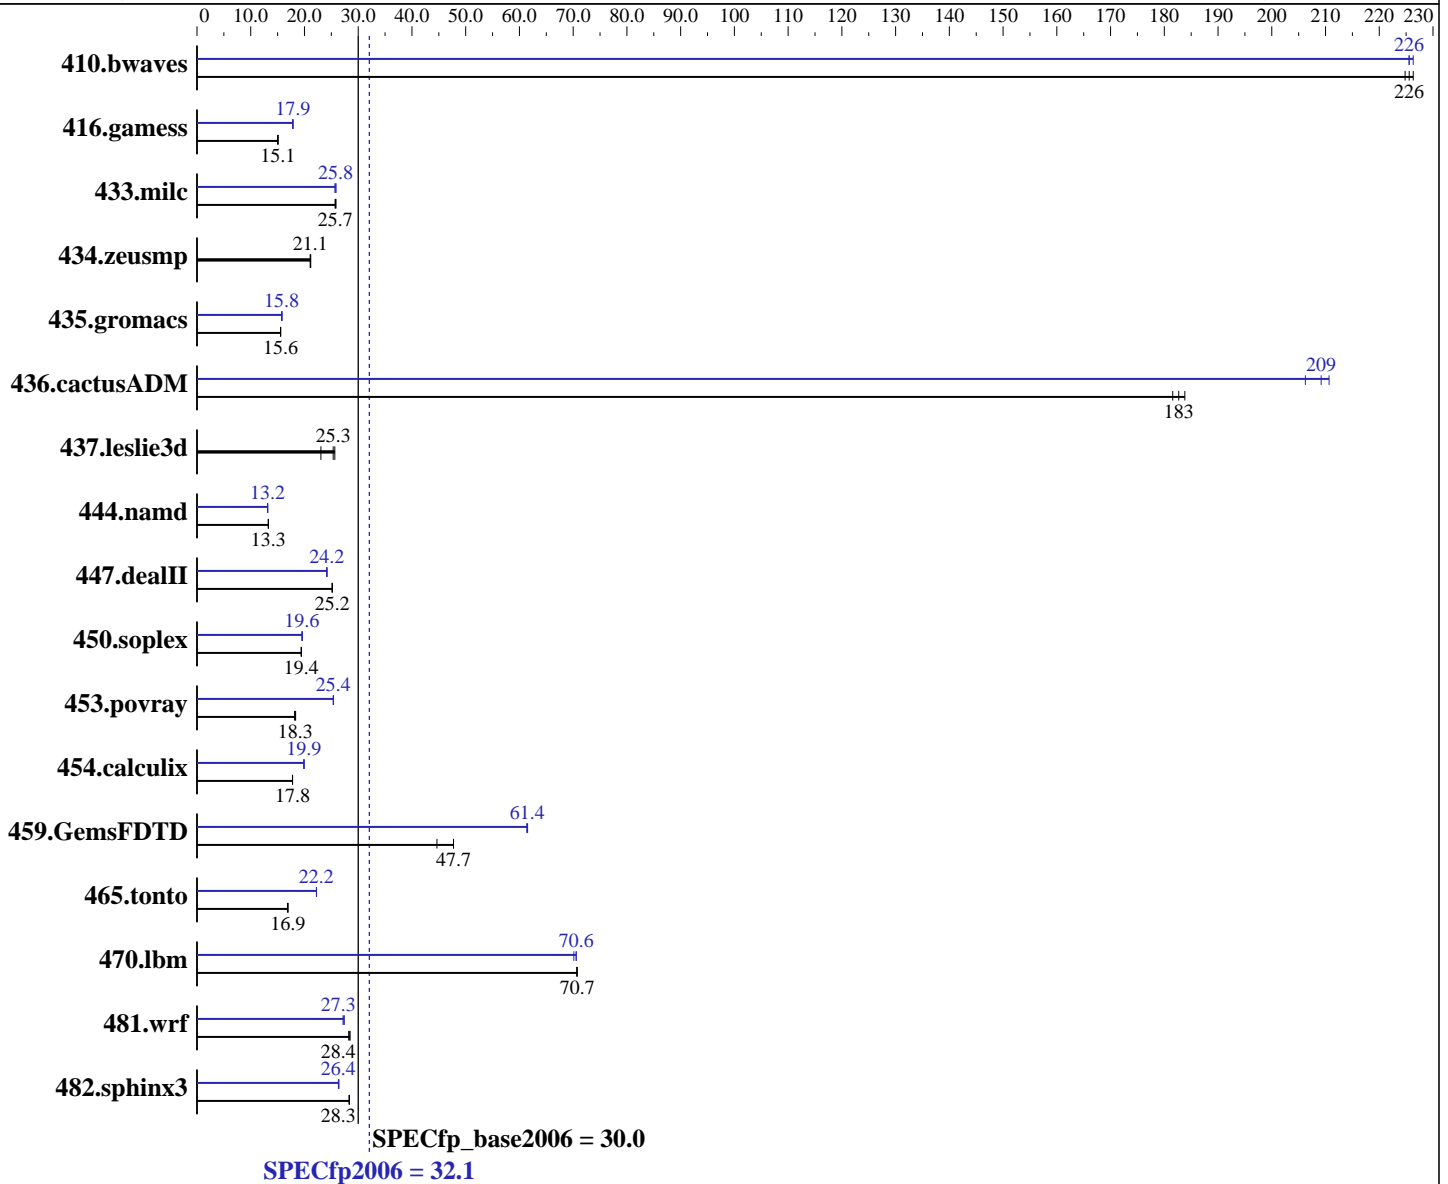

### Hardware

CPU Name: Intel Xeon E6540  
 CPU Characteristics: Intel Turbo Boost Technology up to 2.27 GHz  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: Red Hat Enterprise Linux 5 (x86\_64) Update 4 errata kernel (RHEL 5.4.z) kernel-2.6.18-164.9.1.el5.x86\_64  
 Compiler: Intel C++ and Fortran Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064, l\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 32.1

PowerEdge R810 (Intel Xeon E6540, 2.00 GHz)

SPECfp\_base2006 = 30.0

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

L3 Cache: 18 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 128 GB (32 x 4 GB DDR3-1066 QR RDIMM)  
 Disk Subsystem: 6 x 73 GB 15000 RPM SAS  
 Other Hardware: None

System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Binutils 2.18.50.0.7.20080502

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	60.5	225	<b>60.2</b>	<b>226</b>	60.0	226	60.2	226	60.0	226	<b>60.2</b>	<b>226</b>
416.gamess	<b>1299</b>	<b>15.1</b>	1297	15.1	1305	15.0	<b>1097</b>	<b>17.9</b>	1100	17.8	1095	17.9
433.milc	<b>357</b>	<b>25.7</b>	357	25.7	355	25.9	355	25.8	<b>355</b>	<b>25.8</b>	358	25.7
434.zeusmp	430	21.2	432	21.1	<b>431</b>	<b>21.1</b>	430	21.2	432	21.1	<b>431</b>	<b>21.1</b>
435.gromacs	459	15.5	<b>459</b>	<b>15.6</b>	459	15.6	451	15.8	453	15.7	<b>453</b>	<b>15.8</b>
436.cactusADM	65.8	182	65.0	184	<b>65.4</b>	<b>183</b>	57.9	206	56.7	211	<b>57.1</b>	<b>209</b>
437.leslie3d	366	25.6	<b>371</b>	<b>25.3</b>	408	23.1	366	25.6	<b>371</b>	<b>25.3</b>	408	23.1
444.namd	<b>604</b>	<b>13.3</b>	604	13.3	604	13.3	<b>610</b>	<b>13.2</b>	611	13.1	609	13.2
447.dealII	<b>455</b>	<b>25.2</b>	455	25.2	455	25.2	473	24.2	<b>473</b>	<b>24.2</b>	474	24.1
450.soplex	429	19.4	430	19.4	<b>430</b>	<b>19.4</b>	427	19.5	426	19.6	<b>426</b>	<b>19.6</b>
453.povray	290	18.4	293	18.2	<b>291</b>	<b>18.3</b>	210	25.4	<b>210</b>	<b>25.4</b>	209	25.4
454.calculix	464	17.8	<b>464</b>	<b>17.8</b>	464	17.8	415	19.9	414	19.9	<b>414</b>	<b>19.9</b>
459.GemsFDTD	238	44.7	<b>222</b>	<b>47.7</b>	222	47.7	172	61.5	<b>173</b>	<b>61.4</b>	173	61.4
465.tonto	<b>582</b>	<b>16.9</b>	585	16.8	581	16.9	442	22.2	443	22.2	<b>443</b>	<b>22.2</b>
470.lbm	194	70.7	<b>194</b>	<b>70.7</b>	194	70.7	<b>195</b>	<b>70.6</b>	195	70.6	196	70.1
481.wrf	<b>393</b>	<b>28.4</b>	393	28.5	396	28.2	<b>409</b>	<b>27.3</b>	411	27.2	408	27.4
482.sphinx3	<b>688</b>	<b>28.3</b>	687	28.4	689	28.3	741	26.3	<b>739</b>	<b>26.4</b>	739	26.4

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

vm.zone\_reclaim\_mode = 1 in /etc/sysctl.conf file  
 BIOS Settings:  
 Power Management = Maximum Performance (Default = Active Power Controller)

## General Notes

OMP\_NUM\_THREADS set to number of cores  
 KMP\_AFFINITY set to granularity=fine,scatter  
 KMP\_STACKSIZE set to 200M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 32.1

PowerEdge R810 (Intel Xeon E6540, 2.00 GHz)

SPECfp\_base2006 = 30.0

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Base Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
 416.gamess: -DSPEC\_CPU\_LP64  
 433.milc: -DSPEC\_CPU\_LP64  
 434.zeusmp: -DSPEC\_CPU\_LP64  
 435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
 436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
 437.leslie3d: -DSPEC\_CPU\_LP64  
 444.namd: -DSPEC\_CPU\_LP64  
 447.dealII: -DSPEC\_CPU\_LP64  
 450.soplex: -DSPEC\_CPU\_LP64  
 453.povray: -DSPEC\_CPU\_LP64  
 454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
 459.GemsFDTD: -DSPEC\_CPU\_LP64  
 465.tonto: -DSPEC\_CPU\_LP64  
 470.lbm: -DSPEC\_CPU\_LP64  
 481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
 482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 32.1

PowerEdge R810 (Intel Xeon E6540, 2.00 GHz)

SPECfp\_base2006 = 30.0

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Compiler Invocation

C benchmarks:

icc -m64

C++ benchmarks:

icpc -m64

Fortran benchmarks:

ifort -m64

Benchmarks using both Fortran and C:

icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-parallel -ansi-alias -auto-ilp32

482.sphinx3: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
-unroll2

C++ benchmarks:

444.namd: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-fno-alias -auto-ilp32

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 32.1

PowerEdge R810 (Intel Xeon E6540, 2.00 GHz)

SPECfp\_base2006 = 30.0

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

## Peak Optimization Flags (Continued)

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-calloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: Same as 454.calculix

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100330.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

Dell Inc.

SPECfp2006 = 32.1

PowerEdge R810 (Intel Xeon E6540, 2.00 GHz)

SPECfp\_base2006 = 30.0

CPU2006 license: 55

Test date: Mar-2010

Test sponsor: Dell Inc.

Hardware Availability: Mar-2010

Tested by: Dell Inc.

Software Availability: Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 07:47:07 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 27 April 2010.