



SPEC[®] CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint[®]_rate2006 = 216

ACTINA SOLAR 210 X3 (Intel Xeon E5620)

SPECint_rate_base2006 = 209

CPU2006 license: 9008


Test date: Apr-2010

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2010

Tested by: ACTION S.A.

Software Availability: Jan-2010

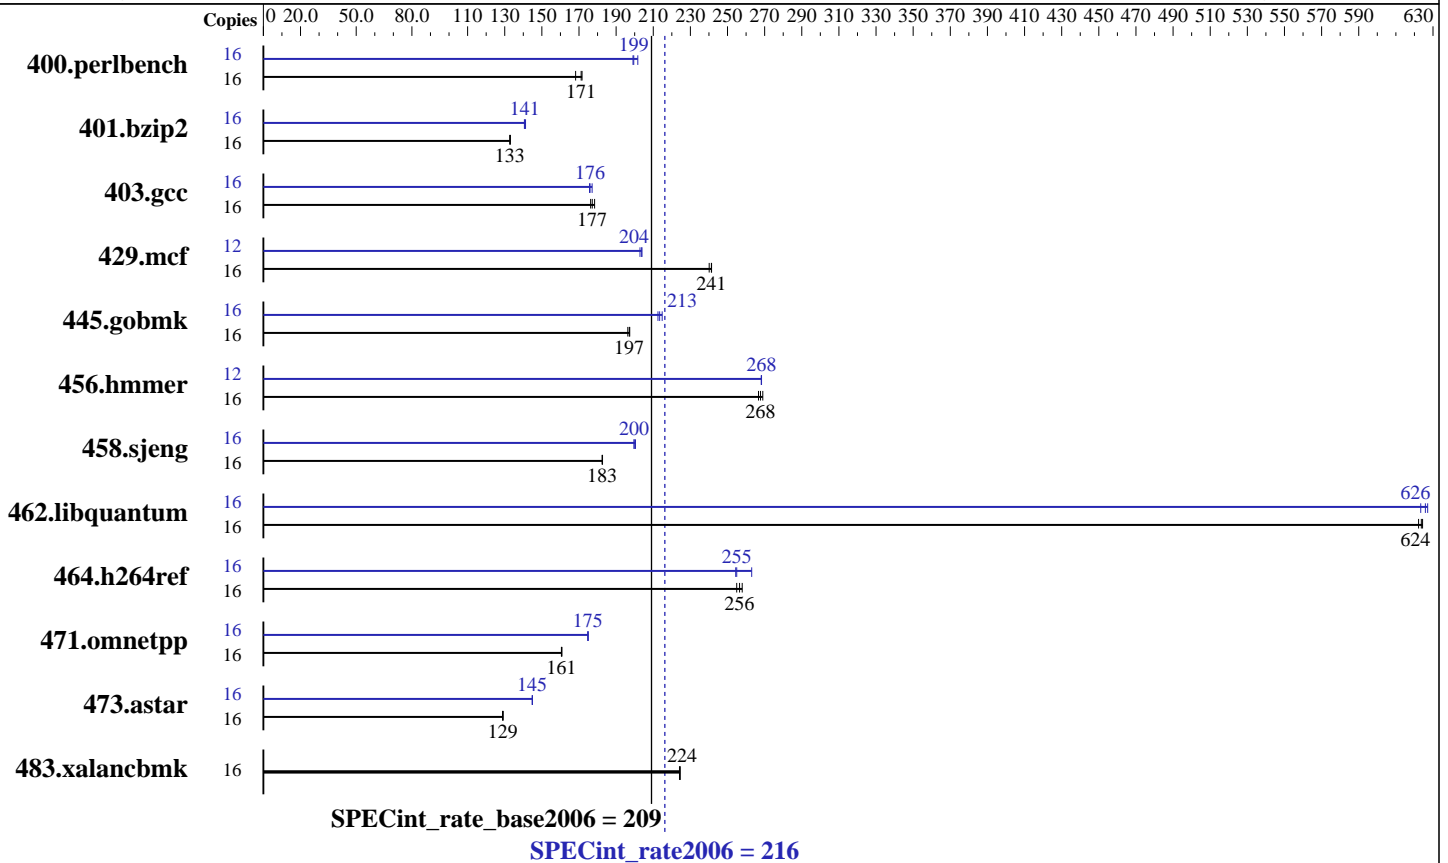

Hardware

CPU Name: Intel Xeon E5620
 CPU Characteristics: Intel Turbo Boost Technology up to 2.67 GHz
 CPU MHz: 2400
 FPU: Integrated
 CPU(s) enabled: 8 cores, 2 chips, 4 cores/chip, 2 threads/core
 CPU(s) orderable: 1,2 chips
 Primary Cache: 32 KB I + 32 KB D on chip per core
 Secondary Cache: 256 KB I+D on chip per core
 L3 Cache: 12 MB I+D on chip per chip
 Other Cache: None
 Memory: 24 GB (6 x 4 GB, PC3-10600R, ECC)
 Disk Subsystem: 1x 500 GB SATA, 7200 RPM
 Other Hardware: None

Software

Operating System: SUSE Linux Enterprise Server 11 (x86_64), Kernel 2.6.27.19-5-default
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1
 Build 20091130 Package ID: l_cproc_p_11.1.064
 Auto Parallel: No
 File System: ReiserFS
 System State: Run level 3 (multi-user)
 Base Pointers: 32-bit
 Peak Pointers: 32/64-bit
 Other Software: Microquill SmartHeap V8.1
 Binutils 2.18.50.0.7.20080502



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 216

ACTINA SOLAR 210 X3 (Intel Xeon E5620)

SPECint_rate_base2006 = 209

CPU2006 license: 9008

Test date: Apr-2010

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2010

Tested by: ACTION S.A.

Software Availability: Jan-2010

Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	16	911	172	<u>913</u>	<u>171</u>	929	168	16	<u>784</u>	<u>199</u>	775	202	785	199
401.bzip2	16	1163	133	1161	133	<u>1162</u>	<u>133</u>	16	1098	141	1093	141	<u>1096</u>	<u>141</u>
403.gcc	16	<u>727</u>	<u>177</u>	731	176	722	178	16	727	177	<u>732</u>	<u>176</u>	733	176
429.mcf	16	<u>605</u>	<u>241</u>	604	241	608	240	12	<u>537</u>	<u>204</u>	537	204	539	203
445.gobmk	16	851	197	<u>852</u>	<u>197</u>	855	196	16	781	215	790	213	<u>786</u>	<u>213</u>
456.hammer	16	<u>558</u>	<u>268</u>	555	269	560	267	12	418	268	417	268	<u>417</u>	<u>268</u>
458.sjeng	16	<u>1061</u>	<u>183</u>	1060	183	1061	183	16	966	200	970	200	<u>969</u>	<u>200</u>
462.libquantum	16	533	622	<u>532</u>	<u>624</u>	531	624	16	532	623	529	627	<u>530</u>	<u>626</u>
464.h264ref	16	1373	258	1389	255	<u>1380</u>	<u>256</u>	16	1346	263	<u>1389</u>	<u>255</u>	1392	254
471.omnetpp	16	622	161	<u>622</u>	<u>161</u>	623	161	16	<u>572</u>	<u>175</u>	571	175	572	175
473.astar	16	<u>870</u>	<u>129</u>	872	129	870	129	16	<u>775</u>	<u>145</u>	776	145	775	145
483.xalanbmk	16	<u>492</u>	<u>224</u>	492	224	493	224	16	<u>492</u>	<u>224</u>	492	224	493	224

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

Submit Notes

The config file option 'submit' was used.
numactl was used to bind copies to the cores

Base Compiler Invocation

C benchmarks:
icc -m32

C++ benchmarks:
icpc -m32

Base Portability Flags

400.perlbench: -DSPEC_CPU_LINUX_IA32
462.libquantum: -DSPEC_CPU_LINUX
483.xalanbmk: -DSPEC_CPU_LINUX

Base Optimization Flags

C benchmarks:
-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 216

ACTINA SOLAR 210 X3 (Intel Xeon E5620)

SPECint_rate_base2006 = 209

CPU2006 license: 9008

Test date: Apr-2010

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2010

Tested by: ACTION S.A.

Software Availability: Jan-2010

Base Optimization Flags (Continued)

C++ benchmarks:

```
-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

Base Other Flags

C benchmarks:

```
403.gcc: -Dalloca=_alloca
```

Peak Compiler Invocation

C benchmarks (except as noted below):

```
icc -m32
```

```
401.bzip2: icc -m64
```

```
456.hmmer: icc -m64
```

```
458.sjeng: icc -m64
```

```
462.libquantum: icc -m64
```

C++ benchmarks (except as noted below):

```
icpc -m32
```

```
473.astar: icpc -m64
```

Peak Portability Flags

```
400.perlbench: -DSPEC_CPU_LINUX_IA32
```

```
401.bzip2: -DSPEC_CPU_LP64
```

```
456.hmmer: -DSPEC_CPU_LP64
```

```
458.sjeng: -DSPEC_CPU_LP64
```

```
462.libquantum: -DSPEC_CPU_LP64 -DSPEC_CPU_LINUX
```

```
473.astar: -DSPEC_CPU_LP64
```

```
483.xalancbmk: -DSPEC_CPU_LINUX
```

Peak Optimization Flags

C benchmarks:

Continued on next page

Standard Performance Evaluation Corporation

info@spec.org

http://www.spec.org/



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 216

ACTINA SOLAR 210 X3 (Intel Xeon E5620)

SPECint_rate_base2006 = 209

CPU2006 license: 9008

Test date: Apr-2010

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2010

Tested by: ACTION S.A.

Software Availability: Jan-2010

Peak Optimization Flags (Continued)

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2
-ipo -no-prec-div -ansi-alias

456.hmmcr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2
-ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32
-opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -static(pass 2)
-prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
-O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
-ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

483.xalancbmk: basepeak = yes

Peak Other Flags

C benchmarks:

Continued on next page



SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

ACTION S.A.

SPECint_rate2006 = 216

ACTINA SOLAR 210 X3 (Intel Xeon E5620)

SPECint_rate_base2006 = 209

CPU2006 license: 9008

Test date: Apr-2010

Test sponsor: ACTION S.A.

Hardware Availability: Apr-2010

Tested by: ACTION S.A.

Software Availability: Jan-2010

Peak Other Flags (Continued)

403.gcc: -Dalloca=_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100316.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.
For other inquiries, please contact webmaster@spec.org.

Tested with SPEC CPU2006 v1.1.
Report generated on Wed Jul 23 06:55:28 2014 by SPEC CPU2006 PS/PDF formatter v6932.
Originally published on 11 May 2010.