



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## IBM Corporation

**SPECint®2006 = 38.2**

## IBM System x3500 M3 (Intel Xeon X5660)

**SPECint\_base2006 = 35.5**

CPU2006 license: 11


Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

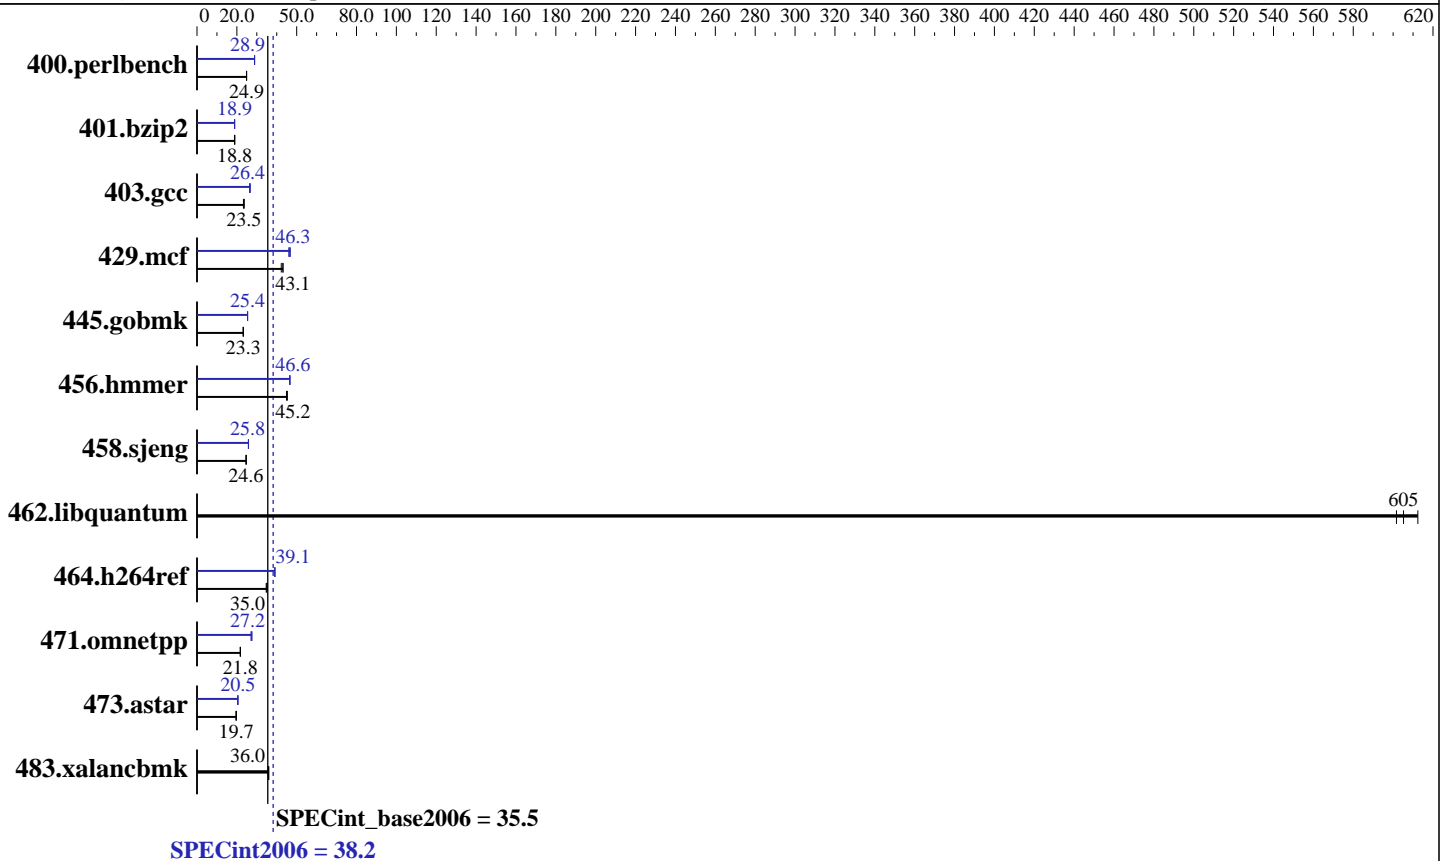

### Hardware

CPU Name: Intel Xeon X5660  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.20 GHz  
 CPU MHz: 2800  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chip  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 48 GB (12 x 4 GB PC3-10600R CL9, 2 Rank)  
 Disk Subsystem: 1 x 73 GB SAS, 15000 RPM  
 Other Hardware: None

### Software

Operating System: SuSe Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: 1\_cproc\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)  
 Base Pointers: 64-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 38.2

IBM System x3500 M3 (Intel Xeon X5660)

SPECint\_base2006 = 35.5

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	394	24.8	393	24.9	<u>393</u>	<u>24.9</u>	338	28.9	339	28.8	<u>338</u>	<u>28.9</u>
401.bzip2	513	18.8	<u>512</u>	<u>18.8</u>	508	19.0	512	18.9	<u>512</u>	<u>18.9</u>	511	18.9
403.gcc	<u>342</u>	<u>23.5</u>	346	23.3	340	23.7	301	26.7	<u>304</u>	<u>26.4</u>	305	26.4
429.mcf	216	42.3	<u>212</u>	<u>43.1</u>	211	43.2	<u>197</u>	<u>46.3</u>	198	46.1	195	46.8
445.gobmk	453	23.2	451	23.3	<u>451</u>	<u>23.3</u>	<u>413</u>	<u>25.4</u>	413	25.4	414	25.4
456.hammer	206	45.2	<u>206</u>	<u>45.2</u>	208	44.9	200	46.6	<u>200</u>	<u>46.6</u>	200	46.6
458.sjeng	<u>491</u>	<u>24.6</u>	490	24.7	491	24.6	468	25.8	<u>469</u>	<u>25.8</u>	469	25.8
462.libquantum	33.8	612	<u>34.2</u>	<u>605</u>	34.4	602	33.8	612	<u>34.2</u>	<u>605</u>	34.4	602
464.h264ref	638	34.7	<u>632</u>	<u>35.0</u>	630	35.2	567	39.0	566	39.1	<u>567</u>	<u>39.1</u>
471.omnetpp	287	21.8	288	21.7	<u>287</u>	<u>21.8</u>	230	27.2	226	27.6	<u>230</u>	<u>27.2</u>
473.astar	358	19.6	<u>357</u>	<u>19.7</u>	357	19.7	342	20.5	343	20.4	<u>343</u>	<u>20.5</u>
483.xalancbmk	<u>192</u>	<u>36.0</u>	192	36.0	192	35.8	<u>192</u>	<u>36.0</u>	192	36.0	192	35.8

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Platform Notes

Turbo Mode Enable  
Turbo Boost set to Traditional  
CPU C State Enable  
Data Reuse Disable

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502  
'ulimit -s unlimited' was used to set the stack size to unlimited prior to run  
OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 38.2

IBM System x3500 M3 (Intel Xeon X5660)

SPECint\_base2006 = 35.5

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX\_X64  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 429.mcf: -DSPEC\_CPU\_LP64  
 445.gobmk: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 464.h264ref: -DSPEC\_CPU\_LP64  
 471.omnetpp: -DSPEC\_CPU\_LP64  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m64

400.perlbench: icc -m32

429.mcf: icc -m32

445.gobmk: icc -m32

464.h264ref: icc -m32

C++ benchmarks (except as noted below):

icpc -m64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation

SPECint2006 = 38.2

IBM System x3500 M3 (Intel Xeon X5660)

SPECint\_base2006 = 35.5

CPU2006 license: 11

Test date: May-2010

Test sponsor: IBM Corporation

Hardware Availability: Jun-2010

Tested by: IBM Corporation

Software Availability: Jan-2010

## Peak Compiler Invocation (Continued)

471.omnetpp: icpc -m32

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
 401.bzip2: -DSPEC\_CPU\_LP64  
 403.gcc: -DSPEC\_CPU\_LP64  
 456.hmmer: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias -opt-prefetch

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div -static(pass 2) -prof-use(pass 2)  
 -auto-ilp32 -opt-prefetch -ansi-alias

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static -inline-calloc  
 -opt-malloc-options=3 -auto-ilp32

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmer: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4

462.libquantum: basepeak = yes

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

IBM Corporation SPECint2006 = 38.2

IBM System x3500 M3 (Intel Xeon X5660) SPECint\_base2006 = 35.5

<b>CPU2006 license:</b> 11	<b>Test date:</b> May-2010
<b>Test sponsor:</b> IBM Corporation	<b>Hardware Availability:</b> Jun-2010
<b>Tested by:</b> IBM Corporation	<b>Software Availability:</b> Jan-2010

## Peak Optimization Flags (Continued)

C++ benchmarks:

```
471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
             -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
             -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs
             -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap
```

```
473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)
            -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)
            -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs
            -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64
```

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100601.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 08:40:37 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 18 June 2010.