



# SPEC® CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

### SPECint®\_rate2006 = 354

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

### SPECint\_rate\_base2006 = 330

CPU2006 license: 9016


Test date: Jul-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

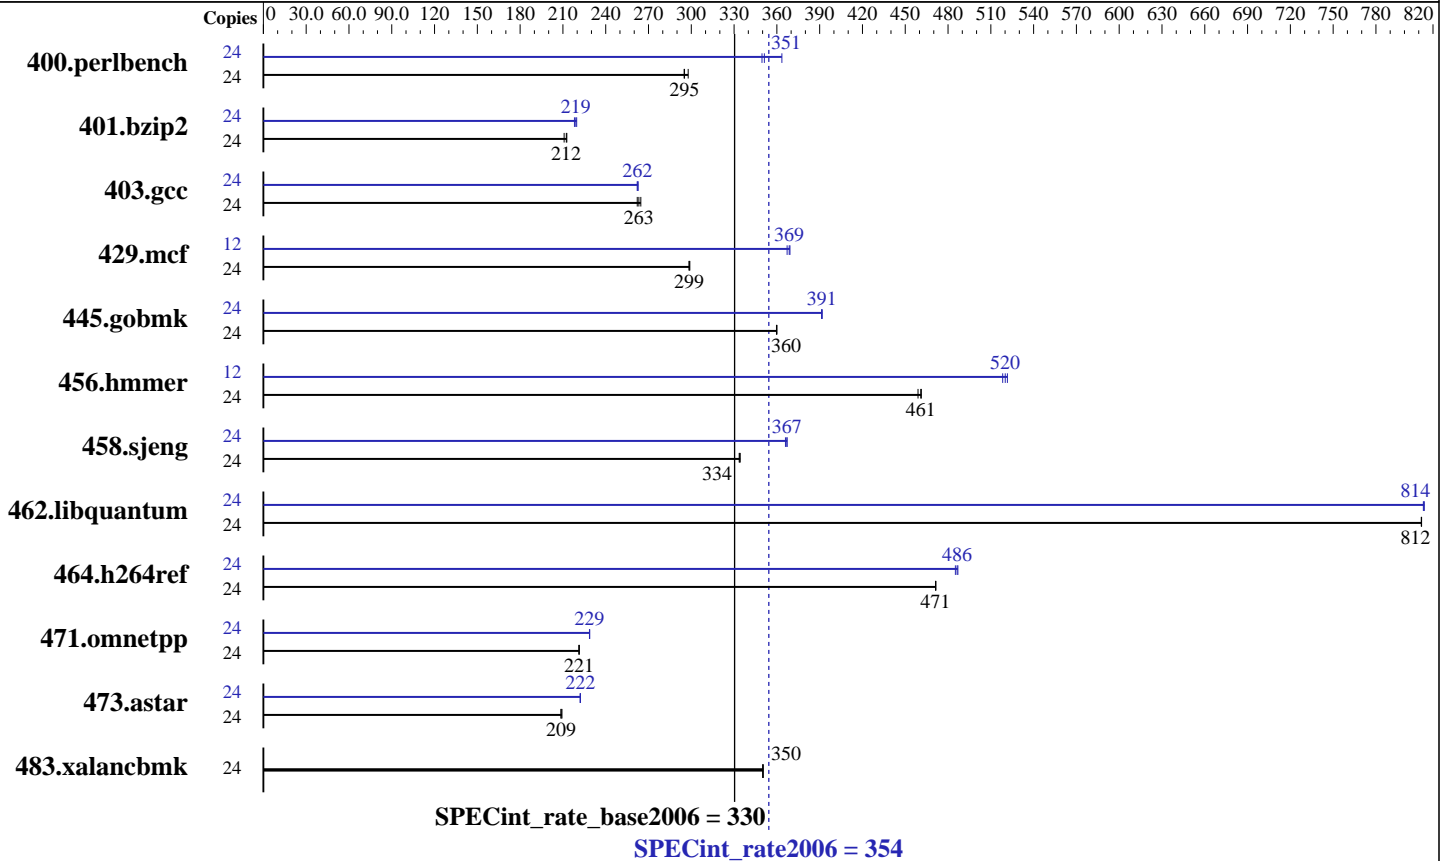

### Hardware

CPU Name: Intel Xeon X5670  
 CPU Characteristics: Intel Turbo Boost Technology up to 3.33 GHz  
 CPU MHz: 2933  
 FPU: Integrated  
 CPU(s) enabled: 12 cores, 2 chips, 6 cores/chip, 2 threads/core  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core  
 L3 Cache: 12 MB I+D on chip per chip  
 Other Cache: None  
 Memory: 24 GB (6 x 4 GB PC3-10600R, CL=9)  
 Disk Subsystem: HITACHI HDP725050GLA380 1 x 500 GB SATAII, 7200 RPM  
 Other Hardware: None

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64), Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ Professional Compiler for IA32 and Intel 64, Version 11.1 Build 20091130 Package ID: l\_cproc\_p\_11.1.064  
 Auto Parallel: No  
 File System: ReiserFS  
 System State: Run level 3 (multi-user)  
 Base Pointers: 32-bit  
 Peak Pointers: 32/64-bit  
 Other Software: Microquill SmartHeap V8.1



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## ASUSTeK Computer Inc.

SPECint\_rate2006 = 354

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

SPECint\_rate\_base2006 = 330

CPU2006 license: 9016

Test date: Jul-2010

Test sponsor: ASUSTeK Computer Inc.

Hardware Availability: Mar-2010

Tested by: ASUSTeK Computer Inc.

Software Availability: Jan-2010

## Results Table

Benchmark	Base							Peak						
	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Copies	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
400.perlbench	24	<b>794</b>	<b>295</b>	795	295	787	298	24	<b>668</b>	<b>351</b>	645	364	671	350
401.bzip2	24	1089	213	<b>1090</b>	<b>212</b>	1098	211	24	<b>1057</b>	<b>219</b>	1062	218	1054	220
403.gcc	24	<b>734</b>	<b>263</b>	730	265	737	262	24	735	263	737	262	<b>736</b>	<b>262</b>
429.mcf	24	732	299	<b>733</b>	<b>299</b>	733	298	12	298	367	<b>297</b>	<b>369</b>	296	369
445.gobmk	24	<b>700</b>	<b>360</b>	699	360	700	360	24	<b>643</b>	<b>391</b>	643	391	643	392
456.hammer	24	<b>486</b>	<b>461</b>	488	459	485	461	12	<b>215</b>	<b>520</b>	215	522	216	518
458.sjeng	24	871	334	<b>870</b>	<b>334</b>	869	334	24	793	366	791	367	<b>791</b>	<b>367</b>
462.libquantum	24	<b>613</b>	<b>812</b>	612	812	613	812	24	611	813	<b>611</b>	<b>814</b>	611	814
464.h264ref	24	1127	471	1127	471	<b>1127</b>	<b>471</b>	24	1095	485	1091	487	<b>1092</b>	<b>486</b>
471.omnetpp	24	<b>678</b>	<b>221</b>	677	221	678	221	24	656	229	<b>656</b>	<b>229</b>	656	229
473.astar	24	807	209	805	209	<b>807</b>	<b>209</b>	24	758	222	<b>758</b>	<b>222</b>	759	222
483.xalancbmk	24	473	350	473	350	<b>473</b>	<b>350</b>	24	473	350	473	350	<b>473</b>	<b>350</b>

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Submit Notes

The config file option 'submit' was used.  
numactl was used to bind copies to the cores

## Operating System Notes

'ulimit -s unlimited' was used to set the stack size to unlimited prior to run

## Component Notes

Tested system case compliance with Intel EEB 3.61 spec  
SSI Server Power Supply 650W or higher  
System was configured with ASPEED AST2050 VGA (on board VGA)

## General Notes

Binaries were compiled on SLES 10 with Binutils 2.18.50.0.7.20080502

## Base Compiler Invocation

C benchmarks:  
icc -m32

C++ benchmarks:  
icpc -m32



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 354**

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

**SPECint\_rate\_base2006 = 330**

**CPU2006 license:** 9016

**Test date:** Jul-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Base Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
462.libquantum: -DSPEC\_CPU\_LINUX  
483.xalancbmk: -DSPEC\_CPU\_LINUX

## Base Optimization Flags

C benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

C++ benchmarks:

-xSSE4.2 -ipo -O3 -no-prec-div -opt-prefetch -Wl,-z,muldefs  
-L/home/cmplr/usr3/alrahate/cpu2006.1.1.icl1.1/libicl1.1-32bit -lsmarheap

## Base Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

## Peak Compiler Invocation

C benchmarks (except as noted below):

icc -m32

401.bzip2: icc -m64

456.hmmer: icc -m64

458.sjeng: icc -m64

462.libquantum: icc -m64

C++ benchmarks (except as noted below):

icpc -m32

473.astar: icpc -m64

## Peak Portability Flags

400.perlbench: -DSPEC\_CPU\_LINUX\_IA32  
401.bzip2: -DSPEC\_CPU\_LP64

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 354**

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

**SPECint\_rate\_base2006 = 330**

**CPU2006 license:** 9016

**Test date:** Jul-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Peak Portability Flags (Continued)

456.hmmr: -DSPEC\_CPU\_LP64  
 458.sjeng: -DSPEC\_CPU\_LP64  
 462.libquantum: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_LINUX  
 473.astar: -DSPEC\_CPU\_LP64  
 483.xalancbmk: -DSPEC\_CPU\_LINUX

## Peak Optimization Flags

C benchmarks:

400.perlbench: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -ansi-alias

401.bzip2: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -opt-prefetch -ansi-alias -auto-ilp32

403.gcc: -xSSE4.2 -ipo -O3 -no-prec-div -static

429.mcf: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch

445.gobmk: -xSSE4.2(pass 2) -prof-gen(pass 1) -prof-use(pass 2) -O2  
 -ipo -no-prec-div -ansi-alias

456.hmmr: -xSSE4.2 -ipo -O3 -no-prec-div -static -unroll2  
 -ansi-alias -auto-ilp32

458.sjeng: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll4 -auto-ilp32

462.libquantum: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32  
 -opt-prefetch

464.h264ref: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -static(pass 2)  
 -prof-use(pass 2) -unroll2 -ansi-alias

C++ benchmarks:

471.omnetpp: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=block -Wl,-z,muldefs  
 -L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-32bit -lsmartheap

473.astar: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2)  
 -O3(pass 2) -no-prec-div(pass 2) -prof-use(pass 2)  
 -ansi-alias -opt-ra-region-strategy=routine -Wl,-z,muldefs

Continued on next page



# SPEC CINT2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**ASUSTeK Computer Inc.**

**SPECint\_rate2006 = 354**

ASUS TS500-E6 (Z8NA-D6) server system (Intel Xeon X5670)

**SPECint\_rate\_base2006 = 330**

**CPU2006 license:** 9016

**Test date:** Jul-2010

**Test sponsor:** ASUSTeK Computer Inc.

**Hardware Availability:** Mar-2010

**Tested by:** ASUSTeK Computer Inc.

**Software Availability:** Jan-2010

## Peak Optimization Flags (Continued)

473.astar (continued):

`-L/home/cmplr/usr3/alrahate/cpu2006.1.1.ic11.1/libic11.1-64bit -lsmartheap64`

483.xalancbmk: basepeak = yes

## Peak Other Flags

C benchmarks:

403.gcc: -Dalloca=\_alloca

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revF.20100609.xml>

SPEC and SPECint are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.

Report generated on Wed Jul 23 11:49:58 2014 by SPEC CPU2006 PS/PDF formatter v6932.

Originally published on 17 August 2010.