



# SPEC<sup>®</sup> CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5503)

SPECfp<sup>®</sup>2006 = **26.4**

SPECfp\_base2006 = **25.2**

CPU2006 license: 9006


Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Aug-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

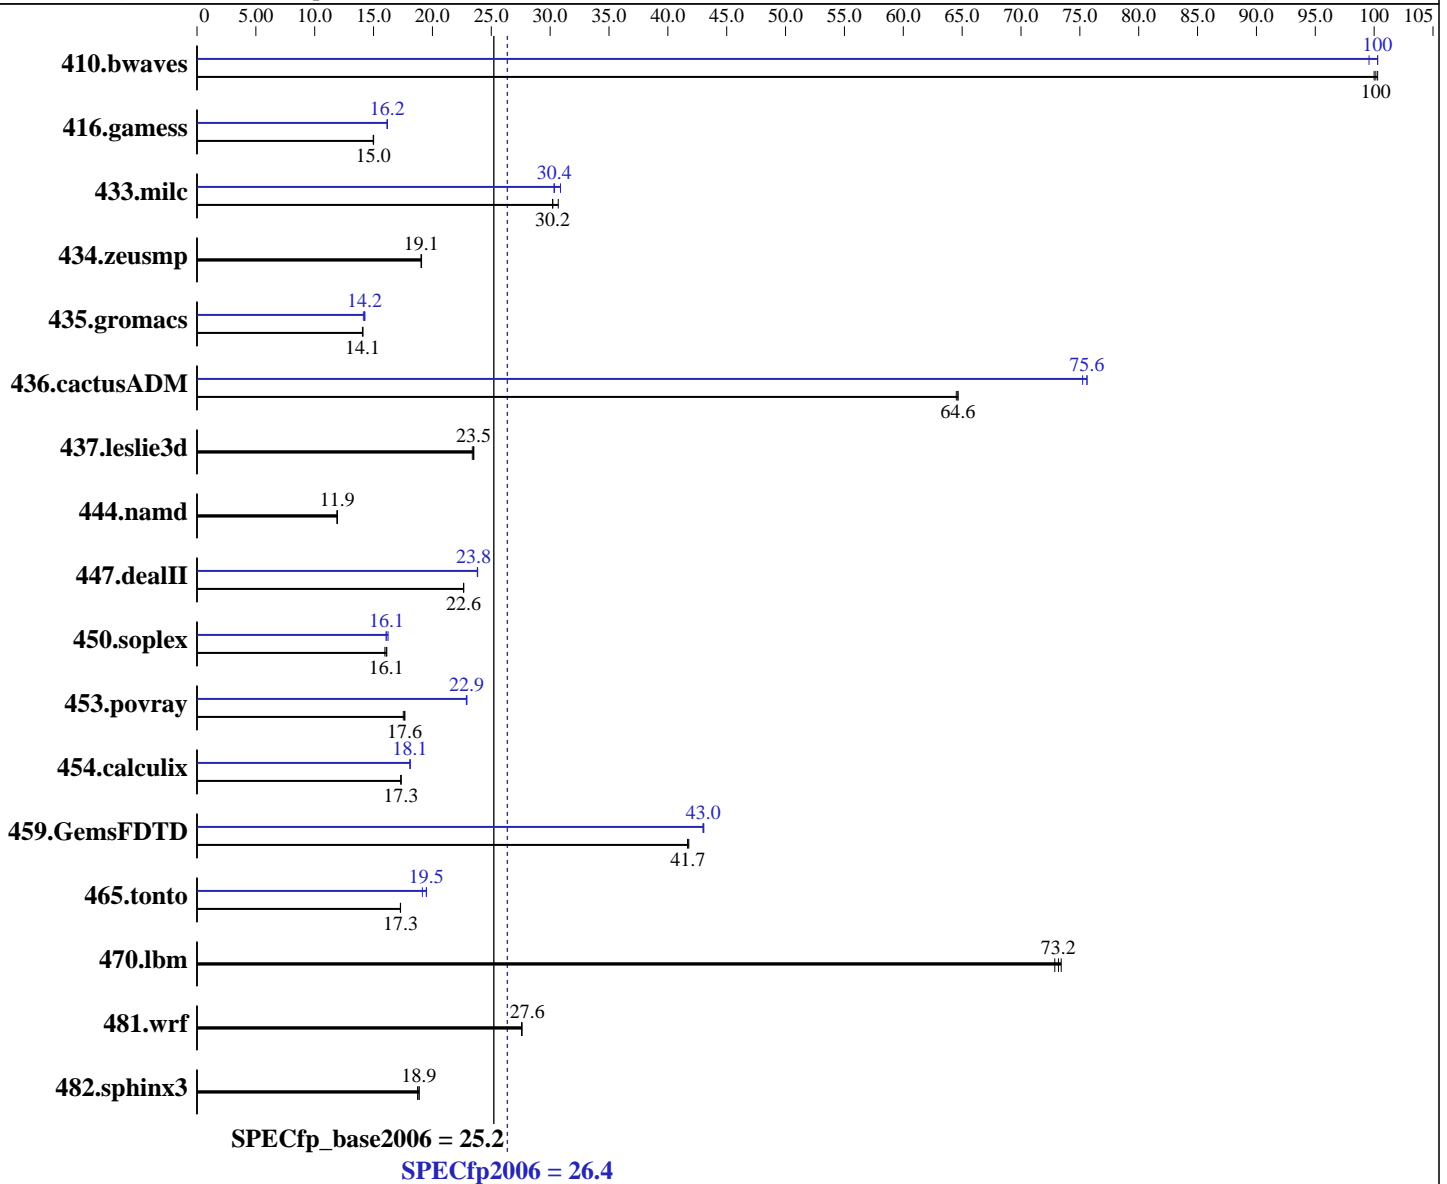

### Hardware

CPU Name: Intel Xeon E5503  
 CPU Characteristics:  
 CPU MHz: 2000  
 FPU: Integrated  
 CPU(s) enabled: 4 cores, 2 chips, 2 cores/chip  
 CPU(s) orderable: 1,2 chips  
 Primary Cache: 32 KB I + 32 KB D on chip per core  
 Secondary Cache: 256 KB I+D on chip per core

Continued on next page

### Software

Operating System: SUSE Linux Enterprise Server 11 (x86\_64),  
Kernel 2.6.27.19-5-default  
 Compiler: Intel C++ and Fortran Professional Compiler for  
IA32 and Intel 64, Version 11.1  
Build 20091130 Package ID: I\_cproc\_p\_11.1.064,  
I\_cprof\_p\_11.1.064  
 Auto Parallel: Yes  
 File System: ext3  
 System State: Run level 3 (multi-user)

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5503)

SPECfp2006 = **26.4**

SPECfp\_base2006 = **25.2**

CPU2006 license: 9006

Test sponsor: NEC Corporation

Tested by: NEC Corporation

Test date: Aug-2010

Hardware Availability: Jun-2010

Software Availability: Dec-2009

L3 Cache: 4 MB I+D on chip per chip  
Other Cache: None  
Memory: 48 GB (12 x 4 GB PC3L-10600R, 2 rank, CL9, ECC, running at 800 MHz)  
Disk Subsystem: 1x160 GB SATA, 7200 RPM  
Other Hardware: None

Base Pointers: 64-bit  
Peak Pointers: 32/64-bit  
Other Software: None

## Results Table

Benchmark	Base						Peak					
	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio	Seconds	Ratio
410.bwaves	<b>136</b>	<b>100</b>	135	100	136	100	<b>136</b>	<b>100</b>	136	99.6	135	100
416.gamess	1305	15.0	<b>1306</b>	<b>15.0</b>	1307	15.0	1213	16.1	1210	16.2	<b>1211</b>	<b>16.2</b>
433.milc	299	30.7	<b>304</b>	<b>30.2</b>	304	30.2	<b>302</b>	<b>30.4</b>	297	30.9	303	30.3
434.zeusmp	477	19.1	478	19.0	<b>477</b>	<b>19.1</b>	477	19.1	478	19.0	<b>477</b>	<b>19.1</b>
435.gromacs	507	14.1	508	14.1	<b>507</b>	<b>14.1</b>	501	14.3	505	14.1	<b>502</b>	<b>14.2</b>
436.cactusADM	185	64.6	<b>185</b>	<b>64.6</b>	185	64.5	158	75.6	159	75.2	<b>158</b>	<b>75.6</b>
437.leslie3d	<b>400</b>	<b>23.5</b>	400	23.5	402	23.4	<b>400</b>	<b>23.5</b>	400	23.5	402	23.4
444.namd	673	11.9	<b>673</b>	<b>11.9</b>	674	11.9	673	11.9	<b>673</b>	<b>11.9</b>	674	11.9
447.dealII	505	22.6	<b>505</b>	<b>22.6</b>	505	22.7	<b>480</b>	<b>23.8</b>	480	23.8	480	23.8
450.soplex	<b>519</b>	<b>16.1</b>	523	16.0	517	16.1	519	16.1	514	16.2	<b>517</b>	<b>16.1</b>
453.povray	<b>302</b>	<b>17.6</b>	301	17.7	304	17.5	232	22.9	<b>232</b>	<b>22.9</b>	233	22.9
454.calculix	<b>476</b>	<b>17.3</b>	476	17.3	476	17.3	456	18.1	<b>456</b>	<b>18.1</b>	456	18.1
459.GemsFDTD	254	41.8	255	41.7	<b>254</b>	<b>41.7</b>	<b>247</b>	<b>43.0</b>	246	43.1	247	43.0
465.tonto	<b>569</b>	<b>17.3</b>	569	17.3	570	17.3	505	19.5	<b>505</b>	<b>19.5</b>	514	19.1
470.lbm	189	72.9	<b>188</b>	<b>73.2</b>	187	73.4	189	72.9	<b>188</b>	<b>73.2</b>	187	73.4
481.wrf	<b>405</b>	<b>27.6</b>	405	27.6	405	27.6	<b>405</b>	<b>27.6</b>	405	27.6	405	27.6
482.sphinx3	<b>1033</b>	<b>18.9</b>	1033	18.9	1040	18.7	<b>1033</b>	<b>18.9</b>	1033	18.9	1040	18.7

Results appear in the order in which they were run. Bold underlined text indicates a median measurement.

## Operating System Notes

'ulimit -s unlimited' was used to set the stacksize to unlimited prior to run

## Platform Notes

BIOS setting:  
NUMA configuration : Disabled

## General Notes

OMP\_NUM\_THREADS set to number of cores  
KMP\_AFFINITY set to granularity=fine,scatter  
KMP\_STACKSIZE set to 200M



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/GT120b  
(Intel Xeon E5503)

**SPECfp2006 = 26.4**

**SPECfp\_base2006 = 25.2**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Aug-2010  
**Hardware Availability:** Jun-2010  
**Software Availability:** Dec-2009

## Base Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Base Portability Flags

410.bwaves: -DSPEC\_CPU\_LP64  
416.gamess: -DSPEC\_CPU\_LP64  
433.milc: -DSPEC\_CPU\_LP64  
434.zeusmp: -DSPEC\_CPU\_LP64  
435.gromacs: -DSPEC\_CPU\_LP64 -nofor\_main  
436.cactusADM: -DSPEC\_CPU\_LP64 -nofor\_main  
437.leslie3d: -DSPEC\_CPU\_LP64  
444.namd: -DSPEC\_CPU\_LP64  
447.dealII: -DSPEC\_CPU\_LP64  
450.soplex: -DSPEC\_CPU\_LP64  
453.povray: -DSPEC\_CPU\_LP64  
454.calculix: -DSPEC\_CPU\_LP64 -nofor\_main  
459.GemsFDTD: -DSPEC\_CPU\_LP64  
465.tonto: -DSPEC\_CPU\_LP64  
470.lbm: -DSPEC\_CPU\_LP64  
481.wrf: -DSPEC\_CPU\_LP64 -DSPEC\_CPU\_CASE\_FLAG -DSPEC\_CPU\_LINUX  
482.sphinx3: -DSPEC\_CPU\_LP64

## Base Optimization Flags

C benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

C++ benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Fortran benchmarks:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch

Benchmarks using both Fortran and C:  
-xSSE4.2 -ipo -O3 -no-prec-div -static -parallel -opt-prefetch



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

**NEC Corporation**

Express5800/GT120b  
(Intel Xeon E5503)

**SPECfp2006 = 26.4**

**SPECfp\_base2006 = 25.2**

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Aug-2010  
**Hardware Availability:** Jun-2010  
**Software Availability:** Dec-2009

## Peak Compiler Invocation

C benchmarks:  
icc -m64

C++ benchmarks:  
icpc -m64

Fortran benchmarks:  
ifort -m64

Benchmarks using both Fortran and C:  
icc -m64 ifort -m64

## Peak Portability Flags

Same as Base Portability Flags

## Peak Optimization Flags

C benchmarks:

433.milc: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-ansi-alias

470.lbm: basepeak = yes

482.sphinx3: basepeak = yes

C++ benchmarks:

444.namd: basepeak = yes

447.dealII: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -ansi-alias -scalar-rep- -auto-ilp32

450.soplex: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-malloc-options=3 -auto-ilp32

453.povray: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll4 -ansi-alias

Fortran benchmarks:

Continued on next page



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5503)

**SPECfp2006 = 26.4**

**SPECfp\_base2006 = 25.2**

**CPU2006 license:** 9006

**Test sponsor:** NEC Corporation

**Tested by:** NEC Corporation

**Test date:** Aug-2010

**Hardware Availability:** Jun-2010

**Software Availability:** Dec-2009

## Peak Optimization Flags (Continued)

410.bwaves: -xSSE4.2 -ipo -O3 -no-prec-div -static -opt-prefetch  
-parallel

416.gamess: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -ansi-alias -scalar-rep-

434.zeusmp: basepeak = yes

437.leslie3d: basepeak = yes

459.GemsFDTD: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -Ob0 -opt-prefetch -parallel

465.tonto: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-inline-alloc -opt-malloc-options=3 -auto -unroll4

Benchmarks using both Fortran and C:

435.gromacs: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-opt-prefetch -auto-ilp32

436.cactusADM: -xSSE4.2(pass 2) -prof-gen(pass 1) -ipo(pass 2) -O3(pass 2)  
-no-prec-div(pass 2) -static(pass 2) -prof-use(pass 2)  
-unroll2 -opt-prefetch -parallel -auto-ilp32

454.calculix: -xSSE4.2 -ipo -O3 -no-prec-div -static -auto-ilp32

481.wrf: basepeak = yes

The flags file that was used to format this result can be browsed at

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100901.html>

You can also download the XML flags source by saving the following link:

<http://www.spec.org/cpu2006/flags/Intel-ic11.1-linux64-revE.20100901.xml>



# SPEC CFP2006 Result

Copyright 2006-2014 Standard Performance Evaluation Corporation

## NEC Corporation

Express5800/GT120b  
(Intel Xeon E5503)

SPECfp2006 = 26.4

SPECfp\_base2006 = 25.2

**CPU2006 license:** 9006  
**Test sponsor:** NEC Corporation  
**Tested by:** NEC Corporation

**Test date:** Aug-2010  
**Hardware Availability:** Jun-2010  
**Software Availability:** Dec-2009

SPEC and SPECfp are registered trademarks of the Standard Performance Evaluation Corporation. All other brand and product names appearing in this result are trademarks or registered trademarks of their respective holders.

For questions about this result, please contact the tester.  
For other inquiries, please contact [webmaster@spec.org](mailto:webmaster@spec.org).

Tested with SPEC CPU2006 v1.1.  
Report generated on Wed Jul 23 12:13:26 2014 by SPEC CPU2006 PS/PDF formatter v6932.  
Originally published on 31 August 2010.